

Public Health Assessment

Final Release

ORLANDO GASIFICATION PLANT

ORLANDO, ORANGE COUNTY, FLORIDA

EPA FACILITY ID: FLD984169235

**Prepared by
Florida Department of Health**

AUGUST 10, 2017

Prepared under a Cooperative Agreement with the
U.S. DEPARTMENT OF HEALTH AND HUMAN SERVICES
Agency for Toxic Substances and Disease Registry
Division of Community Health Investigations
Atlanta, Georgia 30333

THE ATSDR PUBLIC HEALTH ASSESSMENT: A NOTE OF EXPLANATION

This Public Health Assessment was prepared by ATSDR's Cooperative Agreement Partner pursuant to the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA or Superfund) section 104 (i)(6) (42 U.S.C. 9604 (i)(6)), and in accordance with our implementing regulations (42 C.F.R. Part 90). In preparing this document, ATSDR's Cooperative Agreement Partner has collected relevant health data, environmental data, and community health concerns from the Environmental Protection Agency (EPA), state and local health and environmental agencies, the community, and potentially responsible parties, where appropriate.

In addition, this document has previously been provided to EPA and the affected states in an initial release, as required by CERCLA section 104 (i)(6)(H) for their information and review. The revised document was released for a 60-day public comment period. Subsequent to the public comment period, ATSDR's Cooperative Agreement Partner addressed all public comments and revised or appended the document as appropriate. The public health assessment has now been reissued. This concludes the public health assessment process for this site, unless additional information is obtained by ATSDR's Cooperative Agreement Partner which, in the agency's opinion, indicates a need to revise or append the conclusions previously issued.

Use of trade names is for identification only and does not constitute endorsement by the U.S. Department of Health and Human Services. Additional copies of this report are available from:

National Technical Information Service, Springfield, Virginia
(703) 605-6000

You May Contact ATSDR Toll Free at
1-800-CDC-INFO

or

Visit our Home Page at: <http://www.atsdr.cdc.gov>

PUBLIC HEALTH ASSESSMENT

ORLANDO GASIFICATION PLANT

ORLANDO, ORANGE COUNTY, FLORIDA

EPA FACILITY ID: FLD984169235

Prepared by:

Florida Department of Health
Division of Disease Control and Health Protection
Under Cooperative Agreement with
U.S. Department of Health and Human Services
Agency for Toxic Substances and Disease Registry

Table of Contents

Foreword	1
Summary	1
Background and Statement of Issues	4
Site Description.....	5
Demographics	6
Land Use	6
Community Health Concerns.....	6
Discussion.....	7
Environmental Data	7
Soil	7
Soil Vapor	7
Pathway Analyses	8
Completed Exposure Pathway	9
Potential Exposure Pathway	9
Eliminated Exposure Pathways.....	9
Identifying Contaminants of Concern.....	10
Arsenic	10
Dibenz(a,h)anthracene (DBA)	11
Lead.....	11
Polycyclic Aromatic Hydrocarbons (PAHs).....	12
Polychlorinated Biphenyls (PCBs)	13
Public Health Implications.....	13
Non-Cancer & Cancer Health Effects, Health Evaluation.....	16
Soil	16
On-Site Surface Soil – Worker Exposure	16
Off-Site Surface Soil – Residential Exposure.....	19
Off-Site Surface Soil (along West Robinson Street and Chatham Avenue) – Pedestrian Exposure	22
Off-Site Commercial Surface Soil (Along the Railroad Track Northeast and Northwest of the Site) – Trespasser Exposure	24
On-Site Vapor Intrusion – Worker Exposure	26
Health Outcome Data.....	26
Child Health Considerations	27
Conclusions.....	27
Recommendations.....	28
Public Health Action Plan.....	28
Actions Completed.....	28
Actions Planned	28
Report Preparation	29
References.....	30
Appendices.....	33
Selected Information from EPA Record of Decision (ROD)	34
Tables.....	39
Figures.....	55
Potency Equivalency Factors (PEFs).....	62
Information on Lead	64
Response to Public Comments.....	70
Glossary	71

Foreword

The Florida Department of Health (DOH) evaluates the public health threat of hazardous waste sites through a cooperative agreement with the federal Agency for Toxic Substances and Disease Registry (ATSDR) in Atlanta, Georgia. This health consultation is part of an ongoing effort to evaluate health effects associated with the Orlando Gasification Plant hazardous waste site in Orlando, Florida. The DOH evaluates site-related public health issues through the following processes:

- **Evaluating exposure:** DOH scientists review available information about environmental conditions at the site. The first task is to find out how much contamination is present, where it is on the site, and how human exposures might occur. The U.S. Environmental Protection Agency (EPA) provided the information for this assessment.
- **Evaluating health effects:** If DOH finds evidence that exposures to hazardous substances are occurring or might occur, their scientists will determine whether that exposure could be harmful to human health. DOH focuses this report on public health; that is, the health impact on the community as a whole, and bases it on existing scientific information.
- **Developing recommendations:** In this report, the DOH outlines, in plain language, its conclusions regarding any potential health threat posed by contaminated soil, groundwater, and vapor, and offers recommendations for reducing or eliminating human exposure to contaminants. The role of the DOH in dealing with hazardous waste sites is primarily advisory. For that reason, the evaluation report will typically recommend actions for other agencies, including the U.S. EPA and the Florida Department of Environmental Protection (FDEP). If, however, an immediate health threat exists or is imminent, DOH will issue a public health advisory warning people of the danger, and will work to resolve the problem.
- **Soliciting community input:** The evaluation process is interactive. The DOH starts by soliciting and evaluating information from various government agencies, individuals or organizations responsible for cleaning up the site, and those living in communities near the site. DOH shares any conclusions about the site with the groups and organizations providing the information. Once DOH prepares an evaluation report, they seek feedback from the public.

If you have questions or comments about this report, please write to us at

Florida Department of Health
Division of Disease Control and Health Protection
4052 Bald Cypress Way, Bin # A-12
Tallahassee, FL 32399-1720

Or, call us at (850) 245-4401 or toll-free in Florida: 1-877-798-2772

Summary

INTRODUCTION

At the Orlando Gasification Plant hazardous waste site, the Florida Department of Health (DOH) and the U.S. Agency for Toxic Substances and Disease Registry's (ATSDR) top priority is to ensure nearby residents have the best information to safeguard their health. The purpose of this public health assessment report is to assess the public health threat from toxic chemicals in groundwater, soil, and air at the former Orlando Gasification Plant hazardous waste site. The U.S. Environmental Protection Agency (EPA) requested this assessment.

The Orlando Gasification Plant site is north and south of 500-600 West Robinson Street in Orlando, Florida. Between 1887 and 1960, the site was an active manufactured gas plant. The owners used coal to make gas for use in lamps and stoves. They also made a number of by-products. Over time, the plant polluted on-site soil and groundwater. In 1960, after natural gas came to the city, the owners closed and took down the plant. Since then, groundwater pollution has spread to almost a mile northeast of the site.

Between September 20, 2016 and November 14, 2016, DOH solicited public comments for the draft version of this report. DOH's responses to public comments are in Appendix F of this report.

OVERVIEW

DOH reached six conclusions regarding the Orlando Gasification Plant Site.

CONCLUSION #1

DOH is not able to conclude whether chemicals are present in indoor air that may harm current or future on-site workers because indoor air data are not available.

BASIS FOR DECISION #1

Available on-site soil vapor and radon gas data do not indicate that sub slab gas is migrating into onsite buildings at levels of concern. Uncertainty in these data and the absence of indoor air testing, however, preclude a definitive health conclusion. Evaluating seasonal and spatial variability of indoor air quality is necessary to understand reasonable maximum exposures. Actions taken as part of the Record of Decision (Appendix A) will help protect against harmful vapor intrusion exposures.

NEXT STEPS #1	Florida DOH recommends indoor air sampling to evaluate exposures in buildings currently onsite. DOH also recommends health protective measures and monitoring during cleanup. Vapor mitigation systems may be appropriate when designing and constructing new buildings on site properties. Establish operation, maintenance and monitoring plans for any new vapor mitigation systems.
CONCLUSION #2	DOH concludes that incidental ingestion (swallowing) of contaminants in on-site surface soils is not expected to harm workers' health.
BASIS FOR DECISION #2	Contaminants in the on-site surface soils are below levels likely to harm health.
CONCLUSION #3	DOH concludes that incidental ingestion of contaminants in off-site surface soil is not expected to harm the health of residents.
BASIS FOR DECISION #3	Contaminants in the off-site surface soils at residences near the site are below levels likely to harm health.
CONCLUSION #4	DOH concludes that incidental ingestion of contaminants in off-site surface soil along West Robinson Street and Chatham Avenue is not expected to harm the health of pedestrians.
BASIS FOR DECISION #4	Contaminants in the off-site surface soils along West Robinson Street and Chatham Avenue near the site are below levels likely to harm health.
CONCLUSION #5	DOH concludes that incidental ingestion of contaminants in surface soil along the railroad track north of the site is not expected to harm trespassers' health.

**BASIS FOR
DECISION #5**

Contaminants in the surface soils along the railroad track north of the site are below levels likely to harm health.

CONCLUSION #6

DOH concludes that since people do not come into contact with contaminants in groundwater or on-site or nearby subsurface soils, they will not harm people's health.

**BASIS FOR
DECISION #6**

Buildings and asphalt cover most of the site. The area near the site is also mostly covered. Therefore, people will not contact subsurface soils. Drinking water in the area is supplied by the Orlando Utilities Commission. The water comes from deep Floridan Aquifer wells 1 mile northeast of the site, so it is not affected. There are no known private drinking water wells within a mile of the site.

DOH will consider review of new data by request.

**LIMITATIONS OF
FINDINGS**

All health risk assessments, to varying degrees, require the use of assumptions, judgments, and incomplete data. These contribute to the uncertainty of the final risk estimates. Some more important sources of uncertainty in this public health assessment include environment sampling and analysis, exposure parameter estimates, use of modeled (average) data, and present toxicological knowledge. We may overestimate or underestimate risk because of these uncertainties. This public health assessment does not represent an absolute estimate of risk to persons exposed to chemicals at or near the Orlando Gasification site.

**FOR MORE
INFORMATION**

If you have concerns about your health or the health of your children, you should contact your health care provider. You may also call the DOH toll-free at 877-798-2772 and ask for information about the former Orlando Gasification Plant hazardous waste site.

Background and Statement of Issues

The purpose of this public health assessment report is to assess the public health threat from toxic chemicals in groundwater, soil, and air at the former Orlando Gasification Plant hazardous waste site. The U.S. Environmental Protection Agency (EPA) requested this assessment. The former Orlando Gasification Plant site is in downtown Orlando, Florida, on the north and south sides of West Robinson Street (Figure 1).

The former Orlando Gasification Plant site is in a mixed commercial, industrial, and residential area. The site is currently split among several property owners and businesses including: Creative Packaging; Pierce; Clark; the Natasa-Murdinski-Clark Family Trust; Tampa Electric Company; and the City of Orlando (Figure 2). The site is bordered to the north by railroad tracks and the University of Central Florida's downtown campus. The site is bordered to the east by the more commercial properties including a Florida Department of Law Enforcement (FDLE) State Regional Service Center and a plumbing company. The site is bordered to the south by a residential area, including a church, a city park and single family homes. The site is bordered to the west by commercial buildings as well as multi-family and single family homes. There were no reports of other hazardous waste sites that would impact results in the immediate area.

Between 1887 and 1960, the site was an active manufactured gas plant (MGP). Initially the owners limited operations to the area north of West Robinson Street. In 1925, owners expanded the plant to include the area south of West Robinson Street. They brought in coal by the railroad to produce "water gas," which the City of Orlando used in lamps and stoves. Because of natural gas becoming available in 1959, the owners shut down and dismantled the MGP in 1960. The manufactured gas process created a number of by-products and contaminants often associated with petroleum. Some of the by-products released into the soil eventually migrated to the groundwater. Investigators detected several contaminants above regulatory limits including: metals, polycyclic aromatic hydrocarbons (PAHs) and volatile organic compounds (VOCs) which include benzene, toluene, ethylbenzene, and xylenes [EVIRON 2011].

In the early 1900s, the City of Orlando installed drainage wells to help prevent flooding during heavy rains. The City installed these wells to approximately 250 feet below ground surface (bgs) into the Upper Floridan Aquifer. It is thought that these drainage wells, some of which were in the immediate area of the site, contributed to the presence of site contaminants in the Upper Floridan Aquifer [ARCADIS 2009].

Five Upper Floridan Aquifer non-potable wells (four irrigation wells and one coolant well) were located within a mile of the site. Laboratory analysis detected some contaminants in three of the wells; however, the levels were below screening values for drinking water [ARCADIS 2009]. The report did not specify if the contamination found in these wells were site-related.

Area residents and businesses receive their drinking water from the Orlando Utilities Commission. The principle source of drinking water in the area is the Lower Floridan Aquifer, approximately 1,100 to 1,500 feet bgs. The Upper and Lower Floridan Aquifers are separated by an approximately 500 foot thick semi-confining unit, giving the Lower Floridan Aquifer protection from the migration of contaminants [Lichtler, 1968]. The nearest municipal well is located approximately 1 mile northeast of the site. This well is part of the Highland Avenue well field and is installed in the Lower Floridan Aquifer. The nearby public wells are tested quarterly and have not had detections of site-related contaminants. It appears that in the surficial and Upper Floridan zones, site-related groundwater contamination has stabilized or is declining [ARCADIS 2009].

The general direction of surficial groundwater flow in the area of the site is toward the north. In the Upper Florida Aquifer, groundwater flow is to the northeast in this area [ENVIRON 2011].

Soil and groundwater contamination, including light non-aqueous phase liquids (LNAPLs), exists beneath some on-site buildings. As a result, soil vapor intrusion is a potential source of indoor air contamination [ENVIRON 2011].

On July 8, 2013, the U.S. EPA hosted a community meeting for local residents and other interested parties to present the agency's proposed plans for cleanup at the Orlando Gasification Plant site. In September of 2013, EPA released a Record of Decision [EPA 2013c] that details the proposed cleanup plans. The selected remediation plan can be found in Appendix A.

Between September 20, 2016 and November 14, 2016, DOH solicited public comments for the draft version of this report. DOH's responses to public comments are in Appendix F of this report.

This assessment considers health concerns of nearby workers, residents, pedestrians and trespassers and explores possible associations with site-related contaminants. This assessment requires the use of assumptions, judgments, and incomplete data. These factors contribute to uncertainty in evaluating the health threat. Assumptions and judgments in this assessment err on the side of protecting public health and may overestimate the risk to public health.

Site Description

The former Orlando Gasification Plant site is a collection of seven parcels totaling approximately 4 acres between the 500 and 600 block of West Robinson Street. The parcels have six different owners. West Robinson Street and the right-of-way are owned by the City of Orlando. The Tampa Electric Company owns two parcels, both north and south of West Robinson Street. These parcels are made up of offices, parking, equipment storage, and a natural gas distribution station. Additional parcels include an FDLE vehicle storage area, a plastics company, and other commercial businesses. All of the

smaller properties have limited access and are enclosed by some form of fencing. Asphalt, concrete and buildings cover the vast majority of surface soil at the site.

On April 10, 2013, representatives from the DOH visited the site. The Department noted the right-of-way along West Robinson Street was the only unpaved and unrestricted part of the site. Buildings, pavement, or fences restrict access to the soil on all other parts of the site (Figure 3).

Demographics

DOH examines demographic and land use data to identify sensitive populations, such as young children, the elderly and women of childbearing age, to determine whether these sensitive populations are exposed to any potential health risks. Demographics also provide details on population mobility and residential history in a particular area. This information helps DOH evaluate how long residents might have been exposed to contaminants.

Approximately 13,415 people live within a 1.0-mile radius of the site. Forty-eight percent (48%) are white, 36% are African-American, 12% are of Hispanic origin, and 4% represent other racial or ethnic groups. Thirteen percent (13%) are less than 18 years old, and 87% are older than 18. Forty two percent (42%) have a high school diploma or less, and 58% have at least some college. Eighty five percent (85%) speak only English, and 62% make less than \$50,000 a year (EPA 2010).

Land Use

Land use north and east of the former Orlando Gasification Plant site is predominantly commercial and industrial. Land use south of the site is predominantly residential. Land use west of the site is predominantly residential with commercial business along parts of West Robinson Street.

Community Health Concerns

Residents of the neighborhood near the former Orlando Gasification Plant hazardous waste site are concerned about the health risk from contaminated drinking water; the site's potential contribution to asthma; and the health risk from dust, vapors and smells because of exposed subsurface soil and groundwater that may arise during future EPA remedial actions.

The Orlando Utilities Commission (OUC) provides drinking water for properties near the site. The closest well field to the site is approximately 1 mile northeast of the facility. The OUC has sampled these wells on a quarterly basis and has not detected site-specific contaminants of concern. In addition, EPA emphasized that all proposed cleanup plans would include procedures to protect public health during any cleanup at a July 8, 2013 public meeting.

Discussion

Environmental Data

Soil

Consultants collected on-site surface soils from beneath impervious material, such as asphalt, as well as from exposed soil.

Consultants collected 42 samples from exposed on-site and off-site surface soil [JWC 2002, BBL 2006, and ARCADIS 2009]. See Figures 4 and 5 for sample locations. They analyzed these samples for metals, PAHs, VOCs, and cyanide. Additionally, they analyzed three on-site surface-soil samples (SS-11, SS-12, and SS-14) for organic pesticide compounds. Laboratory analysis found most of the surface soil samples contaminated with arsenic and PAHs above screening guidelines (Table 5).

To evaluate on-site soil, consultants collected 12 on-site surface samples (SS-1 to SS-6, SS-8 and SS-10 to SS-14) from 0 to 6 inches for analysis (Table 5). Figure 4 shows the 12 sample locations. Consultants collected 11 residential surface samples (SS-29 to SS-39) from 0 to 6 inches for analysis of off-site surface soil (Table 7). Figure 4 shows the 11 sample locations. Consultants also collected seven commercial surface samples (SS-7, SS-9, SS-15, SS-16 and SS-40 to SS-42) from 0 to 6 inches for analysis of off-site surface soil along West Robinson Street and Chatham Avenue (Table 10). Figure 4 shows the seven sample locations.

Due to an initial laboratory result of 485 mg/kg of lead for the residential surface soil sample collected at location SS-37 on January 25, 2006, in September 2015 the City of Orlando retested location SS-37. Five surface soil samples were collected with results between 16 mg/kg and 75 mg/kg of lead. For this public health assessment, consultants for the EPA and responsible parties have adequately characterized surface-soil quality.

Soil Vapor

In January 2006, consultants for the EPA collected one ambient air and 12 soil vapor samples and analyzed for benzene, toluene, ethylbenzene, xylenes, naphthalene, and VOCs. They collected the samples from usually within 10 feet of the outside of the buildings [ARCADIS 2009].

In October 2010, consultants for the responsible party collected eight additional soil gas samples for benzene, toluene, ethylbenzene, xylenes, naphthalene, and VOCs analyses. They collected soil gas samples beneath (2 to 2.5 feet bgs) the slabs of three on-site buildings (A, B, and C) (Figure 6). Building B was demolished in 2016. Building A is an open-air structure and Building C is used for offices [ENVIRON 2011].

To determine the level at which vapors intrude into the buildings, consultants used radon as a tracer gas, although radon may act differently than the gases of concern. Technicians measured radon levels in the sub-slab soil gas and in the indoor air at the same location. Although EPA has determined vapor intrusion is not a likely current human health risk, this assessment considers it a “potential exposure pathway” because building foundations could possibly crack or become damaged during site remedial actions, building modifications, or changing utility lines allowing vapor intrusion.

Pathway Analyses

Chemical contamination in the environment can harm your health but only if you have contact with those contaminants (exposure). Without contact or exposure, there is no harm to health. If there is contact or exposure, how much of the contaminants you contact (concentration), how often you contact them (frequency), for how long you contact them (duration), and the danger level of the contaminant (toxicity) all determine the risk of harm.

Knowing or estimating the frequency with which people could have contact with hazardous substances is essential to assessing the public health importance of these contaminants. The method for assessing whether a health hazard exists to people is to determine whether there is a completed exposure pathway from a contaminant source to a receptor population and whether exposures to contamination are high enough to be of health concern.

An exposure pathway is a series of steps starting with the release of a contaminant in environmental media and ending at the interface with the human body. A completed exposure pathway consists of five elements:

1. A source of contamination like a hazardous waste site.
2. An environmental medium like air, water or soil that can hold or move the contamination.
3. A point where people contact a contaminated medium like water at the tap or soil in the yard.
4. An exposure route like ingesting (contaminated soil or water) or breathing (contaminated air).
5. A population who could be exposed to contamination like nearby residents.

Generally, the ATSDR/DOH consider three exposure categories: 1) completed exposure pathways; that is, all five elements of a pathway are present; 2) potential exposure pathways; that is, one or more of the elements may not be present, but information is insufficient to eliminate or exclude the element; and 3) eliminated exposure pathways; that is, a receptor population does not come into contact with contaminated media. Exposure pathways are used to evaluate specific ways in which people were, are, or will be exposed to environmental contamination in the past, present, and future.

Completed Exposure Pathway

For this assessment, DOH evaluated the long-term health threat from incidental ingestion (swallowing) of very small amounts of surface soil (0-6 inches deep). For this completed pathway, the former Orlando Gasification Plant hazardous waste site is the source. Activities involved in the manufacture and disposal of water gas and its by-products are thought to have caused contamination of on-site soil. Surface soil is the environmental medium. On-site surface soil is the exposure point. DOH also looked at surface soils: 1) off-site residential, 2) off-site commercial, adjacent to the site and along the railroad tracks and 3) off-site commercial, along West Robinson Street and Chatham Avenue near the site. Incidental ingestion, accidentally swallowing very small amounts of soil, is the exposure route. On-site workers, nearby residents, pedestrians and trespassers are the exposed population (Table 1).

Potential Exposure Pathway

For this assessment, DOH evaluates the long-term health threat from vapor intrusion into the air of on-site buildings. For this potential exposure pathway, the former Orlando Gasification Plant hazardous waste site is the source. Spills and improper disposal of by-products and waste material have contaminated the on-site soil and groundwater. Some of these contaminants may evaporate as vapors (the environmental medium) and possibly travel upward into buildings, making indoor air the possible point of human exposure. Breathing the air inside these buildings would be the exposure route. On-site workers would be the exposed populations (Table 2).

Eliminated Exposure Pathways

Incidental ingestion of sub-surface soil and drinking or showering with water from local private or municipal drinking water wells are eliminated exposure pathways (Table 3).

There is no evidence of exposure to sub-surface soils at or near the site. Cement, asphalt and buildings cover most of on-site sub-surface soil and access is restricted to those areas not covered. There are currently no businesses conducting excavation or other activities that might regularly expose people to subsurface soil on or near the site.

Drinking and showering with water from nearby private or municipal wells are also eliminated exposure pathways. There are no drinking water wells within a mile of the site. The closest drinking water well is a municipal supply well over a mile northeast of the site. Although contaminated ground water from the site stretches about a mile to the northeast, it's confined to the Upper Floridan aquifer. The municipal supply well to the northeast is in the Lower Floridan aquifer, is tested quarterly, and has not been impacted. The area of ground water contamination has stabilized and it not spreading. If the municipal supply well does become contaminated, they will cease its use, reduce its use, and/or mix its output with that of other wells to meet drinking water standards.

Identifying Contaminants of Concern

DOH compares the maximum concentrations of contaminants found at a site to ATSDR and other comparison values. Comparison values are specific for the medium contaminated (soil, water, air, etc.). DOH screens the environmental data using these comparison values:

- ATSDR Cancer Risk Evaluation Guide (CREG)
- ATSDR Environmental Media Evaluation Guides (EMEGs)
- ATSDR Reference Media Evaluation Guides (RMEGs)
- ATSDR Minimal Risk Level (MRL)
- Florida DEP Soil Cleanup Target Levels (SCTLs)
- EPA Maximum Contaminant Levels (MCLs)
- EPA Lifetime Health Advisory (LTHA)
- EPA Reference Concentration for Chronic Inhalation Exposure (RfC)
- Other guidelines

DOH selects for further evaluation contaminants with maximum concentrations above a comparison value. Comparison values, however, are not thresholds of toxicity. DOH and ATSDR do not use them to predict health effects or to establish clean-up levels. A concentration above a comparison value does not necessarily mean harm will occur. It does indicate, however, the need for further evaluation.

Maximum contaminant concentrations below comparison values are not likely to cause illness, and DOH/ATSDR does not evaluate them further.

By comparing the highest measured concentrations in soil and indoor air to ATSDR and EPA screening guidelines, DOH selected arsenic, benzo(a)pyrene toxic equivalents (BaP TEQ) as a measurement for PAHs, polychlorinated biphenyls (PCBs) -1260, and lead as contaminants of concern (COCs). DOH will reconsider COCs for indoor air if additional testing is conducted.

Arsenic

Arsenic is a naturally-occurring metal widely distributed in soil. Scientists usually find it combined with oxygen, chlorine, and sulfur. Most arsenic compounds have no smell or special taste [ATSDR 2007].

Arsenic, like most metals, is not well absorbed through the skin. If you get arsenic-contaminated soil on your skin, only a small amount will go through your skin into your body, so skin contact is usually not a health risk [ATSDR 2007]. The lack of air monitoring data prevents an evaluation of the risk from breathing arsenic-contaminated dust.

State and federal environmental agencies base their arsenic cleanup standards on workplace studies and laboratory animal studies. Because of uncertainties in these studies, their cleanup standards include large safety factors to ensure public health. Although concentrations slightly above these cleanup standards may not necessarily cause harm, the responsible party should clean up the soil to protect public health.

Dibenz(a,h)anthracene (DBA)

DBA is a polycyclic aromatic hydrocarbon (PAH). No commercial production or use of DBA is known. It occurs as a component of coal tars, shale oils, and soot and has been detected in gasoline engine exhaust, coke oven emissions, cigarette smoke, charcoal broiled meats, vegetation near heavily traveled roads, and surface water and soils near hazardous waste sites [RAIS 1997].

No human studies were available to evaluate the toxicity of DBA. In animals, depressed immune responses were observed in mice following single or multiple injections of DBA. No epidemiologic studies or case reports addressing the carcinogenicity of DBA in humans were available. In animals, DBA has produced tumors by different routes of administration, having both local and systemic carcinogenic effects.

Lead

Lead is a naturally-occurring bluish-gray metal found in small amounts in the soil. Lead can be found in all parts of our environment. Much of it comes from human activities including burning fossil fuels, mining, and manufacturing. Because of health concerns, lead from paints, ceramic products, caulking, and pipe solder has been dramatically reduced in recent years. In 1996 the government banned the use of lead as an additive to gasoline in the United States.

Adults and children may be exposed to lead by hand-to-mouth contact after exposure to lead-containing soil or dust. Most exposure to lead comes from accidental ingestion rather than dermal exposure. Environmental exposure to lead has long been recognized as a public health problem particularly among children. Excessive concentrations of lead in soil have been shown to increase blood lead levels in young children [ATSDR 2007b].

Lead, like most metals, is not well absorbed through the skin. Soil that contains lead may get on your skin, but only a small portion of the lead will pass through your skin and enter your blood. The only kinds of lead compounds that easily penetrate the skin are the additives in leaded gasoline, which is no longer sold to the public. Therefore, the public is not likely to encounter lead that can enter through the skin [ATSDR 2007b]. The lack of air monitoring data prevents an evaluation of the risk from breathing lead-contaminated dust.

Exposure to lead can happen from breathing workplace air or dust, eating contaminated foods, or drinking contaminated water. Children can be exposed from eating lead-based

paint chips or playing in contaminated soil. Lead can damage the nervous system, kidneys, and reproductive system. Signs and symptoms associated with lead toxicity include decreased learning capacity and memory, lowered Intelligence Quotient (IQ), speech and hearing impairments, fatigue and lethargy.

Protecting children from exposure to lead is important to lifelong good health. *No safe blood lead level in children has been identified. Even low levels of lead in blood have been shown to affect IQ, ability to pay attention, and academic achievement.* And effects of lead exposure cannot be corrected. The goal is to prevent lead exposure to children before they are harmed. There are many ways parents can reduce a child's exposure to lead. The most important is stopping children from coming into contact with lead [CDC 2012].

DOH uses the results from a mathematical model known as EPA's Integrated Exposure Uptake Biokinetic (IEUBK) model to estimate the possible blood lead levels of children who are exposed daily to surface soil in residential settings [EPA 2013]. A limitation of the IEUBK model is that the model was designed to evaluate relatively stable exposure situations, rather than rapidly varying exposures or exposure occurring for less than a year which are more common for workers, trespassers and pedestrians. The IEUBK model was also not developed to assess lead risks for age groups older than 7 years. The model does not take into account the soil cover (e.g., vegetation) and whether there is limited contact with the bare soil.

The U.S. DHHS has determined that lead is reasonably anticipated to be a human carcinogen based on limited evidence from studies in humans and sufficient evidence from animal studies. EPA has determined that lead is a probable human carcinogen. The IARC has determined that inorganic lead is probably carcinogenic to humans [ATSDR 2007b].

EPA has not established a cancer slope factor for lead with which to quantify an increased cancer risk. Therefore, DOH was unable to calculate a lifetime excess cancer risk for lead exposure.

Polycyclic Aromatic Hydrocarbons (PAHs)

PAHs are a group of over 100 different chemicals that are formed during the incomplete burning of coal, oil and gas, garbage, or other organic substances like tobacco or charbroiled meat. PAHs are usually found as a mixture containing two or more of these compounds, such as soot.

PAHs detected in soils at the site include anthracene, benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, benzo(g,h,i)perylene, benzo(a)pyrene, chrysene, dibenzo(a,h)anthracene, fluoranthene, fluorene, indeno(1,2,3-c,d)pyrene, phenanthrene and pyrene. To evaluate toxicity, ATSDR relates the toxicities of the carcinogenic PAH family members to the toxicity of BaP. They estimate carcinogenic

activity relative to BaP as the potency equivalency factor, or PEF [OEHHA 1993]. PEFs are found in Appendix D. To determine the PAH toxicity equivalent (TEQ), concentrations of carcinogenic PAHs other than BaP are multiplied by their respective PEF and then added to the concentration of BaP. ATSDR considers the PAH TEQ concentration the most valid measure of cancer-producing potency of a complex mixture of PAH compounds.

Animal studies have shown that PAHs can cause harmful effects on the skin, body fluids, and ability to fight disease after both short- and long-term exposure. But these effects have not been seen in people. The Department of Health and Human Services (DHHS) has determined that some PAHs may reasonably be expected to be carcinogens [ATSDR 1995]. Because health scientists believe PAHs may cause cancer through a mutagenic mode, ATSDR and DOH use age-dependent adjustment factors to estimate the increased cancer risk.

Polychlorinated Biphenyls (PCBs)

PCBs are a mixture of individual chemicals which are no longer produced in the United States, but are still found in the environment. PCBs have been used as coolants and lubricants in transformers, capacitors, and other electrical equipment because they do not burn easily and are good insulators. PCBs have no known smell or taste. Many commercial PCB mixtures are known in the U.S. by the trade name Aroclor.

Health effects that have been associated with exposure to PCBs include acne-like skin conditions in adults and neurobehavioral and immunological changes in children. The DHHS has concluded that PCBs may reasonably be anticipated to be carcinogens. The EPA and the International Agency for Research on Cancer (IARC) have determined that PCBs are probably carcinogenic to humans [ATSDR 2000].

Public Health Implications

Health scientists look at what chemicals are present and in what amounts. They compare those amounts to health guidelines. These guidelines are set far below known or suspected levels associated with health effects. DOH uses guidelines developed to protect children. If chemicals are not present at levels high enough to harm children, they would not likely harm adults.

This public health assessment also considers health concerns of nearby residents and explores possible associations with site-related contaminants. This assessment requires the use of assumptions and judgments, and relies on incomplete data. These factors contribute to uncertainty in evaluating the health threat. Assumptions and judgments in the assessment of the site's impact on public health err on the side of protecting public health and may overestimate the risk.

DOH estimates the health risk for individuals exposed to the highest measured level of contamination. DOH provides site-specific public health recommendations on the basis of toxicological literature, levels of environmental contaminants, evaluation of potential exposure pathways, duration of exposure, and characteristics of the exposed population. Whether a person will be harmed depends on the type and amount of contaminant, how they are exposed, how long they are exposed, how much contaminant is absorbed, genetics, and individual lifestyles.

After identifying contaminants of concern, DOH evaluates exposures by estimating daily doses for children and adults. Kamrin [1988] explains the concept of dose as follows:

“...all chemicals, no matter what their characteristics, are toxic in large enough quantities. Thus, the amount of a chemical a person is exposed to is crucial in deciding the extent of toxicity that will occur. In attempting to place an exact number on the amount of a particular compound that is harmful, scientists recognize they must consider the size of an organism. It is unlikely, for example, that the same amount of a particular chemical that will cause toxic effects in a 1-pound rat will also cause toxicity in a 1-ton elephant.

Thus instead of using the amount that is administered or to which an organism is exposed, it is more realistic to use the amount per weight of the organism. Thus, 1 ounce administered to a 1-pound rat is equivalent to 2,000 ounces to a 2,000-pound (1-ton) elephant. In each case, the amount per weight is the same; 1 ounce for each pound of animal.”

This amount per weight is the *dose*. Toxicology uses dose to compare toxicity of different chemicals in different animals. DOH uses the units of milligrams (mg) of contaminant per kilogram (kg) of body weight per day (mg/kg/day) to express doses in this assessment. A milligram is 1/1,000 of a gram (3-4 grains of rice weigh approximately 100 mg); a kilogram is approximately 2 pounds.

To calculate the daily doses of each contaminant, the DOH uses standard factors for dose calculation [ATSDR 2005; EPA 1997]. DOH assumes that people are exposed daily to the maximum concentration measured and makes the health protective assumption that 100% of the ingested chemical is absorbed into the body. The percent actually absorbed into the body is likely less.

Noncarcinogens - For an assessment of the noncancer health risk, DOH and ATSDR use the following formula to estimate a dose:

$$D = (C \times IR \times EF \times CF) / BW$$

D = exposure dose (milligrams per kilogram per day or mg/kg/day)

C = contaminant concentration (milligrams per kilogram or mg/kg)

IR = intake rate of contaminated sediment (milligrams per day or mg/day)

EF = exposure factor (unitless)

CF = conversion factor (10^{-6} kilograms per milligram or kg/mg)
BW = body weight (kilograms or kg)

$$EF = F \times ED / AT$$

EF = exposure factor (unitless)
F = frequency of exposure (days/year)
ED = exposure duration (years)
AT = averaging time (days) (ED x 365 days/year for noncarcinogens; 70 years x 365 days/year for carcinogens)

ATSDR groups health effects by duration of exposure. Acute exposures are those with duration of 14 days or less; intermediate exposures are those with duration of 15 – 364 days; and chronic exposures are those that occur for 365 days or more (or an equivalent period for animal exposures). ATSDR Toxicological Profiles also provide information on the environmental transport and regulatory status of contaminants.

DOH compares contaminant air concentrations directly to air comparison values and other doses reported in the toxicological literature for inhalation exposures. Children's doses are generally higher than adults are because their ingestion rates of soil and water, and inhalation of air compared with their low body weights exceed those of adults. Therefore, if children are not at risk, then adults are not either. For non-cancer illnesses, DOH first estimates the health risk by comparing the exposure dose for children to chemical-specific minimal risk levels (MRLs).

MRLs are health guidelines that establish exposure levels many times lower than levels where scientists observed no effects in animals or human studies. ATSDR designed the MRL to protect the most sensitive, vulnerable individuals in a population. The MRL is an exposure level below which non-cancerous harmful effects are unlikely, even after daily exposure over a lifetime. Although ATSDR considers concentrations at or below the relevant comparison value reasonably safe, exceeding a comparison value does not imply adverse health effects are likely. If contaminant doses/concentrations are above comparison values, DOH further analyzes exposure variables (for example, duration and frequency), toxicology of the contaminants, past epidemiology studies, and the weight of evidence for health effects. DOH uses chronic MRLs where possible because exposures are usually longer than a year. If chronic MRLs are not available DOH uses intermediate length MRLs [ATSDR 2005].

DOH and ATSDR use the following equation to estimate increased cancer risk:

$$\text{Risk} = D \times SF$$

Risk = Cancer risk
D = Age specific non-cancer dose (mg/kg/day)
SF = Slope factor (mg/kg-day)⁻¹

If the chemical is known to increase cancer risks due to early life exposure, DOH and ATSDR use the following equation to estimate increased cancer risk:

$$\text{Risk} = D \times SF \times ADAF$$

D = Age specific exposure dose (mg/kg/day)

SF = Slope factor (mg/kg-day)⁻¹

ADAF = Age Dependent Adjustment Factor

This is a conservative estimate of the increased cancer risk. The actual increased cancer risk is likely lower. Because of large uncertainties in the way scientists estimate cancer risks, the actual cancer may be as low as zero. Cancer risk is usually estimated for lifetime (78 years) exposure. Studies of animals exposed over their entire lifetime are the basis for calculating cancer slope factors. Usually, researchers know little about the cancer risk in animals from less than lifetime exposures. Therefore, we also use lifetime exposure to estimate the cancer risk in people. If there is no cancer slope (potency) factor, DOH/ATSDR cannot quantify the risk.

For noncancer illnesses, DOH first estimates the health risk for children. Because children are smaller and swallow more soil than adults, their exposure is higher. Therefore, if children are not at risk, then adults are not either.

Non-Cancer & Cancer Health Effects, Health Evaluation

Soil

This assessment only addresses surface soil sample data from 0 to 6 inches bgs and does not include samples taken from 0 to 24 inches bgs. Considering soil samples 0 to 24 inches bgs may underestimate the true concentration of water-insoluble contaminants deposited on and likely to remain at the ground surface where individuals are most likely to contact them.

Because people are not exposed to soil beneath impervious material, DOH evaluated only those samples from exposed soil in this assessment.

On-Site Surface Soil – Worker Exposure

DOH calculations used a soil intake of 100 mg/day, adult worker (outdoor with low soil contact) weighing 80 kg (approximately 176 lb), exposed 5 times per week with an exposure duration of 25 years.

Arsenic

DOH estimated exposure using a maximum on-site soil concentration for arsenic of 25 mg/kg and a relative bioavailability factor of 60% [EPA 2015b].

Noncancer illnesses

A maintenance worker who incidentally ingests very small amounts of surface soil from the site with the highest arsenic levels is unlikely to develop noncancer illnesses. The maximum worker arsenic dose (1.9×10^{-5} mg/kg/day) is less than ATSDR's chronic MRL (3×10^{-4} mg/kg/day) and thus unlikely to cause noncancer illnesses (Table 6).

Cancer risk

Workers who incidentally ingest surface soil with the highest arsenic levels at the site over a 25-year period are at an “extremely low” increased estimated risk of cancer (Table 6). Multiplying the maximum arsenic dose (4.3×10^{-6} mg/kg/day) by the EPA cancer slope factor ($1.5 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 6.4 in a million (0.0000064 or 6.4×10^{-6}).

To put this into context, the American Cancer Society estimates that one out of every three Americans (or 333,333 in 1,000,000) will be diagnosed with some form of cancer in their lifetime. Adding the estimated increased cancer risk from exposure to arsenic in the surface soil at the Orlando Gasification Plant hazardous waste site would increase the cancer incidence from 333,333 in 1,000,000 to 333,339 in 1,000,000.

DBA

DOH estimated exposure using a maximum on-site soil concentration for DBA of 1.1 mg/kg and 25-year exposure duration. Calculations also used a soil intake of 100 mg/day and an 80 kg (approximately 176 lb) adult worker exposed 5 times per week.

Noncancer illnesses

DOH estimated exposure using the maximum commercial soil concentration for DBA. DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. A maintenance worker who incidentally ingests very small amounts of surface soil with the highest DBA levels is unlikely to develop noncancer illnesses. Health guidelines were not available for dose comparison.

Cancer risk

Workers who incidentally ingest (swallow very small amounts of) surface soil with the highest DBA levels at the site over a 25-year period are at an “extremely low” increased estimated risk of cancer (Table 6). Multiplying the maximum DBA cancer dose (6.2×10^{-8} mg/kg/day) by the EPA cancer slope factor ($7.3 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 4.5 in 10,000,000 (4.5×10^{-7}).

Lead

Lead was detected in on-site surface soil samples ranging from 16 to 80 mg/kg with an average concentration of 58 mg/kg [EPA 2016]. ATSDR concludes that exposure to these concentrations of lead in soil are unlikely to contribute significantly to the overall blood lead level of workers. The concentrations of lead in soil in this area are low and worker's exposures are expected to be minimal.

PAHs

DOH estimated exposure using a maximum on-site soil concentration for PAHs as measured as a BaP TEQ of 29.54 mg/kg and 25-year exposure duration. Calculations also used a soil intake of 100 mg/day and an 80 kg (approximately 176 lb) adult worker exposed 5 times per week.

Noncancer illnesses

DOH estimated exposure using the maximum commercial soil concentration for each of the noncarcinogenic PAHs (1-methylnaphthalene, 2-methylnaphthalene, acenaphthene, anthracene, fluoranthene, fluorine, naphthalene, and pyrene). DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. A maintenance worker who incidentally ingests very small amounts of surface soil with the highest noncarcinogenic PAH levels is unlikely to develop noncancer illnesses. DOH did not calculate doses for the noncarcinogenic PAHs since all maximum concentrations were below the EPA noncarcinogenic screening levels.

Cancer risk

Workers who incidentally ingest (swallow very small amounts of) surface soil with the highest BaP TEQ levels at the site over a 25-year period are at a "low" increased estimated risk of cancer (Table 6). Multiplying the maximum BaP TEQ dose (8.5×10^{-6} mg/kg/day) by the EPA cancer slope factor ($7.3 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 6.2 in 100,000 (6.2×10^{-5}).

PCBs

DOH estimated exposure using a maximum on-site soil concentration for PCB-1260 of 0.24 mg/kg and 25-year exposure duration. Calculations also used a soil intake of 100 mg/day and an 80 kg (approximately 176 lb) adult worker exposed 5 times per week.

Noncancer illnesses

A maintenance worker who incidentally ingests very small amounts of surface soil from the site with the highest PCBs levels is unlikely to develop noncancer illnesses. The maximum adult PCBs dose (2.1×10^{-7} mg/kg/day) is less than ATSDR's chronic MRL (2×10^{-2} mg/kg/day) and thus unlikely to cause noncancer illnesses (Table 6).

Cancer risk

Workers who incidentally ingest surface soil with the highest PCBs levels at the Orlando Gasification Plant site over a 25-year period are at an “extremely low” increased estimated risk of cancer (Table 6). Multiplying the maximum PCB-1260 dose (2.1×10^{-7} mg/kg/day) by the EPA cancer slope factor ($0.04 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of approximately 3 in a billion (0.0000000027 or 2.7×10^{-9}).

Off-Site Surface Soil – Residential Exposure

DOH estimated exposure using a soil intake of 100 mg/day and an 80 kg (approximately 176 lbs) body weight for adults. DOH used 33 years, the 95th percentile for current residence time, for the cancer risk exposure period. DOH took into account the mutagenic effects of DBA and PAHs for children 6 weeks to 16 years of age when estimating the cancer risks for residential exposure. Exposure risks were calculated using the maximum concentration for each contaminant above the screening level. Maximum exposure risks were low to extremely low (10^{-5} to 10^{-6}). Combined cancer risks for residential parcels would also be considered low to extremely low.

Arsenic

For non-cancer illness, DOH estimated exposure using a maximum residential surface soil concentration of 13 mg/kg and 1-year exposure duration for children 1 to 2 years old. For cancer risk, DOH estimated an increased cancer risk calculation for the 95th percentile for current residence time (33 years) over a lifetime exposure (78 years). DOH used a relative bioavailability factor of 60% of the maximum concentration in the dose and risk calculations for arsenic [EPA 2015].

Noncancer illnesses

A child who incidentally ingests very small amounts of residential surface soil with the highest arsenic levels is unlikely to develop noncancer illnesses. The estimated maximum arsenic dose for a child 1 to 2 years old (1.4×10^{-4} mg/kg/day) is less than ATSDR’s chronic MRL (3×10^{-4} mg/kg/day) and thus unlikely to cause noncancer illnesses (Table 8). DOH used the 1-to-2 years old period since this is normally the age range when children ingest the largest amount of soil.

Cancer risk

A person who incidentally ingests very small amounts of residential surface soil with the highest arsenic levels near the site over 33 years is at a “very low” increased estimated risk of cancer (Table 8). Multiplying the maximum arsenic dose for 33 years of exposure (4.1×10^{-6} mg/kg/day) by the EPA cancer slope factor ($1.5 \text{ mg/kg/day}^{-1}$) results in an estimated increased cancer risk of approximately 3 in million (3.1×10^{-6}).

To put this into context, the American Cancer Society estimates that one out of every three Americans (or 333,333 in 1,000,000) will be diagnosed with some form of cancer in their lifetime. Adding the estimated increased cancer risk from exposure to arsenic in the

surface soil at the Orlando Gasification Plant hazardous waste site would increase the cancer incidence from 333,333 in 1,000,000 to 333,336 in 1,000,000.

DBA

DOH estimated exposure using a maximum residential off-site soil concentration for DBA of 0.51 mg/kg. DOH used 33 years, the 95th percentile for current residence time, for the cancer risk exposure period. DOH took into account the mutagenic effects of DBA for children 6 weeks to 16 years of age when estimating the cancer risks for residential exposure.

Noncancer illnesses

DOH estimated exposure using the maximum commercial soil concentration for DBA. DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. A resident who incidentally ingests very small amounts of surface soil with the highest DBA levels is unlikely to develop noncancer illnesses. DOH did not calculate risk for the noncarcinogenic PAHs since all maximum concentrations were below the EPA noncarcinogenic screening levels.

Cancer risk

Residents who incidentally ingest (swallow very small amounts of) surface soil with the highest DBA levels at the site over a 33-year period are at a “very low” increased estimated risk of cancer (Table 8). Multiplying the maximum DBA cancer dose (1.3×10^{-7} mg/kg/day) by the EPA cancer slope factor ($7.3 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 1.4 in 100,000 (1.4×10^{-5}).

Lead

Lead in residential surface soil was detected at a range of 25 to 485 mg/kg. The maximum detected concentration of lead from the 2006 sampling of 485 mg/kg (location SS-37) was resampled in September 2015 by the City of Orland. The results of these five surface soil samples ranged from 16 mg/kg to 75 mg/kg which is much lower than previously measured. After the resample the maximum concentration for lead was 162 mg/kg at sample location SS-33 (see Figure 4).

The blood lead exposure model (IEUBK) predicts that exposure to lead in residential soil is not expected to significantly contribute to the overall blood lead level of children above the current CDC reference level of $5 \mu\text{g/dL}$ ¹ for all measured soil concentrations with the exception of the 2006 sample taken at location SS-37 (475 mg/kg) which was later resampled and found to have much lower levels of lead in soil (Table 9). As there is no safe blood lead level for children, any childhood exposures to lead should always be

¹ The reference level is based on the highest 2.5% of the U.S. population of children ages 1-5 years. That level is currently $5 \mu\text{g/dL}$ and based on the 2009-2010 National Health and Nutrition Examination Survey (NHANES). The current (2011-2012) geometric mean level for that age group is $0.97 \mu\text{g/dL}$. CDC will periodically update the reference level.

reduced or prevented [CDC 2012]. Resources on the prevention of childhood lead poisoning and ways to protect your family's health are provided in Appendix E.

PAHs

For noncancer illness, DOH estimated exposure using a maximum soil concentration for each of the noncarcinogenic PAHs as screening values. For cancer risk, DOH used the maximum BaP TEQ of 0.69 mg/kg to estimate an increased cancer risk calculation for the 95th percentile for current residence time (33 years) over a lifetime exposure (78 years). DOH took into account the mutagenic effects of PAHs for children 6 weeks to 16 years of age when estimating the cancer risks for residential exposure.

Noncancer illnesses

DOH estimated exposure using the maximum commercial soil concentration for each of the noncarcinogenic PAHs (1-methylnaphthalene, 2-methylnaphthalene, acenaphthene, anthracene, fluoranthene, fluorine, naphthalene, and pyrene). DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. A resident who incidentally ingests very small amounts of surface soil with the highest noncarcinogenic PAH levels over a lifetime is unlikely to develop noncancer illnesses. DOH did not calculate risk for the noncarcinogenic PAHs since all maximum concentrations were below the EPA noncarcinogenic screening levels.

Cancer risk

Residents who incidentally ingest surface soil with the highest BaP TEQ levels of 0.69 mg/kg at the site over 33 years are at a “very low” increased estimated risk of cancer (Table 8). Multiplying the maximum BaP TEQ dose (1.8×10^{-7} mg/kg/day) by the EPA cancer slope factor ($7.3 \text{ mg/kg/day}^{-1}$) along with age dependent adjustment factors (ADAFs) results in an increased estimated cancer risk of 2 in 100,000 (2.0×10^{-5}). A child who incidentally ingests very small amounts of residential surface soil with the highest BaP TEQ levels is unlikely to develop cancer-related illnesses. The estimated BaP TEQ dose for a child 1 to 2 years old (6.1×10^{-6} mg/kg/day) is well below the oral no-observed-adverse-effect levels (NOAELs) for PAHs of 1.3 mg/kg/day. ATSDR has not established an MRL for total PAHs. DOH used the 1-to-2 years old period to estimate soil ingestion since this is normally the period when children ingest the largest amount of soil.

PCBs

PCBs were not found above the detection levels in residential surface soil near the site. Therefore, PCBs are not considered a health risk in off-site residential soil.

Off-Site Surface Soil (along West Robinson Street and Chatham Avenue) – Pedestrian Exposure

DOH calculations used a soil intake of 100 mg/day and an 80 kg (approximately 176 lbs) pedestrian exposed four times per week with an exposure duration of 20 years.

Arsenic

DOH estimated exposure using a maximum soil concentration for arsenic of 1.2 mg/kg and a relative bioavailability factor of 60% [EPA 2015].

Noncancer illnesses

A pedestrian who incidentally ingests very small amounts of surface soil along West Robinson Street and Chatham Avenue near the Orlando Gasification Plant site with the highest arsenic levels is unlikely to develop noncancer illnesses. The estimated annual arsenic dose (5.2×10^{-7} mg/kg/day) for a pedestrian is less than ATSDR's chronic MRL (3×10^{-4} mg/kg/day) and thus unlikely to cause noncancer illnesses (Table 11).

Cancer risk

Pedestrians who incidentally ingest surface soil with the highest arsenic levels from commercial soil along West Robinson Street and Chatham Avenue near the Orlando Gasification Plant site over a 20-year period are at an “extremely low” increased estimated risk of cancer (Table 11). Multiplying the maximum arsenic dose (1.3×10^{-7} mg/kg/day) by the EPA cancer slope factor ($1.5 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 2 in 10 million (0.0000002 or 2×10^{-7}).

To put this into context, the American Cancer Society estimates that one out of every three Americans (or 3,333,333 in 10,000,000) will be diagnosed with some form of cancer in their lifetime. Adding the estimated increased cancer risk from exposure to arsenic in the surface soil at the Orlando Gasification Plant hazardous waste site would increase the cancer incidence from 3,333,333 in 10,000,000 to approximately 3,333,335 in 10,000,000.

DBA

DOH estimated exposure using a maximum commercial soil concentration for DBA of 0.37 mg/kg and 20-year exposure duration. Calculations also used a soil intake of 100 mg/day and an 80 kg (approximately 176 lbs) pedestrian exposed four times per week.

Noncancer illnesses

DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. A pedestrian who incidentally ingests very small amounts of surface soil along West Robinson and Chatham Avenue near the site with the highest noncarcinogenic DBA levels is unlikely to develop noncancer illnesses.

DOH did not calculate risk for the noncarcinogenic PAHs since all maximum concentrations were below the EPA noncarcinogenic screening levels.

Cancer risk

Pedestrians who incidentally ingest commercial surface soil with the highest DBA levels near the site over a 20-year period are at an “extremely low” increased estimated risk of cancer (Table 11). Multiplying the maximum DBA dose (6.8×10^{-8} mg/kg/day) by the EPA cancer slope factor ($7.3 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 4.9 in 10,000,000 (4.9×10^{-7}).

Lead

Lead was detected in commercial surface soil samples ranging from 11 to 110 mg/kg with an average concentration of 60 mg/kg [EPA 2016]. ATSDR concludes that exposure to these concentrations of lead in soil are unlikely to contribute significantly to the overall blood lead level of pedestrians. The concentrations of lead in soil in this area are low and pedestrian exposures are expected to be minimal.

PAHs

DOH estimated exposure using a maximum commercial soil concentration for PAHs as measured as a BaP TEQ of 2.5 mg/kg and 20-year exposure duration. Calculations also used a soil intake of 100 mg/day and an 80 kg (approximately 176 lbs) pedestrian exposed four times per week.

Noncancer illnesses

DOH estimated exposure using the maximum commercial soil concentration for each of the noncarcinogenic PAHs (1-methylnaphthalene, 2-methylnaphthalene, acenaphthene, anthracene, fluoranthene, fluorene, naphthalene, and pyrene). DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. A pedestrian who incidentally ingests very small amounts of surface soil along West Robinson and Chatham Avenue near the site with the highest noncarcinogenic PAH levels is unlikely to develop noncancer illnesses. DOH did not calculate risk for the noncarcinogenic PAHs since all maximum concentrations were below the EPA noncarcinogenic screening levels.

Cancer risk

Pedestrians who incidentally ingest commercial surface soil with the highest BaP TEQ levels near the site over a 20-year period are at an “extremely low” increased estimated risk of cancer (Table 11). Multiplying the maximum BaP TEQ dose (4.6×10^{-7} mg/kg/day) by the EPA cancer slope factor ($7.3 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 3.4 in 1,000,000 (3.4×10^{-6}).

PCBs

PCBs were not found above the detection levels in commercial soil along West Robinson Street and Chatham Avenue near the Orlando Gasification Plant site. Therefore, PCBs are not considered a health risk from these areas.

Off-Site Commercial Surface Soil (Along the Railroad Track Northeast and Northwest of the Site) – Trespasser Exposure

Consultants collected six surface samples (SS-17 to SS-22) from areas along the railroad tracks north of the site at 0 to 6 inches for analysis (Table 12). Figure 5 shows the six sample locations. These areas are almost completely fenced to the north and south of the railroad tracks and are posted with “No Trespassing” signs. Noncancer illness calculations used a soil intake of 100 mg/day and a 45 kg (approximately 100 lbs) area trespasser exposed four times per week with an exposure duration of 10 years.

Arsenic

DOH estimated exposure using a maximum soil concentration for arsenic of 39 mg/kg and a relative bioavailability factor of 60% [EPA 2015].

Noncancer illnesses

A trespasser who incidentally ingests very small amounts of surface soil from along the railroad track north of the site with the highest arsenic levels is unlikely to develop noncancer illnesses. The estimated annual arsenic dose (3.0×10^{-5} mg/kg/day) for a trespasser is less than ATSDR’s chronic MRL (3×10^{-4} mg/kg/day) and thus unlikely to cause noncancer illnesses (Table 13).

Cancer risk

A trespasser who incidentally ingest surface soil with the highest arsenic levels from along the railroad track over a 10-year period are at an “extremely low” increased estimated risk of cancer. Multiplying the maximum arsenic dose (1.1×10^{-6} mg/kg/day) by the EPA cancer slope factor ($1.5 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 8.1 in a million (0.0000081 or 8.1×10^{-6}).

DBA

DOH estimated exposure using the maximum commercial soil concentration for DBA. DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. Calculations also used a soil intake of 100 mg/day and a 45 kg (approximately 100 lbs) area trespasser exposed 4 times per week.

Noncancer illnesses

A trespasser who incidentally ingests very small amounts of surface soil with the highest noncarcinogenic PAH levels is unlikely to develop noncancer illnesses. DOH did not calculate risk for the noncarcinogenic PAHs since all maximum concentrations were below the EPA noncarcinogenic screening levels.

Cancer risk

A trespasser who incidentally ingests (swallow very small amounts of) surface soil with the highest DBA levels at the site over a 10-year period is at an “extremely low” increased estimated risk of cancer. Multiplying the maximum DBA cancer dose (1.1×10^{-6} mg/kg/day) by the EPA cancer slope factor ($7.3 \text{ mg/kg/day}^{-1}$) results in an increased estimated cancer risk of 8.1 in 1,000,000 (8.1×10^{-6}).

Lead

Lead was detected in on-site surface soil samples ranging from 230 to 1,200 mg/kg with an average concentration of 786 mg/kg [EPA 2016]. ATSDR concludes that exposure to average concentrations of lead in on-site are unlikely to contribute significantly to the overall blood lead level of trespassers. As this area is restricted and posted to prevent trespassing, exposure is expected to be very limited.

PAHs

DOH estimated exposure using the maximum commercial soil concentration for each of the noncarcinogenic PAHs (1-methylnaphthalene, 2-methylnaphthalene, acenaphthene, anthracene, fluoranthene, fluorene, naphthalene, and pyrene). DOH compared the maximum concentration against the EPA noncarcinogenic screening levels using a noncancer hazard index of 0.1. Calculations also used a soil intake of 100 mg/day and a 45 kg (approximately 100 lbs) area trespasser exposed 4 times per week.

Noncancer illnesses

A trespasser who incidentally ingests very small amounts of surface soil with the highest noncarcinogenic PAH levels is unlikely to develop noncancer illnesses. DOH did not calculate doses for the noncarcinogenic PAHs since all maximum concentrations were below the EPA noncarcinogenic screening levels.

PCBs

Laboratory analysis did not find PCBs above the detection levels in commercial surface soil along the railroad track north of the Orlando Gasification Plant site. Therefore, DOH does not consider PCBs to be a health risk from these areas.

On-Site Vapor Intrusion – Worker Exposure

Data analysis from January and October soil gas samples showed benzene, 1,3-butadiene, chloroform, and naphthalene above cancer-based soil gas screening levels. Chemicals above screening levels warrant further analysis. The soil gas concentrations were all less than 100 times the soil gas screening levels based on one in a million extra cancer risk.

Radon testing showed very low levels in the indoor air of Buildings A, B, and C (0.24 to 0.92 pCi/L) despite relatively high subslab gas concentrations (692 to 1880 pCi/L). The EPA action level for radon is 4 pCi/L. Therefore, the radon data do not support the presence of significant pathways from soil gas to indoor air at the site buildings². However, other pathways, such as sewer gas, generally cannot be ruled out without indoor air sampling.

The lines of evidence collected did not find that indoor air of current on-site buildings is impacted by subsurface contamination. However, data gaps make it impossible to determine. Summertime conditions and variability of soil gas under different regions the buildings are also unknown. Ongoing remediation and taking appropriate precautions during redevelopment will decrease the potential for health hazards. Exposures prior to data collection cannot be evaluated due to lack of past monitoring data.

The site remedial design is to remove, stabilize, and control migration of the contaminants onsite. Long-term groundwater monitoring is planned. DOH and ATSDR are available to review site safety and monitoring plans for remediation and redevelopment activities upon request.

Health Outcome Data

DOH epidemiologists did not evaluate area cancer rates for two reasons. First, the maximum estimated increased cancer risks for exposure to contaminants of concern in the surface soil on or near this site is “low” to “extremely low.” Second, in addition to the low to extremely low risk, exposure to surface soil is limited due to the restricted site access because of the site being fenced and mostly covered by structures, asphalt or cement.

² Naturally occurring radon may serve as a tracer to help identify those buildings that are more susceptible to soil gas entry than others. The radon concentration in a building is not generally expected to be a good quantitative indicator of indoor air exposure concentrations of vapor-forming chemicals arising from subsurface contamination. Hence, radon measurement is not generally recommended as a proxy for directly measuring vapor-forming chemicals in indoor air. ATSDR recommends concurrently collecting indoor air, sub-slab gas, and outdoor air to evaluate the full vapor intrusion pathway.

Child Health Considerations

In communities faced with air, water, or soil contamination, the many physical differences between children and adults demand special attention. Children could be at greater risk than adults from certain kinds of exposure to hazardous substances. Children play outdoors and sometime engage in hand-to-mouth behaviors that increase their exposure potential. Children are shorter than adults; this means they breathe dust, soil and vapors close to the ground. A child's lower body weight and higher intake rate results in a greater dose of hazardous substance per unit of body weight. If toxic exposure levels are high enough during critical growth stages, the developing body system of children can sustain permanent damage. Finally, children are dependent on adults for access to housing, for access to medical care, and for risk identification. Thus, adults need as much information as possible to make informed decisions regarding their children's health.

This assessment takes into account the special vulnerabilities of children. It specifically assesses the health risk for children playing in the surface soil of residential properties near the former Orlando Gasification Plant hazardous waste site. DOH found that children less than 4 years of age exposed to lead via incidental ingestion of surface soil at one sample location are more likely to encounter a level above the level of concern than adults.

Conclusions

DOH reached six conclusions regarding the Orlando Gasification Plant Site. DOH concludes:

1. DOH is not able to conclude whether chemicals are present in indoor air that may harm current or future on-site workers because indoor air data are not available.
2. Incidental ingestion of (swallowing) contaminants in on-site surface soil is not expected to harm workers' health.
3. Incidental ingestion of contamination in off-site surface soil at residences near the site is not expected to harm the health of residents.
4. Incidental ingestion of contaminants in off-site surface soil along West Robinson Street and Chatham Avenue is not expected to harm the health of pedestrians.
5. Incidental ingestion of contaminants in surface soil along the railroad track north of the site is not expected to harm trespassers' health.
6. Since people do not contact contaminants in groundwater or on-site or nearby subsurface soils, they will not harm people's health.

Recommendations

Florida DOH recommends

Indoor air sampling to evaluate exposures in buildings currently onsite. Florida DOH also recommends health protective measures and monitoring during cleanup. Vapor mitigation systems may be appropriate when designing and constructing new buildings on site properties. Establish operation, maintenance and monitoring plans for any new vapor mitigation systems.

Public Health Action Plan

Actions Completed

DOH:

- Shared the draft report with approximately 280 community members to address any additional health concerns in the final report. There were no health concerns expressed relating to the draft report.
- Solicited public comments on the draft report as well as collected any additional health concerns and addressed both in the final report.

Actions Planned

DOH will consider review of new data by request.

Report Preparation

This Public Health Assessment for the former Orlando Gasification Plant site was prepared by the DOH under a cooperative agreement with the federal Agency for Toxic Substances and Disease Registry (ATSDR). It is in accordance with the approved agency methods, policies, procedures existing at the date of publication. Editorial review was completed by the cooperative agreement partner. ATSDR has reviewed this document and concurs with its findings based on the information presented.

Author

Alan Willett, MS, Public Health Toxicology, Bureau of Epidemiology, Division of Disease Control and Health Protection, 850 245-4401

DOH Reviewers

Bureau of Epidemiology, Division of Disease Control and Health Protection:

- Randy Merchant, MS, Public Health Toxicology, 850-245-4401
- Kendra Goff, PhD, DABT, State Toxicologist, Public Health Toxicology Administrator, 850-245-4401
- Sharon Watkins, PhD, Bureau Chief

Anna Likos, MD, MPH, State Epidemiologist, Division Director, Division of Disease Control and Health Protection

Celeste Philip, MD, MPH, Deputy Secretary for Health, Deputy State Health Officer for CMS

ATSDR Reviewers

Division of Community Health Investigations

Audra Henry, MS, Technical Project Officer
Annmarie DePasquale, MPH, Central Branch Associate Director for Science
Trent LeCoulte, MS, Acting State Cooperative Agreement Team Lead
Tina Forrester, PhD, CIH, Acting Division Associate Director for Science
Ileana Arias, PhD, Division Director

References

[ARCADIS 2009] ARCADIS. Final Remedial Investigation Report, Orlando Gasification Site, Orlando, Florida. January 2009.

[ATSDR 1995] Agency for Toxic Substances and Disease Registry. Toxicological Profile for Polycyclic Aromatic Hydrocarbons (PAHs). Atlanta: U.S. Department of Health and Human Services; August 1995.

[ATSDR 2000] Agency for Toxic Substances and Disease Registry. Toxicological Profile for Polychlorinated Biphenyls (PCBs). Atlanta: U.S. Department of Health and Human Services; November 2000.

[ATSDR 2005] Agency for Toxic Substance and Disease Registry. Public Health Assessment Guidance Manual (Update). U.S. Department of Health and Human Services, Atlanta, GA. January 2005.

[ATSDR 2007] Agency for Toxic Substances and Disease Registry. Toxicological Profile for Arsenic (Update). Atlanta: U.S. Department of Health and Human Services; August 2007.

[ATSDR 2007b] Agency for Toxic Substances and Disease Registry. Toxicological Profile for Lead. Atlanta: U.S. Department of Health and Human Services; August 2007.

[ATSDR 2014] Agency for Toxic Substances and Disease Registry. 2014. Division of Community Health Investigations Exposure Dose Guidance for Soil and Sediment Ingestion. Atlanta: US Department of Health and Human Services, Public Health Service.

[BBL 2006] Previous Analytical Data, Orlando Gasification Site, EPA ID FLD 984 169 235.

[CDC 2012] Low Level Lead Exposure Harms Children: A Renewed Call for Primary Prevention. Report of the Advisory Committee on Childhood Lead Poisoning Prevention of the Centers for Disease Control and Prevention. January 4, 2012.
http://www.cdc.gov/nceh/lead/acclpp/final_document_030712.pdf

[Environ 2011] ENVIRON International Corporation. Human Health and Ecological Risk Assessment Orlando Gasification Site, Orlando, Florida. March 2011.

[EPA 1995] U.S. Environmental Protection Agency, Office of Research and Development. Exposure Factors Handbook. Volumes I, II, and III. EPA/600/ P-95/002F (a, b, and c).

[EPA 1997] U.S. Environmental Protection Agency, Office of Research and Development. Exposure Factors Handbook. Volumes I, II, and III. EPA/600/ P-95/002F (a, b, and c).

[EPA 2010] U.S. Environmental Protection Agency. Environmental Justice Geographic Assessment tool. Census 2010 data. Washington, DC. (Updated November 13, 2012; accessed November 13, 2012). Available from <http://epamap14.epa.gov/ejmap/entry.html>

[EPA 2012] U.S. Environmental Protection Agency. Regional Screening Level, Resident Air Supporting Table (Updated April, 2012). Available from www.epa.gov/reg3hwmd/risk/human/rb-concentration_table/Generic_Tables/index.htm

[EPA 2013] U.S. Environmental Protection Agency. Frequent Questions from Risk Assessors on the Integrated Exposure Uptake Biokinetic (IEUBK) Model www.epa.gov/superfund/lead/ieubkfaq.htm

[EPA 2013b] U.S. Environmental Protection Agency. Integrated Risk Information System (IRIS) www.epa.gov/IRIS/

[EPA 2013c] U.S. Environmental Protection Agency. Record of Decision (ROD), Summary of Remedial Alternative Selection, Orlando Former Gasification Plant, September 2013.
<http://www.epa.gov/region4/superfund/images/nplmedia/pdfs/orlandgasflrod09252013>

[EPA 2015a] U.S. Environmental Protection Agency Office of Solid Waste and Emergency Response. OWSER Technical Guide for Assessing and Mitigating the Vapor Intrusion Pathway from Subsurface Vapor Sources to Indoor Air. June 2015.

[EPA 2015b] Transmittal Memo from Becki Clark to the Regions, dated December 31, 2012 (PDF)
<http://www.epa.gov/superfund/bioavailability/pdfs/Transmittal%20Memo%20from%20Becki%20Clark%20to%20the%20Regions%2012-31-12.pdf>

[EPA 2016] U.S. Environmental Protection Agency. Pro-UCL version 5.1, release July 2016.

[JWC 2002] Expanded Site Investigation (ESI-2) Report, Orlando Former MGP Site, Jacques Whitford Company, September 2002.

[ITRC 2007] The Interstate Technology & Regulatory Council. Vapor Intrusion Pathway: A Practical Guideline. January 2007].

[Kamrin 1988] Toxicology – A Primer on Toxicology Principles and Applications. Lewis Publications. Chelsea MI. 1988.

[Lichtler 1968] Lichtler, W.F., et al., Florida State Board of Conservation. Water Resources of Orange County, Florida. Report of Investigation No. 50. Tallahassee, Florida. 1968.

[OEHHA 1993] Office of Environmental Health Hazard Assessment. Air Toxics Hot Spots Program: Guidance Manual for Preparation of Health Risk Assessments, Appendix G. http://www.oehha.ca.gov/air/hot_spots/hotspots2015.html

[RAIS 1997] The Risk Assessment Information System. Condensed Toxicity Summary for Dibenz(a,h)anthracene.
http://rais.ornl.gov/tox/profiles/dibenz_a_h_anthracene_c_V1.html

Appendices

Appendix A

Selected Information from EPA Record of Decision (ROD)

Summary of Remedial Alternative Selection

Orlando Former Gasification Plant

September 2013

Description of Selected Remedy

The primary components of the Selected Remedy include:

- Excavation and off-site disposal of surface soil containing Site-specific contaminants of concern at concentrations above the cleanup levels
- Excavation and off-site disposal of unsaturated soils in the area(s) along the northern and eastern boundaries of parcel 2 where mobile light non-aqueous phase liquid (LNAPL) was observed during the remedial investigation (RI)
- Implementation of in-situ stabilization and solidification (ISS) in the saturated zone where saturated and/or mobile dense non aqueous phase liquid (DNAPL) was observed in the area(s) along the northern m boundary of the parcel 3
- Removal and off-site disposal of former manufactured gas plant (MGP) structures such as the tar well and associated piping encountered during excavation activities
- Demolition of the building on parcel 2 and off-site disposal of building materials
- Installation of an engineered capping system over the footprint of the "source area" to minimize infiltration
- Backfilling of the excavated areas with clean backfill material and restoration of construction-impacted hardscape areas as needed
- Installation of an ISS wall along the perimeter of the highly impacted soil and groundwater areas also identified as "source area" (where residual MGP impacts were observed) and where groundwater concentrations are greater than or equal to FDEP natural attenuation default concentrations (NADCs)
- Implementation of a short-term groundwater monitoring program subsequent to the construction of the "source area" containment system to determine the extent of the areas within the dissolved groundwater plume where in-situ enhanced bioremediation (ISEB)/biosparging or MNA will be implemented. It is anticipated this groundwater monitoring program will be conducted over a period of approximately three years.
- Implementation of a long-term groundwater monitoring program to assess the effectiveness of the remedy.
- Implementation of institutional controls (ICs) such as restrictive covenants or land and groundwater use restrictions to ensure the effectiveness of the remedy.

Hydraulic control within the containment wall will be achieved by installing subsurface drain(s) inside the ISS wall. The hydraulic control system will be designed to allow for treatment of the contaminated groundwater that flow through the ISS wall via aeration,

activated carbon or other technologies as determined by the EPA. Sampling and monitoring of the treated groundwater will be required to ensure the effectiveness of the treatment technology. The total estimated cost of the Selected Remedy is \$18 million.

9.1.1 Institutional Controls (ICs)

The NCP states that institutional controls, while not actively cleaning up the contamination at the Site, can control exposure, and therefore, are considered to be limited action alternatives. The NCP preamble states: "Institutional controls will usually be used as supplementary protective measures during implementation of groundwater remedies."

Consistent with the RAOs developed for the Site, the specific performance objectives for the institutional controls (ICs) to be implemented at the Site are to prevent human exposure to soil, groundwater, and indoor air with contaminants above levels that pose unacceptable risk and do not allow for unrestricted exposure. EPA will use ICs also to maintain the integrity of the any existing or future monitoring or remediation system. The Potentially responsible parties (PRPs) will be responsible to maintain and monitor the ICs. The FDEP will primarily take responsibility to enforce the ICs according to the ROD. During the remedial design (RD), a Site Management Plan will be developed. This plan will provide the requirements to manage remaining soils that exceed RAOs after remedial construction has been completed. The plan will also provide the implementation and enforcement mechanisms of the identified ICs.

The following generally describes those ICs to be considered for implementation at the Site to achieve the performance objectives:

- Restrictive covenants will be executed by on-site property owners prohibiting the reuse of the properties for residential purposes unless prior written approval is obtained from EPA and FDEP.
- Installation of groundwater extraction wells and the use of groundwater within the contaminated groundwater plume will be prohibited (except for groundwater monitoring wells approved by EPA/FDEP).

9.9 Alternative 8 - Soil Excavation with Parcel 2 Building Removal, ISS Containment Wall, Engineered Cap, NAPL Stabilization and/or Excavation and Off-site Disposal, Biosparging (In-Situ enhanced bioremediation), MNA and ICs

Estimated Capital Cost: \$19.5 million

Estimated O&M Cost: \$1.6 million

Estimated Present Worth Cost: \$18 million

Estimated Time to Achieve RAOs and Cleanup Levels: 20 Years (outside ISS containment wall); > 30 Years (inside ISS containment wall)

Under Alternative 8, biosparging (in-situ enhanced bioremediation) and MNA would be implemented to address the dissolved groundwater plume. Subsequent to the implementation of the "source area" ISS containment wall, a short-term groundwater monitoring program would be developed and implemented. The results of this groundwater monitoring program would be used to determine the extent of the areas where biosparging or MNA would be implemented.

Based on the locations of historical MGP features at the facility and the presence of NAPL observed during the RI activities directly adjacent to the building on parcel 3, it is suspected that substantial saturated coal tar DNAPL may be present beneath the building. As a result, during the design phase, additional investigation would be conducted. If substantial DNAPL is observed during these investigations, the building would be demolished and the NAPL would be addressed as discussed above (excavation and/or ISS).

As discussed in Section 9.1, Site Management Plan, long-term groundwater monitoring, and ICs, would be implemented. In addition, Five-Year review would be conducted to ensure the effectiveness of the remedy. A conceptual layout of Alternative 8 is presented on Figure 14.

Appendix B

Tables

Table 1. Completed Human Exposure Pathway at the Orlando Gasification Plant Site

Completed Pathway Name	Completed Exposure Pathway Elements					Time
	Source	Environmental Media	Point of Exposure	Route of Exposure	Exposed Population	
Incidental ingestion (swallowing) of on-site soil	Orlando Gasification Plant	Exposed surface soil	On-site	Incidental ingestion	On-site workers	Past, present, and future
Incidental ingestion of off-site residential soil	Orlando Gasification Plant	Exposed surface soil	Off-site residential areas	Incidental ingestion	Nearby residents	Past, present, and future
Incidental ingestion of off-site commercial soil	Orlando Gasification Plant	Exposed surface soil	Off-site commercial areas south of site	Incidental ingestion	Pedestrians	Past, present, and future
Incidental ingestion of off-site commercial soil	Orlando Gasification Plant	Exposed surface soil	Off-site commercial areas north of the site along the RR tracks	Incidental ingestion	Trespassers	Past, present, and future

Table 2. Potential Human Exposure Pathways at the Orlando Gasification Plant Site

Completed Pathway Name	Completed Exposure Pathway Elements					Time
	Source	Environmental Media	Point of Exposure	Route of Exposure	Exposed Population	
Vapor intrusion into air of on-site buildings	Orlando Gasification Plant	Indoor air	Indoor air of on-site buildings	Inhalation	On-site workers	Future

Table 3. Eliminated Human Exposure Pathways at the Orlando Gasification Plant Site

Completed Pathway Name	Completed Exposure Pathway Elements				
	Source	Environmental Media	Point of Exposure	Route of Exposure	Exposed Population
On-site subsurface soil	Orlando Gasification Plant	Soil	None	Ingestion	None
Off-site subsurface soil	Orlando Gasification Plant	Soil	None	Ingestion	None
Drinking water from municipal water wells	Orlando Gasification Plant	Deep Groundwater	None	Ingestion	None
Showering with water from municipal water wells	Orlando Gasification Plant	Deep Groundwater	None	Inhalation	None

Table 4a. Building A⁽¹⁾ - Sub-slab Soil Gas Concentrations Above Screening Levels (adjusted 0.03 attenuation value) at the Orlando Gasification Plant Site - October, 2010

Contaminants	Sub-slab Soil Gas Concentration (µg/m ³)	Air Screening Level* (unadjusted) (µg/m ³)	Source of Air Screening Guideline	Air Screening Level* (adjusted) (µg/m ³)	# Above Screening Level*/Total #
1,2,4-Trimethylbenzene	36	7.3	EPA RSL	2.43E+02	0/1
1,3,5-Trimethylbenzene	16.5	7.3	EPA RSL	2.43E+02	0/1
2-Butanone (Methyl Ethyl Ketone)	11.5	5,000	Rfc	1.67E+05	0/1
2-Propanol	220	730	EPA RSL	2.43E+04	0/1
4-Ethyltoluene	20.5	NA	-	-	-
Acetone	117	31,000	cEMEG	1.03E+06	0/1
Benzene	70.5	0.13	CREG	4.33E+00	1/1
Bromodichloromethane	7.45	NA	-	-	-
Carbon Disulfide	12	930	cEMEG	3.10E+04	0/1
Chloroform	32	0.043	CREG	1.43E+00	1/1
Ethanol	12	NA	-	-	-
Ethyl Benzene	13.5	260	cEMEG	8.67E+03	0/1
Methylene Chloride	8.4	100	CREG	3.33E+03	0/1
Naphthalene	225	0.083	EPA RSL	2.77E+00	1/1
Styrene	13	850	cEMEG	2.83E+04	0/1
Tetrachloroethene	14	3.8	CREG	1.27E+02	0/1
Toluene	82	300	cEMEG	1.00E+04	0/1
Xylenes (total)	80	220	cEMEG	7.33E+03	0/1

Source of data: (ENVIRON 2011)

⁽¹⁾ = Building A (Figure 6)

CREG = ATSDR cancer risk evaluation guide

µg/m³ = micrograms per cubic meter

* Screening guidelines only used to select chemicals for further scrutiny, not to the judge the risk of illness.

NA = not available

cEMEG = ATSDR chronic environmental media evaluation guide

EPA RSL = Environmental Protection Agency Regional Screening Level (Residential Air)

Table 4b. Building B⁽¹⁾ - Sub-slab Soil Gas Concentrations Above Screening Levels (adjusted 0.03 attenuation value) at the Orlando Gasification Plant Site- October, 2010

Contaminants	Sub-slab Soil Gas Concentration (µg/m ³)	Air Screening Level* (unadjusted) (µg/m ³)	Source of Air Screening Guideline	Air Screening Level* (adjusted) (µg/m ³)	# Above Screening Level*/Total #
1,2,4-Trimethylbenzene	5.5	7.3	EPA RSL	2.43E+02	0/1
1,3-Butadiene	41	0.033	CREG	1.10E+00	1/1
2,2,4-Trimethylpentane	4.6	NA	-	-	-
2-Butanone (Methyl Ethyl Ketone)	34	5,000	Rfc	1.67E+05	0/1
2-Propanol	14	730	EPA RSL	2.43E+04	0/1
4-Ethyltoluene	6.9	NA	-	-	-
Acetone	89	31,000	cEMEG	1.03E+06	0/1
Benzene	33	0.13	CREG	4.33E+00	1/1
Carbon Disulfide	69	930	cEMEG	3.10E+04	0/1
Chloroform	22	0.043	CREG	1.43E+00	1/1
Cyclohexane	16	6000	Rfc	2.00E+05	0/1
Ethanol	60	NA	-	-	-
Ethyl Benzene	13	260	cEMEG	8.67E+03	0/1
Freon 11	4.6	NA	-	-	-
Heptane	25	NA	-	-	-
Hexane	48	2,000	cEMEG	6.67E+04	0/1
Methylene Chloride	3.6	100	CREG	3.33E+03	0/1
Styrene	17	850	cEMEG	2.83E+04	0/1
Toluene	42	300	cEMEG	1.00E+04	0/1
Xylenes (total)	25	220	cEMEG	7.33E+03	0/1

Source of data: (ENVIRON 2011)

⁽¹⁾ = Building B (Figure 6)

CREG = ATSDR cancer risk evaluation guide

µg/m³ = micrograms per cubic meter

* Screening guidelines only used to select chemicals for further scrutiny, not to judge the risk of illness.

NA = not available

cEMEG = ATSDR chronic environmental media evaluation guide

EPA RSL = Environmental Protection Agency Regional Screening Level (Residential Air)

Table 4b. Building C⁽¹⁾ - Sub-slab Soil Gas Concentrations Above Screening Levels (adjusted 0.03 attenuation value) at the Orlando Gasification Plant Site - October, 2010

Contaminants	Sub-slab Soil Gas Concentration (µg/m ³)	Air Screening Level* (unadjusted) (µg/m ³)	Source of Air Screening Guideline	Air Screening Level* (adjusted) (µg/m ³)	# Above Screening Level*/Total #
2-Butanone (Methyl Ethyl Ketone)	4.3	5,000	Rfc	1.67E+05	0/1
Acetone	22	31,000	cEMEG	1.03E+06	0/1
Carbon Disulfide	2.9	930	cEMEG	3.10E+04	0/1
Chloroform	21	0.043	CREG	1.43E+00	1/1
Ethyl Benzene	4.2	260	cEMEG	8.67E+03	0/1
Styrene	8.2	850	cEMEG	2.83E+04	0/1
Toluene	3	300	cEMEG	1.00E+04	0/1
Xylenes (total)	21.6	220	cEMEG	7.33E+03	0/1

Source of data: (ENVIRON 2011)

⁽¹⁾= Building C (Figure 6)

CREG = ATSDR cancer risk evaluation guide

µg/m³ = micrograms per cubic meter

* Screening guidelines only used to select chemicals for further scrutiny, not to judge the risk of illness.

cEMEG = ATSDR chronic environmental media evaluation guide

EPA RSL = Environmental Protection Agency Regional Screening Level (Residential Air)

Table 5. Contaminant Concentrations in On-Site Surface Soil (0 to 6 Inches Deep) at the Orlando Gasification Plant Site – April, 2004

Contaminants	Concentration Range (mg/kg)	Maximum Concentration in Surface Soil (mg/kg) (sample#)	Soil Screening Guideline (mg/kg)*	Source of Screening Guideline	# of samples above screening guideline/total # samples
Arsenic	0.5 U - 25	25 (SS-3)	15	RMEG	2/12
DBA	0.02 – 1.1	1.1 (SS-2)	NA	NA	NA
Lead	16 J - 80 J	80J (SS-11)	NA	NA	NA
PAHs as BaP TEQ	0.07 – 29.54	29.54 (SS-2)	0.1	CREG	11/12
PCB	0.1 U - 0.24	0.24 (SS-14)	0.35	CREG	0/12

source of data [ARCADIS 2009]

BaP TEQ = Benzo(a)Pyrene Toxicity Equivalents

CREG = ATSDR cancer risk evaluation guide

DBA = Dibenz(a,h)anthracene

EPA = US Environmental Protection Agency

J = estimated value

NA = not available

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

RMEG = reference dose media evaluation guide

U = analyte not detected; reporting limit shown

* Screening guidelines only used to select chemicals for further scrutiny, not to judge the risk of illness. As no level of lead exposure is safe, ATSDR does not have a soil screening guideline for lead.

Table 6. Estimated Worker Dose and Increased Cancer Risk From Inadvertent Ingestion of Surface Soil on the Orlando Gasification Plant Site

Contaminants	Maximum On-Site Soil Concentration (0-6" deep) (mg/kg)	Estimated Worker Maximum Inadvertent Soil Ingestion Noncancer Dose (mg/kg/day)	ATSDR Minimal Risk Level (mg/kg/day)	Estimated Worker Maximum Inadvertent Soil Ingestion Cancer Dose (mg/kg/day)	Oral Cancer Slope Factor (mg/kg-day) ⁻¹	Source of Oral Cancer Slope Factor	Estimated Increased Cancer Risk
Arsenic	25 ⁽¹⁾	1.9×10^{-5}	3×10^{-4} (chronic)	4.3×10^{-6}	1.5	EPA IRIS	6.4×10^{-6} (low)
DBA	1.1	1.9×10^{-7}	NA ***	6.2×10^{-8}	4.1	Cal EPA	4.5×10^{-7} (low)
Lead	80 J		NA **	NA	NA	NA	NA
PAHs as BaP TEQ	29.54	2.6×10^{-5}	NA ***	8.5×10^{-6}	7.3	EPA IRIS	6.2×10^{-5} (low)
PCBs	0.24	2.1×10^{-7}	2×10^{-5} (chronic)	6.9×10^{-8}	0.04	EPA IRIS	2.7×10^{-9} (low)

source of data [ARCADIS 2009]

ATSDR = Agency for Toxic Substances and Disease Registry

BaP TEQ = Benzo(a)Pyrene Toxicity Equivalents

DBA = Dibenz(a,h)anthracene

EPA IRIS = U.S. Environmental Protection Agency Integrated Risk Information System [EPA 2013b]

J = estimated value

mg/kg = milligrams per kilogram

mg/kg/day = milligrams per kilogram per day

NA = not available

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

µg/dL = micrograms per deciliter

⁽¹⁾ = A relative bioavailability factor of 60% of the maximum concentration was used in the dose and risk calculations for arsenic [EPA 2015]

** = Minimal risk levels for lead have not been established but the Centers for Disease Control and Prevention considers blood lead levels in children above 5µg/dL to be elevated

*** = The Centers for Disease Control and Prevention has not calculated a minimal risk level for PAHs but the maximum dose is well below the oral no adverse effect level of 1.3 mg/kg/day

Table 7. Contaminant Concentrations in Off-Site Residential Surface Soil (0 to 6 inches deep) Near the Orlando Gasification Site - August 2006

Contaminants	Sample Location ⁽¹⁾ SS-29 (mg/kg)	Sample Location SS-30 (mg/kg)	Sample Location SS-31 (mg/kg)	Sample Location SS-32 (mg/kg)	Sample Location SS-33 (mg/kg)	Sample Location SS-34 (mg/kg)	Sample Location SS-35 (mg/kg)	Sample Location SS-36 (mg/kg)	Sample Location SS-37** (mg/kg)
Arsenic	0.35 U	0.5	0.2 U	0.8	0.4	0.4	0.3 U	0.2 U	13
DBA	0.18	0.01 U	0.01 U	0.01 U	0.01 U	0.01 U	0.01 U	0.19	0.01 U
Lead	75.3	136	53	58	162	25	51	44	485**
PAHs as B(a)P TEQ	0.69	0.22	0.18	0.01	0.28	0.15	0.24	0.52	0.41
PCB	NA	NA	NA	NA	NA	NA	NA	NA	NA

Data source [Arcadis 2009]

⁽¹⁾ sample locations are shown in Figure 4

B(a)P TEQ = Benzo(a)Pyrene Toxicity Equivalents

J = estimated value

CREG = ATSDR cancer risk evaluation guide

NA = not applicable

EPA = US Environmental Protection Agency

U = analyte not detected;
reporting limit shown

FDEP = Florida Department of Environmental Protection

mg/kg = milligrams per kilogram

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

RMEG = reference dose media evaluation guide

SCTL = soil cleanup target level

* Screening guidelines only used to select chemicals for further scrutiny, not to judge the risk of illness.

Table 7 (continued). Contaminant Concentrations in Off-Site Residential Surface Soil (0 to 6 inches deep) Near the Orlando Gasification Site - August 2006

Contaminants	Sample Location (¹) SS-38 (mg/kg)	Sample Location SS-39 (mg/kg)	Concentration Range (mg/kg)	Maximum Concentration in Surface Soil (mg/kg) [sample#]	Soil Screening Guideline (mg/kg)*	Source of Screening Guideline	# of samples above screening guideline/total # samples
Arsenic	0.6	0.2 U	0.2 U - 13	13 [SS-37]	15	RMEG	0/11
DBA	0.01 U	0.01 U	0.01 U - 0.19	0.19 [SS-36]	NA	NA	NA
Lead	38	49	25 - 485**	485 [SS-37]**	NA	NA	NA
PAHs as B(a)P TEQ	0.2	0.26	0.01 - 0.69	0.69 [SS-29]	0.1	CREG	10/11
PCB	Na	na	na	na	0.35	CREG	na

Data source [Arcadis 2009]

(¹) sample locations are shown in Figure 4

B(a)P TEQ = Benzo(a)Pyrene Toxicity Equivalents

J = estimated value

CREG = ATSDR cancer risk evaluation guide

na = not analyzed for

EPA = US Environmental Protection Agency

NA = non-applicable

FDEP = Florida Department of Environmental Protection

U = analyte not detected; reporting limit shown

mg/kg = milligrams per kilogram

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

RMEG = reference dose media evaluation guide

SCTL = soil cleanup target level

* Screening guidelines only used to select chemicals for further scrutiny, not to judge the risk of illness. -

** In September 2015 the City of Orlando retested location SS-37 for lead. 5 surface soil samples were collected with results between 16 mg/kg and 75 mg/kg. -

Table 8. Maximum Residential Soil Dose and Increased Cancer Risk From Inadvertent Soil Ingestion Near the Orlando Gasification Plant Site

Contaminants	Maximum Off-Site Soil Concentration (0-6" deep) (mg/kg)	Estimated Maximum Residential Inadvertent Soil Ingestion Noncancer Dose (mg/kg/day)	ATSDR Minimal Risk Level (mg/kg/day)	Estimated Maximum Residential Inadvertent Soil Ingestion Cancer Dose (mg/kg/day)	Oral Cancer Slope Factor (mg/kg-day) ⁻¹	Source of Oral Cancer Slope Factor	Estimated Increased Cancer Risk
Arsenic	13 ⁽¹⁾	1.4×10^{-4}	3×10^{-4} (chronic)	4.1×10^{-6}	1.5	EPA IRIS	3.1×10^{-6} (low)
DBA	0.51	3.2×10^{-7}	None *	1.3×10^{-7}	7.3	EPA IRIS	1.4×10^{-5} (low)
PAHs as BaP TEQ	0.69	4.3×10^{-7}	NA	1.8×10^{-7}	7.3	EPA IRIS	2.0×10^{-5} (low)
PCB-1260	ND	NA	2×10^{-5} (chronic)	NA	0.04	EPA IRIS	NA

source of data [ARCADIS 2009]

ATSDR = Agency for Toxic Substances and Disease Registry

BaP TEQ - Benzo(a)Pyrene Toxicity Equivalents

DBA = Dibenz(a,h)anthracene

EPA IRIS = U.S. Environmental Protection Agency Integrated Risk Information System [EPA 2013b]

mg/kg = milligrams per kilogram

mg/kg/day = milligrams per kilogram per day

NA = non-applicable

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

µg/dL = micrograms per deciliter

⁽¹⁾ = A relative bioavailability factor of 60% of the maximum concentration was used in the dose and risk calculations for arsenic [EPA 2015]

* = The Centers for Disease Control and Prevention has not calculated a minimal risk level for PAHs but the maximum dose is well below the oral no adverse effect level of 1.3 mg/kg/day

Table 10. Contaminant Concentrations in Off-Site Surface Soil (0-6 Inches Deep) Along West Robinson Street and Chatham Avenue at the Orlando Gasification Plant Site – April, 2004

Contaminants	Concentration Range (mg/kg)	Maximum Concentration in Surface Soil (mg/kg) (sample#)	Soil Screening Guideline (mg/kg)*	Source of Screening Guideline	# of samples above screening guideline/total # samples
Arsenic	0.2 U - 1.2	1.2 (SS-9)	15	RMEG	0/7
DBA	0.02 – 0.37	0.37 (SS-7)	NA	NA	NA
Lead	11 J - 110 J	110 J (SS-9)	NA	NA	NA
PAHs as BaP TEQ	0.12 – 2.5	2.5 (SS-7)	0.1	CREG	7/7
PCB-1260	ND	NA	0.35	CREG	0/7

source of data [ARCADIS 2009]

BaP TEQ = Benzo(a)Pyrene Toxicity Equivalents

CREG = ATSDR cancer risk evaluation guide

DBA = Dibenz(a,h)anthracene

EPA = U.S. Environmental Protection Agency

FDEP = Florida Department of Environmental Protection

mg/kg = milligrams per kilogram

NA = not available

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

RMEG = reference dose media evaluation guide

U = analyte not detected; reporting limit shown

* Screening guidelines only used to select chemicals for further scrutiny, not to judge the risk of illness.

Table 11. Maximum Pedestrian Dose and Increased Cancer Risk from Inadvertent Ingestion of Off-Site Surface Soil Along West Robinson Street and Chatham Avenue Near the Orlando Gasification Plant Site

Contaminants	Maximum Off-Site Soil Concentration (0-6" deep) (mg/kg)	Estimated Maximum Pedestrian Inadvertent Soil Ingestion Noncancer Dose (mg/kg/day)	ATSDR Minimal Risk Level (mg/kg/day)	Estimated Maximum Residential Inadvertent Soil Ingestion Cancer Dose (mg/kg/day)	Oral Cancer Slope Factor (mg/kg-day) ⁻¹	Source of Oral Cancer Slope Factor	Estimated Increased Cancer Risk
Arsenic	1.2 ⁽¹⁾	5.2 x 10 ⁻⁷	3 x 10 ⁻⁴ (chronic)	1.3 x 10 ⁻⁷	1.5	EPA IRIS	2.0 x 10 ⁻⁷ (low)
DBA	0.37	2.6 x 10 ⁻⁷	NA **	6.8 x 10 ⁻⁸	7.3	EPA IRIS	4.9 x 10 ⁻⁷ (low)
PAHs as BaP TEQ	2.5	1.8 x 10 ⁻⁶	NA ***	4.6 x 10 ⁻⁷	7.3	EPA IRIS	3.4 x 10 ⁻⁶ (low)
PCB-1260	ND	NA	2 x 10 ⁻⁵ (chronic)	NA	0.04	EPA IRIS	NA

source of data [ARCADIS 2009]

ATSDR = Agency for Toxic Substances and Disease Registry

BaP TEQ - Benzo(a)Pyrene Toxicity Equivalents

DBA = Dibenzo(a,h)anthracene

EPA IRIS = U.S. Environmental Protection Agency Integrated Risk Information System (EPA 2013b)

J = estimated value

mg/kg = milligrams per kilogram

mg/kg/day = milligrams per kilogram per day

NA = non-applicable

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

µg/dL = micrograms per deciliter

⁽¹⁾ = A relative bioavailability factor of 60% of the maximum concentration was used in the dose and risk calculations for arsenic [EPA 2015]

* = This is an estimate using EPA's IEUBK model of the blood lead level in children exposed to soil with a lead concentration of 110 mg/kg. -

** = The Centers for Disease Control and Prevention has not calculated a minimal risk level for PAHs but the maximum dose is well below the oral no adverse effect level of 1.3 mg/kg/day -

Table 12. Contaminant Concentrations in Surface Soil (0-6 Inches Deep) Along the Railroad Track North of the Orlando Gasification Plant Site – April, 2004

Contaminants	Concentration Range (mg/kg)	Maximum Concentration in Surface Soil (mg/kg) (sample#)	Soil Screening Guideline (mg/kg)*	Source of Screening Guideline	# of samples above screening guideline/total # samples
Arsenic	6.9 (6.4)** - 39	39 (SS-19)	15	RMEG	2/6
DBA	1.1 – 6.7	6.7 (SS-20)	NA	NA	NA
Lead	230 J - 1200 J	1200 (SS-21)	NA	NA	NA
PAHs as BaP TEQ	7.9 – 65.4	65.4 (SS-20)	0.1	CREG	6/6
PCB-1260	NA	NA	0.35	CREG	0/6

source of data [ARCADIS 2009]

BaP TEQ = Benzo(a)Pyrene Toxicity Equivalents

CREG = ATSDR cancer risk evaluation guide

DBA = Dibenzo(a,h)anthracene

FDEP = Florida Department of Environmental Protection

J = estimated value

mg/kg = milligrams per kilogram

NA = not available

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

RMEG = reference dose media evaluation guide

SCTL = soil cleanup target level

* Screening guidelines only used to select chemicals for further scrutiny, not to judge the risk of illness.

Table 13. Maximum Trespasser Dose and Increased Risk From Inadvertent Ingestion of Surface Soil (0-6 Inches Deep) Along the RR Track North of the Orlando Gasification Plant Site

Contaminants	Maximum Off-Site Soil Concentration (0-6" deep) (mg/kg)	Estimated Maximum Trespasser Inadvertent Soil Ingestion Dose (mg/kg/day)	ATSDR Minimal Risk Level (mg/kg/day)
Arsenic	39 ⁽¹⁾	3.0×10^{-5}	3×10^{-4} (chronic)
DBA	6.7	NC	NA
PAHs (Noncarcinogenic)	140	NC	NA
PCB-1260	ND	NA	2×10^{-5} (chronic)

Source of data [ARCADIS 2009]

ATSDR = Agency for Toxic Substances and Disease Registry

DBA = Dibenzo(a,h)anthracene

mg/kg = milligrams per kilogram

mg/kg/day = milligrams per kilogram per day

NA = non-applicable

NC = Dose was not calculated since noncarcinogenic PAH concentrations were below EPA screening levels

ND = below detection level

PAH = polycyclic aromatic hydrocarbon

PCB = polychlorinated biphenyl

µg/dL = micrograms per deciliter

⁽¹⁾ = A relative bioavailability factor of 60% of the maximum concentration was used in the dose and risk calculations for arsenic [EPA 2015]

Appendix C

Figures

MAP SOURCE: USGS TOPOGRAPHIC QUADRANGLE
ORLANDO, FLORIDA

ORLANDO GASIFICATION SITE
600 W. ROBINSON ST., ORLANDO, FLORIDA

SITE LOCATION MAP

ARCADIS

FIGURE 1

Figure 2. Orlando Gasification Current Site Layout

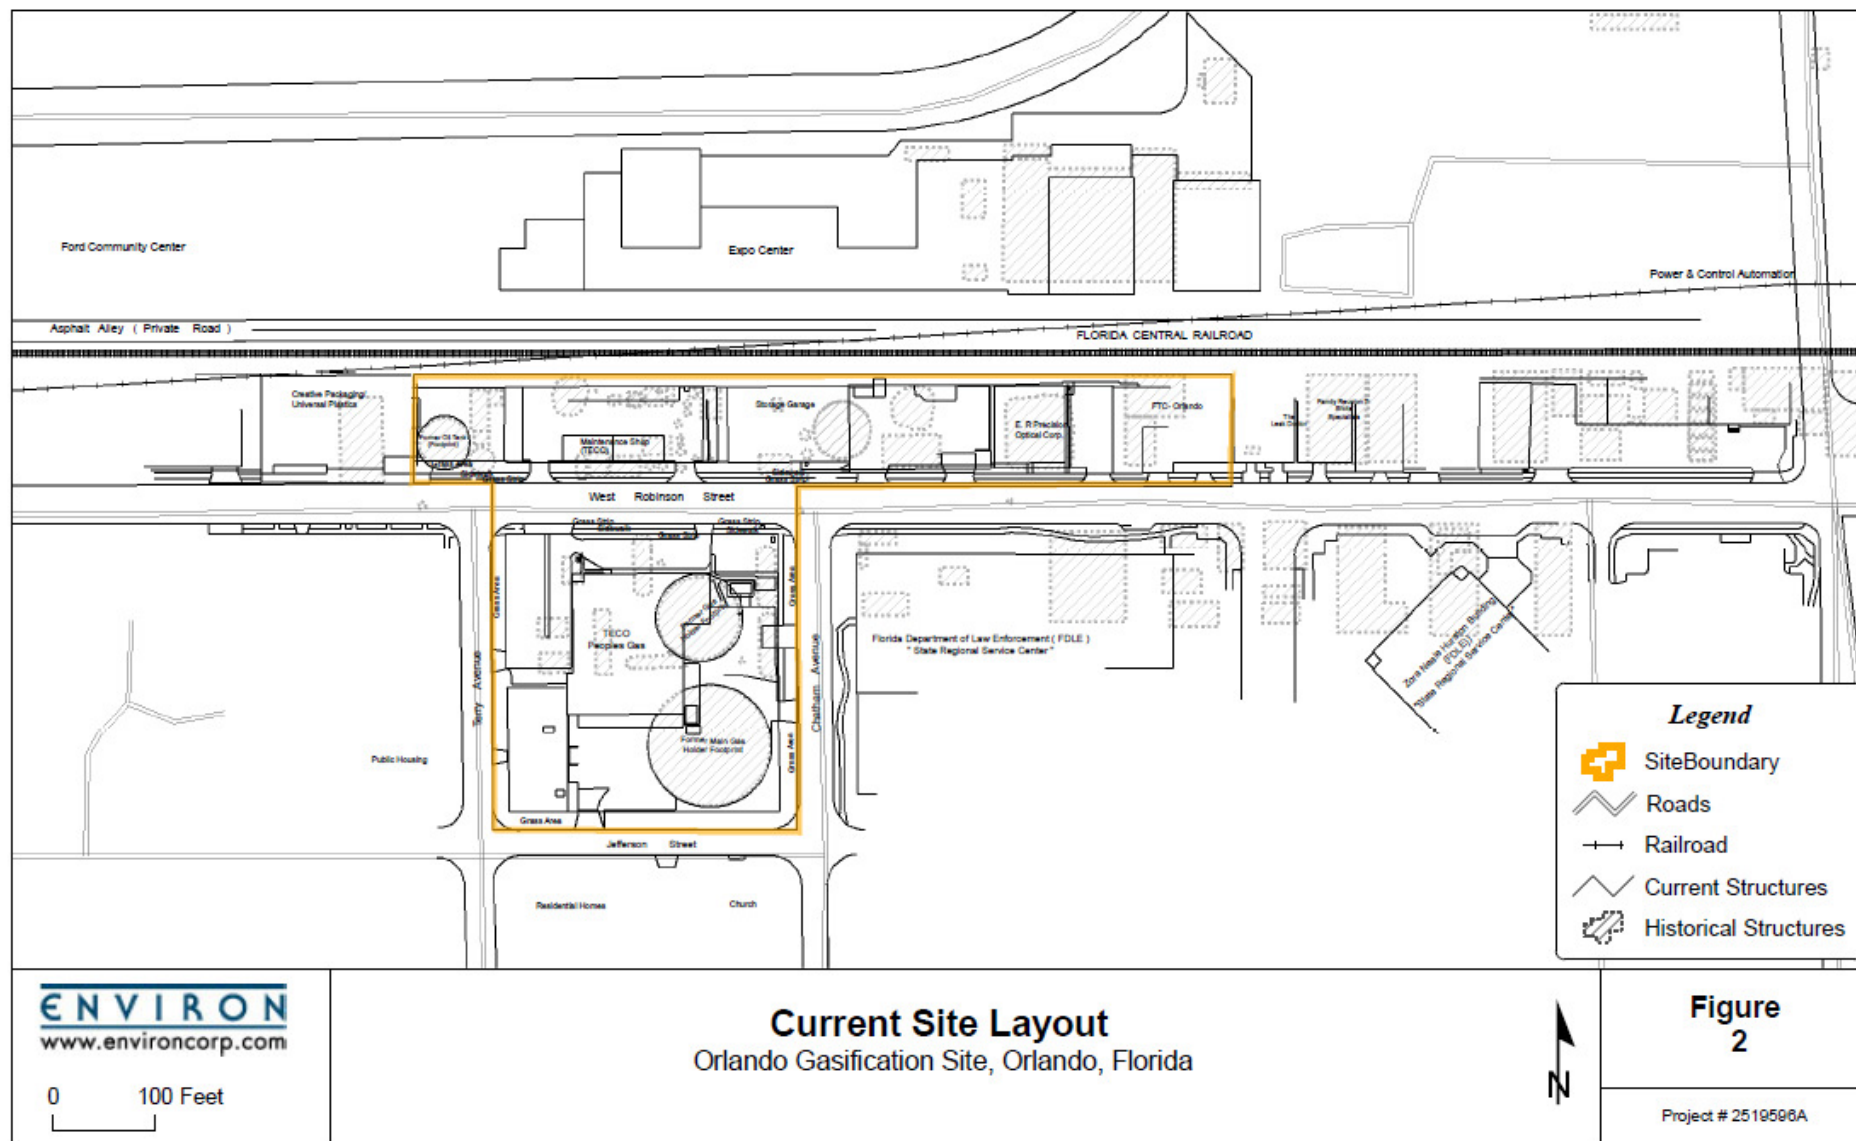


Figure 3. Orlando Gasification On-Site Surface Features

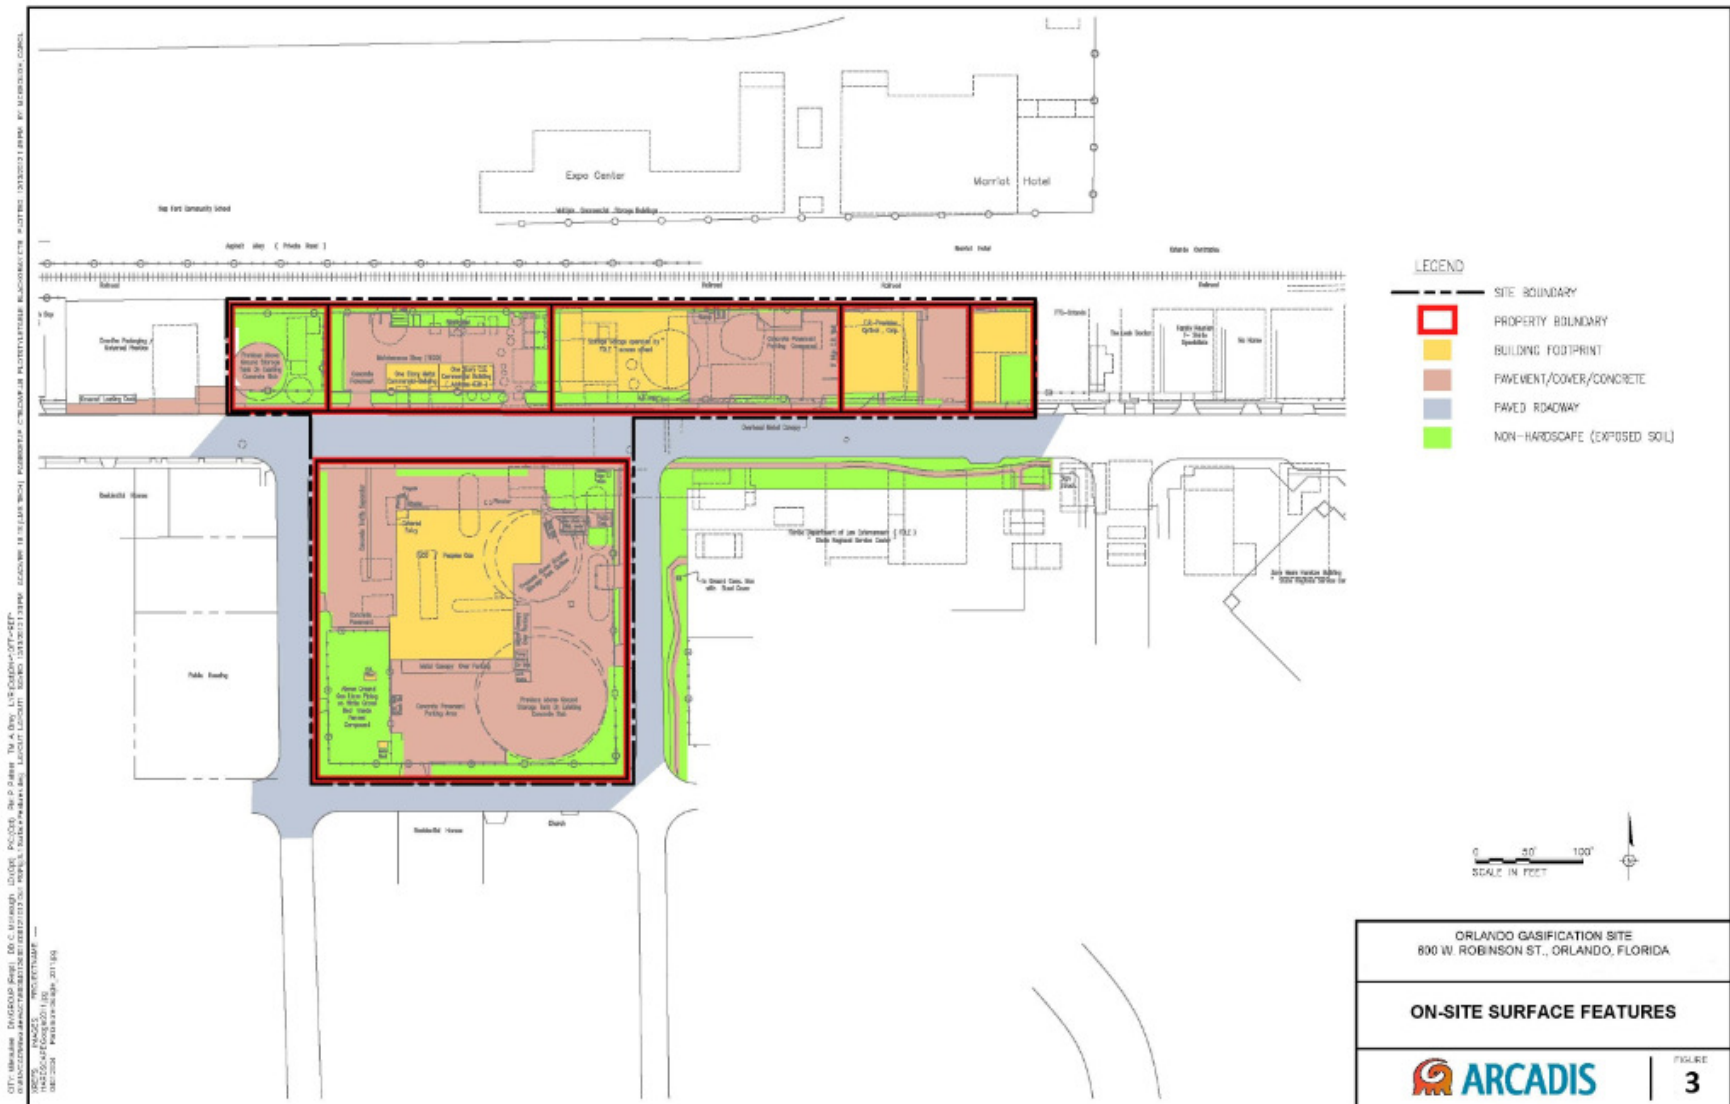


Figure 4. Orlando Gasification Soil Sample Locations

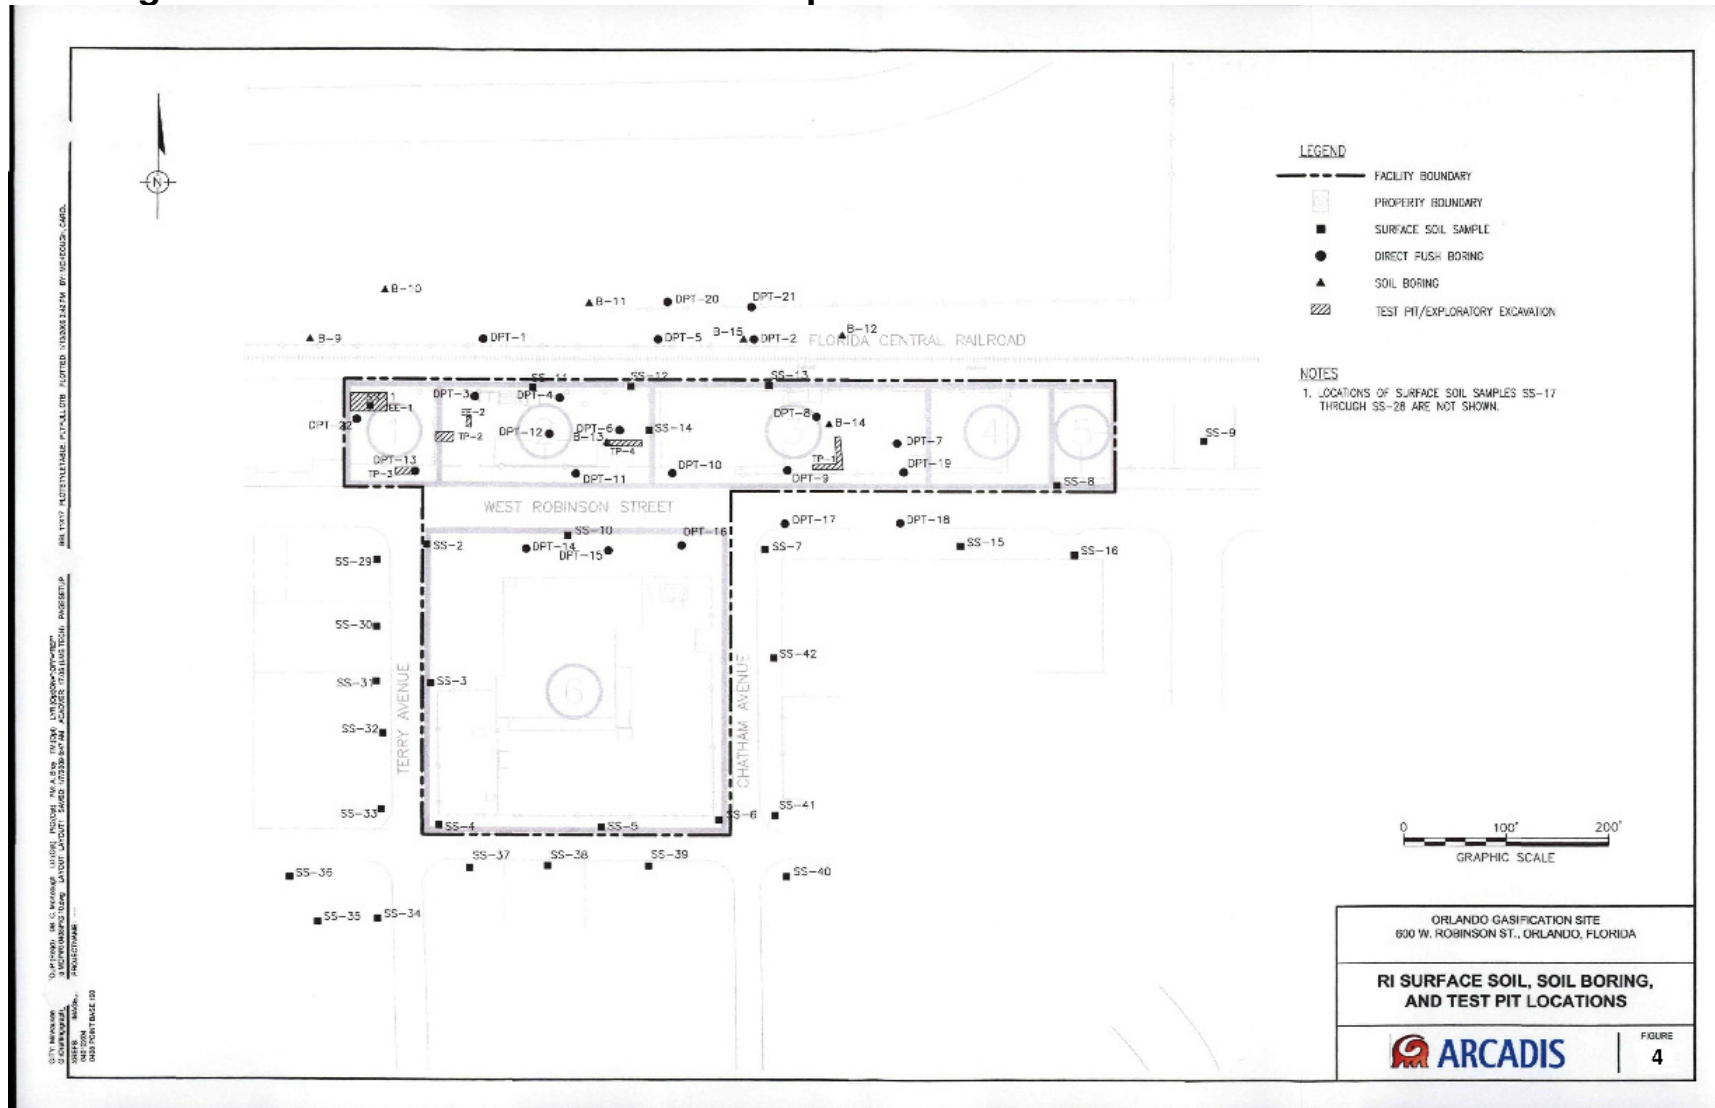


Figure 5. Orlando Gasification Vicinity Surface Soil Results


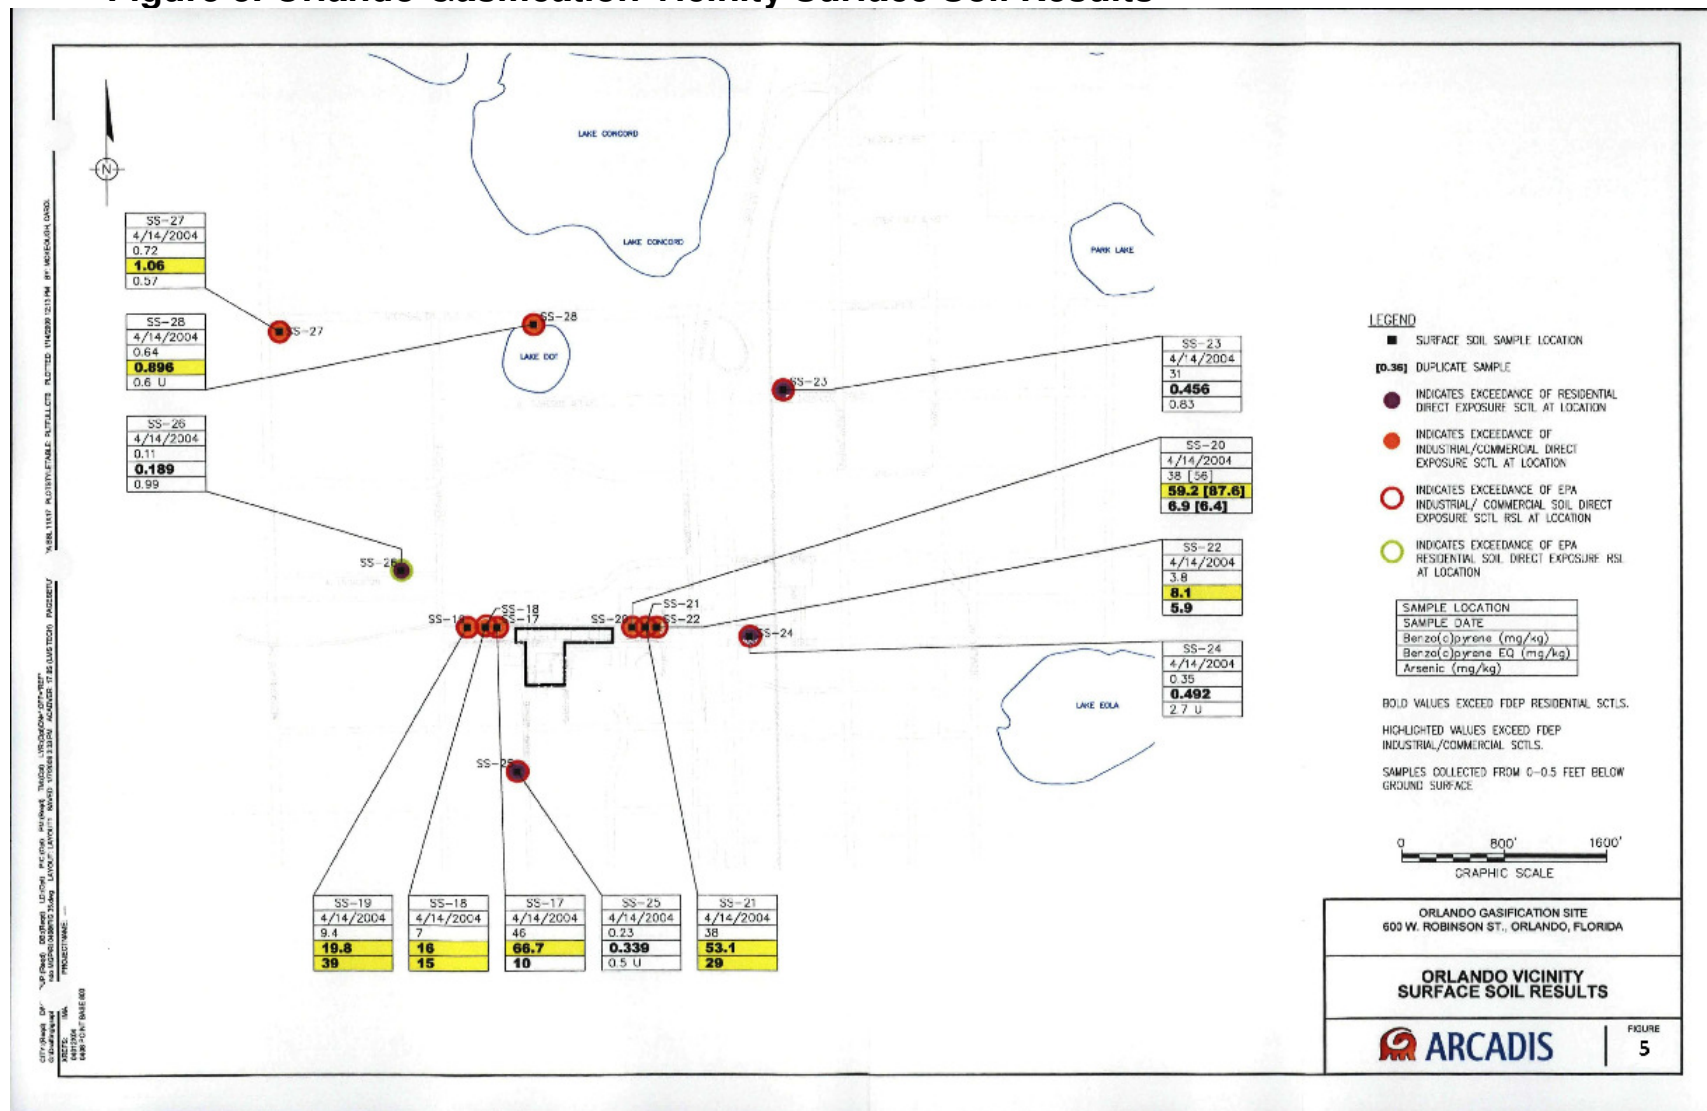


Figure 6. Orlando Gasification On-Facility Soil Gas Sampling Locations

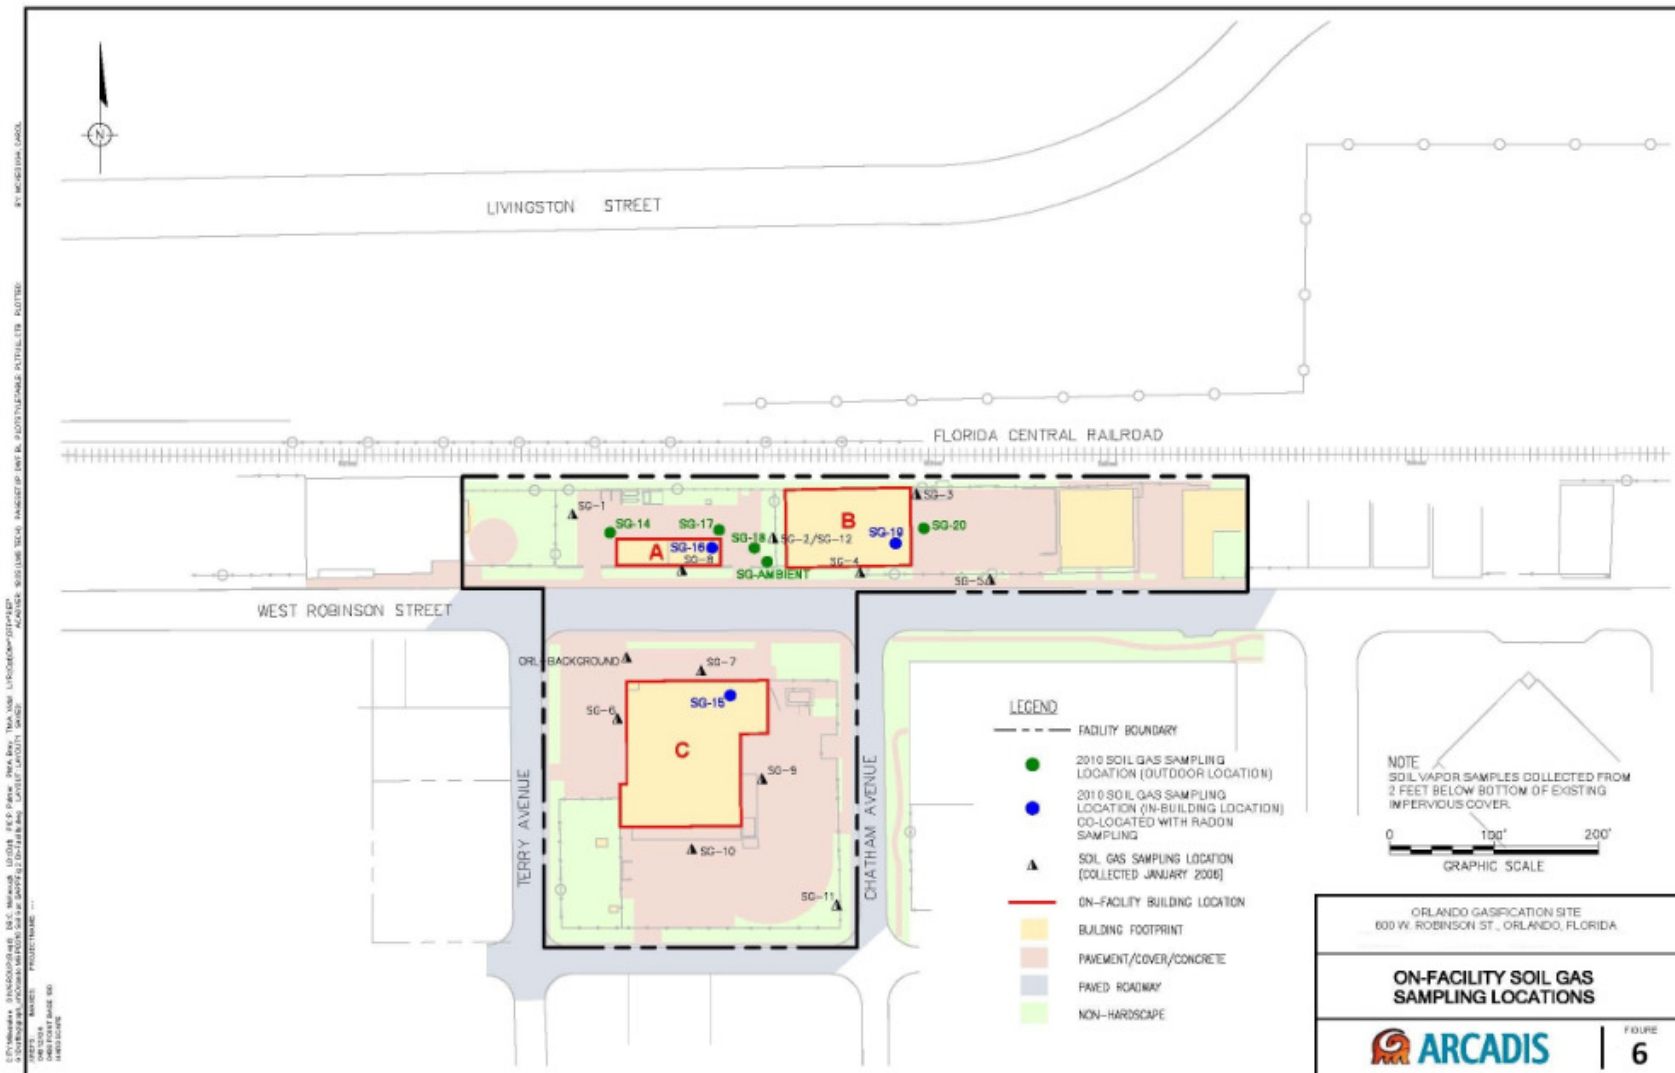

Appendix D

Office of Environmental Health Hazard Assessment (OEHHA)

Potency Equivalency Factors (PEFs)

For PAHs based on Benzo(a)pyrene Potency

OEHHA PEF WEIGHTING SCHEME FOR PAHS AND THEIR RESULTING CANCER POTENCY VALUES

PAH or derivative	PEF	Unit Risk ($\mu\text{g}/\text{m}^3$)⁻¹	Inhalation Slope Factor ($\text{mg}/\text{kg}\cdot\text{day}$)⁻¹	Oral Slope Factor ($\text{mg}/\text{kg}\cdot\text{day}$)⁻¹
benzo[a]pyrene (index compound)	1.0	1.1×10^{-3}	3.9	$1.2 \times 10^{+1}$
benz[a]anthracene	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
benzo[b]fluoranthene	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
benzo[j]fluoranthene	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
benzo[k]fluoranthene	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
dibenz[a,j]acridine	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
dibenz[a,h]acridine	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
7H-dibenzo[c,g]carbazole	1.0	1.1×10^{-3}	3.9	$1.2 \times 10^{+1}$
dibenzo[a,e]pyrene	1.0	1.1×10^{-3}	3.9	$1.2 \times 10^{+1}$
dibenzo[a,h]pyrene	10	1.1×10^{-2}	$3.9 \times 10^{+1}$	$1.2 \times 10^{+2}$
dibenzo[a,i]pyrene	10	1.1×10^{-2}	$3.9 \times 10^{+1}$	$1.2 \times 10^{+2}$
dibenzo[a,l]pyrene	10	1.1×10^{-2}	$3.9 \times 10^{+1}$	$1.2 \times 10^{+2}$
indeno[1,2,3-cd]pyrene	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
5-methylchrysene	1.0	1.1×10^{-3}	3.9	$1.2 \times 10^{+1}$
1-nitropyrene	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
4-nitropyrene	0.1	1.1×10^{-4}	3.9×10^{-1}	1.2
1,6-dinitropyrene	10	1.1×10^{-2}	$3.9 \times 10^{+1}$	$1.2 \times 10^{+2}$
1,8-dinitropyrene	1.0	1.1×10^{-3}	3.9	$1.2 \times 10^{+1}$
6-nitrochrysene	10	1.1×10^{-2}	$3.9 \times 10^{+1}$	$1.2 \times 10^{+2}$
2-nitrofluorene	0.01	1.1×10^{-5}	3.9×10^{-2}	1.2×10^{-1}
chrysene	0.01	1.1×10^{-5}	3.9×10^{-2}	1.2×10^{-1}

Source: [OEHHA 1993]

Appendix E


Information on Lead

Ways to protect your health

By keeping dirt from getting into your house and into your body



Wash and peel all fruits, vegetables, and root crops

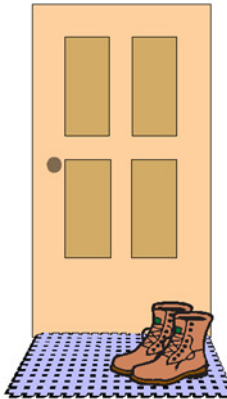

Wipe shoes on doormat or remove shoes



Don't eat food, chew gum, or smoke when working in the yard



Damp mop floors and damp dust counters and furniture regularly



Wash dogs regularly



Wash children's toys regularly



Wash children's hands and feet after they have been playing outside

Prevent Childhood Lead Poisoning

Exposure to lead can seriously harm a child's health.



Damage to the brain and nervous system



Slowed growth and development



Learning and behavior problems



Hearing and speech problems

This can cause:




Lower IQ

Decreased ability to pay attention

Underperformance in school



Lead can be found throughout a child's environment.

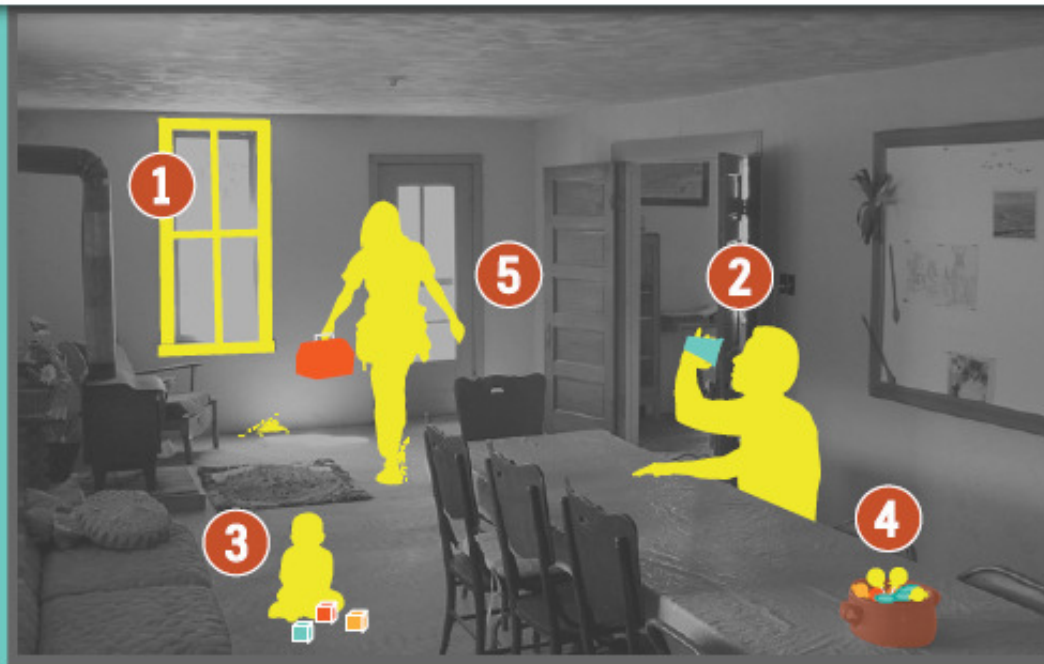

1



Homes built before 1978 (when lead-based paints were banned) probably contain lead-based paint.



When the paint peels and cracks, it makes lead dust. Children can be poisoned when they swallow or breathe in lead dust.

3



Lead can be found in some products such as toys and toy jewelry.

4



Lead is sometimes in candies imported from other countries or traditional home remedies.

2



Certain water pipes may contain lead.

5



Certain jobs and hobbies involve working with lead-based products, like stain glass work, and may cause parents to bring lead into the home.

The Impact

535,000

U. S. children ages 1 to 5 years have blood lead levels high enough to damage their health.



24 million

homes in the U.S. contain deteriorated lead-based paint and elevated levels of lead-contaminated house dust.



4 million of these are home to young children.

It can cost

\$5,600

in medical and special education costs for each seriously lead-poisoned child.



The good news:

Lead poisoning is **100%** preventable.

Take these steps to make your home lead-safe.



Talk with your child's doctor about a simple blood lead test. If you are pregnant or nursing, talk with your doctor about exposure to sources of lead.



Talk with your local health department about testing paint and dust in your home for lead if you live in a home built before 1978.



Renovate safely. Common renovation activities (like sanding, cutting, replacing windows, and more) can create hazardous lead dust. If you're planning renovations, use contractors certified by the Environmental Protection Agency (visit www.epa.gov/lead for information).



Remove recalled toys and toy jewelry from children and discard as appropriate. Stay up-to-date on current recalls by visiting the Consumer Product Safety Commission's website: www.cpsc.gov.



Visit www.cdc.gov/nceh/lead to learn more.

Appendix E

Response to Public Comments

On September 13, 2016, the DOH posted a public comment version of this report on its website. On September 20, 2016, the DOH mailed a community update and survey to approximately 280 addresses near the Orlando Gasification Plant. This update summarized the draft report and solicited public comment through November 13, 2016. DOH received two comments outside the scope of this report and responded by email.

The DOH also received a letter asserting that soil gas data collected in 2006 and 2010 was sufficient and additional indoor air testing is not necessary.

Response: DOH and ATSDR use multiple lines of evidence to evaluate the vapor intrusion pathway. In the absence of indoor air data, we cannot conclude whether chemicals are present in indoor air that may harm current or future on-site workers.

Glossary

Absorption

The process of taking in. For a person or animal, absorption is the process of a substance getting into the body through the eyes, skin, stomach, intestines, or lungs.

Acute

Occurring over a short time (compare with **chronic**).

Acute exposure

Contact with a substance that occurs once or for only a short time (up to 14 days) (compare with **intermediate duration exposure** and **chronic exposure**).

Adverse health effect

A change in body function or cell structure that might lead to disease or health problems.

Ambient

Surrounding (for example, *ambient* air).

Analyte

A substance measured in the laboratory. A chemical for which a sample (such as water, air, or blood) is tested in a laboratory. For example, if the analyte is mercury, the laboratory test will determine the amount of mercury in the sample.

Cancer

Any one of a group of diseases that occurs when cells in the body become abnormal and grow or multiply out of control.

Cancer risk

A theoretical risk of for getting cancer if exposed to a substance every day for 70 years (a lifetime exposure). The true risk might be lower.

Carcinogen

A substance that causes cancer.

Chronic

Occurring over a long time (more than 1 year) (compare with **acute**).

Chronic exposure

Contact with a substance that occurs over a long time (more than 1 year) (compare with **acute exposure** and **intermediate duration exposure**).

Comparison value (CV)

Calculated concentration of a substance in air, water, food, or soil that is unlikely to cause harmful (adverse) health effects in exposed people. The CV is used as a screening level during

the public health assessment process. Substances found in amounts greater than their CVs might be selected for further evaluation in the public health assessment process.

Completed exposure pathway (see **exposure pathway**).

Concentration

The amount of a substance present in a certain amount of soil, water, air, food, blood, hair, urine, breath, or any other media.

Contaminant

A substance that is either present in an environment where it does not belong or is present at levels that might cause harmful (adverse) health effects.

Dermal

Referring to the skin. For example, dermal absorption means passing through the skin.

Dermal contact

Contact with (touching) the skin (see **route of exposure**).

Detection levels

The lowest concentration of a chemical that can reliably be distinguished from a zero concentration.

Dose (for chemicals that are not radioactive)

The amount of a substance to which a person is exposed over some time period. Dose is a measurement of exposure. Dose is often expressed as milligram (amount) per kilogram (a measure of body weight) per day (a measure of time) when people eat or drink contaminated water, food, or soil. In general, the greater the dose, the greater the likelihood of an effect. An “exposure dose” is how much of a substance is encountered in the environment. An “absorbed dose” is the amount of a substance that actually got into the body through the eyes, skin, stomach, intestines, or lungs.

Environmental media

Soil, water, air, biota (plants and animals), or any other parts of the environment that can contain contaminants.

Environmental media and transport mechanism

Environmental media include water, air, soil, and **biota** (plants and animals). Transport mechanisms move contaminants from the source to points where human exposure can occur. The **environmental media and transport mechanism** is the second part of an **exposure pathway**.

EPA

United States Environmental Protection Agency.

Epidemiology

The study of the distribution and determinants of disease or health status in a population; the study of the occurrence and causes of health effects in humans.

Exposure

Contact with a substance by swallowing, breathing, or touching the skin or eyes. Exposure may be short-term (**acute exposure**), of intermediate duration, or long-term (**chronic exposure**).

Exposure assessment

The process of finding out how people come into contact with a hazardous substance, how often and for how long they are in contact with the substance, and how much of the substance they are in contact with.

Exposure pathway

The route a substance takes from its source (where it began) to its end point (where it ends), and how people can come into contact with (or get exposed to) it. An exposure pathway has five parts: a source of contamination (such as an abandoned business); an environmental media and transport mechanism (such as movement through groundwater); a point of exposure (such as a private well); a route of exposure (eating, drinking, breathing, or touching), and a receptor population (people potentially or actually exposed). When all five parts are present, the exposure pathway is termed a completed exposure pathway.

Groundwater

Water beneath the earth's surface in the spaces between soil particles and between rock surfaces (compare with **surface water**).

Hazard

A source of potential harm from past, current, or future exposures.

Hazardous waste

Potentially harmful substances that have been released or discarded into the environment.

Health consultation

A review of available information or collection of new data to respond to a specific health question or request for information about a potential environmental hazard. Health consultations are focused on a specific exposure issue. Health consultations are therefore more limited than a public health assessment, which reviews the exposure potential of each pathway and chemical (compare with **public health assessment**).

Ingestion

The act of swallowing something through eating, drinking, or mouthing objects. A hazardous substance can enter the body this way (see **route of exposure**).

Inhalation

The act of breathing. A hazardous substance can enter the body this way (see **route of exposure**).

Intermediate duration exposure

Contact with a substance that occurs for more than 14 days and less than a year (compare with **acute exposure** and **chronic exposure**).

Lowest-observed-adverse-effect level (LOAEL)

The lowest tested dose of a substance that has been reported to cause harmful (adverse) health effects in people or animals.

mg/kg

Milligram per kilogram.

Minimal risk level (MRL)

An ATSDR estimate of daily human exposure to a hazardous substance at or below which that substance is unlikely to pose a measurable risk of harmful (adverse), noncancerous effects.

MRLs are calculated for a route of exposure (inhalation or oral) over a specified time period (acute, intermediate, or chronic). MRLs should not be used as predictors of harmful (adverse) health effects (see **reference dose**).

No-observed-adverse-effect level (NOAEL)

The highest tested dose of a substance that has been reported to have no harmful (adverse) health effects on people or animals.

Plume

A volume of a substance that moves from its source to places farther away from the source.

Plumes can be described by the volume of air or water they occupy and the direction they move.

For example, a plume can be a column of smoke from a chimney or a substance moving with groundwater.

Point of exposure

The place where someone can come into contact with a substance present in the environment (see **exposure pathway**).

Population

A group or number of people living within a specified area or sharing similar characteristics (such as occupation or age).

Potentially responsible party (PRP)

A company, government, or person legally responsible for cleaning up the pollution at a hazardous waste site under Superfund. There may be more than one PRP for a particular site.

Prevention

Actions that reduce exposure or other risks, keep people from getting sick, or keep disease from getting worse.

Public comment period

An opportunity for the public to comment on agency findings or proposed activities contained in draft reports or documents. The public comment period is a limited time period during which comments will be accepted.

Public health assessment (PHA)

An ATSDR document that examines hazardous substances, health outcomes, and community concerns at a hazardous waste site to determine whether people could be harmed from coming into contact with those substances. The PHA also lists actions that need to be taken to protect public health (compare with **health consultation**).

Public meeting

A public forum with community members for communication about a site.

Receptor population

People who could come into contact with hazardous substances (see **exposure pathway**).

Reference dose (RfD)

An EPA estimate, with uncertainty or safety factors built in, of the daily lifetime dose of a substance that is unlikely to cause harm in humans.

Registry

A systematic collection of information on persons exposed to a specific substance or having specific diseases (see **exposure registry** and **disease registry**).

Remedial Investigation

The CERCLA process of determining the type and extent of hazardous material contamination at a site.

RfD

See **reference dose**.

Risk

The probability that something will cause injury or harm.

Route of exposure

The way people come into contact with a hazardous substance. Three routes of exposure are breathing (**inhalation**), eating or drinking (**ingestion**), or contact with the skin (**dermal contact**).

Sample

A portion or piece of a whole. A selected subset of a population or subset of whatever is being studied. For example, in a study of people the sample is a number of people chosen from a larger population (see **population**). An environmental sample (for example, a small amount of soil or water) might be collected to measure contamination in the environment at a specific location.

Solvent

A liquid capable of dissolving or dispersing another substance (for example, acetone or mineral spirits).

Source of contamination

The place where a hazardous substance comes from, such as a landfill, waste pond, incinerator, storage tank, or drum. A source of contamination is the first part of an **exposure pathway**.

Substance

A chemical.

Surface water

Water on the surface of the earth, such as in lakes, rivers, streams, ponds, and springs (compare with **groundwater**).

Toxicological profile

An ATSDR document that examines, summarizes, and interprets information about a hazardous substance to determine harmful levels of exposure and associated health effects. A toxicological profile also identifies significant gaps in knowledge on the substance and describes areas where further research is needed.

Toxicology

The study of the harmful effects of substances on humans or animals.

Uncertainty factor

Mathematical adjustments for reasons of safety when knowledge is incomplete. For example, factors used in the calculation of doses that are not harmful (adverse) to people. These factors are applied to the lowest-observed-adverse-effect-level (LOAEL) or the no-observed-adverse-effect-level (NOAEL) to derive a minimal risk level (MRL). Uncertainty factors are used to account for variations in people's sensitivity, for differences between animals and humans, and for differences between a LOAEL and a NOAEL. Scientists use uncertainty factors when they have some, but not all, the information from animal or human studies to decide whether an exposure will cause harm to people (also sometimes called a **safety factor**).

Volatile organic compounds (VOCs)

Organic compounds that evaporate readily into the air. VOCs include substances such as benzene, toluene, methylene chloride, and methyl chloroform.