


CHAPTER 5. POTENTIAL FOR HUMAN EXPOSURE

5.1 OVERVIEW

Copper and copper compounds have been identified in at least 929 of the 1,867 hazardous waste sites that have been proposed for inclusion on the EPA National Priorities List (NPL) (ATSDR 2019). However, the number of sites evaluated for copper and copper compounds is not known. The number of sites in each state is shown in Figure 5-1. Of these sites, 920 are located within the United States, 1 is located in Guam, 1 is located in the Virgin Islands, and 7 are located in Puerto Rico (not shown). Of the sites in the United States, 2 sites did not report a location and are not reflected in Figure 5-1.

Figure 5-1. Number of NPL Sites with Copper and Copper Compound Contamination

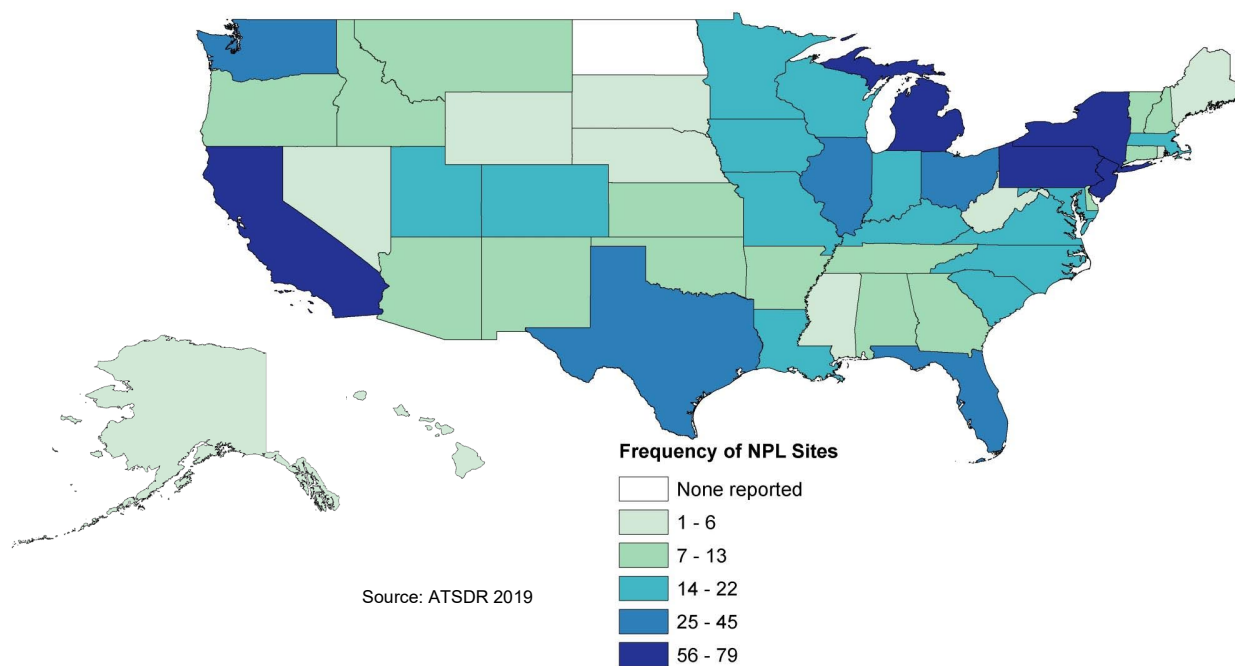

- Copper occurs naturally both in many minerals and in the metallic state. The top 10 applications for copper in the United States, in order of percentage of total use, are building wire, plumbing, and heating, automotive, air conditioning, refrigeration and natural gas, power utilities, telecommunications, in-plant equipment, ordnance, business electronics, and lighting and wiring devices.
- Industrial effluents, mining and production of copper and other metals, municipal solid waste management, and fossil fuel combustion account for a large portion of the total environmental

5. POTENTIAL FOR HUMAN EXPOSURE

releases of copper and copper compounds. Natural sources of copper releases include windblown dust, volcanoes, decaying vegetation, forest fires, and sea spray.

- Copper is an essential micronutrient present in many foods. Copper gluconate and copper sulfate are direct food additives generally recognized as safe by the FDA.
- The general population is expected to be exposed to copper daily via inhalation and ingestion of foods, and dermally to a lesser extent.
- People living near copper smelters and refineries and workers in these and other industries may be exposed to high levels of dust-borne copper by both inhalation and ingestion.

Copper and its compounds are naturally present in the earth's crust and can be discharged naturally to air and water during weathering. Mean copper concentrations in the atmosphere measured at multiple U.S. locations ranged between 0.013 to 0.0792 $\mu\text{g}/\text{m}^3$ from 2016 to 2019 (EPA 2020a). Airborne copper is associated with particulates that are derived from suspended soils, combustion sources, the manufacture or processing of copper-containing materials, or mine tailings. Copper associated with particulate matter is emitted into the air naturally from windblown dust, volcanoes, and anthropogenic sources, the largest of which are primary copper smelters and ore processing facilities. The major sources of releases to water are mining operations, agriculture, sludge from publicly owned treatment works (POTWs), and municipal and industrial solid waste. Mining and milling contribute the most waste. Copper is released to water as a result of natural weathering of soil and discharges from industries and sewage treatment plants. Copper compounds may also be intentionally applied to water to kill algae. Copper concentrations in groundwater vary widely from 0.2 to 98.4 $\mu\text{g}/\text{L}$ (USGS 2020b). Copper is predominantly found in the Cu(II) state. Most of it is complexed or tightly bound to organic matter. Little is present in the free (hydrated) or readily exchangeable form. The combined processes of complexation, adsorption, and precipitation control the level of free Cu(II). The chemical conditions in most natural water is such that, even at relatively high copper concentrations, these processes will reduce the free Cu(II) concentration to extremely low values. The USGS reports the median level of copper in soil and sediment as 30 ppm (USGS 2016). Copper concentrations will be higher in soils that are close to sources of copper emissions.

In the general population, the highest exposures to copper come from drinking water and food. Copper can leach into drinking water from contact surfaces within the water distribution systems, the water treatment plant, and the in-home plumbing system. When a system has not been flushed after a period of disuse, the concentration of copper in tap water can exceed 1.3 mg/L, the EPA drinking water Action Level.

5. POTENTIAL FOR HUMAN EXPOSURE

Many workers are exposed to copper in agriculture, industries connected with copper production, metal plating, and other industries. Based on the available data, people living close to NPL sites contaminated with copper may be at greater risk for exposure to copper than the general population with respect to inhalation of airborne particulates from the NPL sites, ingestion of contaminated water or soil, and/or uptake of copper by fruits and vegetables raised in gardens of residents living near NPL sites. People living near copper smelters and refineries and workers in these and other industries may be exposed to high levels of dust-borne copper by both inhalation and ingestion routes.

5.2 PRODUCTION, IMPORT/EXPORT, USE, AND DISPOSAL**5.2.1 Production**

Copper occurs naturally in many minerals, such as cuprite (Cu_2O), tenorite (CuO), malachite ($\text{CuCO}_3 \cdot \text{Cu}(\text{OH})_2$), azurite ($2\text{CuCO}_3 \cdot \text{Cu}(\text{OH})_2$), antlerite ($\text{CuSO}_4 \cdot 2\text{Cu}(\text{OH})_2$), brochantite ($\text{CuSO}_4 \cdot 3\text{Cu}(\text{OH})_2$), chrysocolla ($\text{CuO} \cdot \text{SiO}_2 \cdot 2\text{H}_2\text{O}$), chalcopyrite (CuFeS_2), chalcocite (Cu_2S), covellite (CuS), and bornite (Cu_5FeS_4). It also occurs uncombined as solely copper metal (Davenport 2001).

Copper is most commonly present as copper-iron-sulfide and copper sulfide minerals (Schlesinger et al. 2011a). The copper content of ores ranges from 0.5 to 1 or 2% copper (Schlesinger et al. 2011a). Most copper is obtained from Cu-Fe-S ores, such as chalcopyrite and chalcocite, and the principal copper ore mineral is chalcopyrite, which yields a matte of approximately 50% copper (Morris and Wadsley 2001; Schlesinger et al. 2011a).

Mine production of recoverable copper in the United States totaled 1.3 million tons in 2019 (USGS 2020a). In 2015, the recoverable copper content per unit of ore mined was 0.47% (USGS 2017b). The United States is the world's fourth leading copper producer, along with Congo and following Chile, China, and Peru (USGS 2020a). In 2019, copper was actively mined in seven states with Arizona accounting for 68% of U.S. copper production, followed by Utah, New Mexico, Nevada, Montana, Michigan, and Missouri (USGS 2020a). There were 24 copper-producing U.S. mines in 2019, and 15 mines accounted for 99% of production in the United States. Production, processing and use of copper and copper compounds in the United States reported to the EPA's Toxics Release Inventory (TRI), listed by state, are displayed in Table 5-1 and Table 5-2, respectively.

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-1. Facilities that Produce, Process, or Use Copper

State ^a	Number of facilities	Minimum amount on-site in pounds ^b	Maximum amount on-site in pounds ^b	Activities and uses ^c
AK	4	40,000	399,996	1, 10, 12, 13, 14
AL	61	808,228,700	2,282,286,941	1, 2, 3, 5, 7, 8, 9, 10, 11, 12, 13, 14
AR	48	25,378,100	153,781,055	1, 2, 3, 5, 6, 7, 8, 9, 10, 11, 12, 14
AZ	22	2,596,000	25,959,978	1, 3, 5, 6, 7, 8, 9, 11, 12
CA	102	4,811,600	48,116,295	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
CO	11	550,323,000	1,103,229,990	1, 2, 3, 4, 6, 7, 8, 11, 12
CT	40	3,477,000	34,769,961	2, 3, 4, 7, 8, 9, 11, 12, 14
DE	2	1,000	9,999	8
FL	33	50,777,000	107,769,969	1, 2, 3, 5, 6, 7, 8, 9, 10, 11, 12
GA	67	8,364,200	83,642,238	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14
HI	3	200,000	2,000,097	1, 5, 9, 12
IA	46	4,406,300	44,062,956	1, 2, 3, 5, 7, 8, 9, 11, 12, 14
ID	7	241,000	2,409,993	8, 9, 12
IL	139	44,863,100	298,631,064	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
IN	134	18,664,500	186,644,970	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
KS	36	1,599,000	15,990,066	1, 2, 3, 4, 5, 6, 7, 8, 11, 12, 14
KY	60	7,032,200	70,321,941	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
LA	19	761,200	7,612,083	1, 2, 5, 7, 8, 9, 10, 12, 13, 14
MA	54	14,511,100	95,110,951	1, 3, 6, 7, 8, 9, 11, 12, 14
MD	7	222,000	2,219,994	1, 2, 3, 4, 5, 8, 9, 12
ME	7	700,000	6,999,993	8, 9, 12
MI	103	6,541,500	65,415,105	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
MN	63	102,889,300	528,893,041	1, 2, 3, 4, 5, 7, 8, 9, 11, 12, 14
MO	63	6,661,100	66,610,944	1, 5, 6, 7, 8, 9, 10, 11, 12, 14
MS	28	25,991,000	159,909,974	1, 2, 3, 4, 5, 7, 8, 12, 13, 14
MT	1	1,000	9,999	8
NC	83	62,153,300	221,533,020	1, 2, 3, 4, 5, 6, 7, 8, 9, 11, 12, 14
ND	4	111,000	1,109,997	8
NE	20	2,322,000	23,219,982	2, 3, 7, 8, 9, 11, 12, 14
NH	22	4,836,100	48,360,978	1, 2, 3, 5, 7, 8, 9, 11, 12
NJ	30	13,897,000	88,970,071	1, 2, 3, 4, 5, 7, 8, 9, 12
NM	3	20,000	200,097	8, 12
NV	8	52,000	519,993	1, 5, 8, 9, 11, 12
NY	93	13,982,500	139,824,909	1, 2, 3, 4, 5, 7, 8, 9, 10, 11, 12, 14
OH	198	23,512,400	185,124,010	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
OK	61	126,709,100	367,091,045	2, 3, 7, 8, 9, 11, 12, 14
OR	16	481,100	4,811,184	1, 5, 6, 7, 8, 9, 10, 12, 14
PA	196	46,671,200	316,712,019	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-1. Facilities that Produce, Process, or Use Copper

State ^a	Number of facilities	Minimum amount on-site in pounds ^b	Maximum amount on-site in pounds ^b	Activities and uses ^c
PR	14	452,000	4,520,088	7, 8, 9, 11, 14
RI	15	2,361,000	23,609,988	7, 8, 9, 12, 14
SC	63	10,739,400	107,394,039	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
SD	13	353,200	3,531,987	1, 2, 3, 4, 5, 7, 8, 9, 14
TN	64	13,852,000	138,519,936	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
TX	128	85,804,000	358,039,880	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
UT	11	1,452,000	14,519,988	8, 12
VA	32	2,836,100	28,361,070	1, 4, 7, 8, 9, 11, 12, 14
VT	4	121,000	1,209,996	2, 3, 4, 8, 11, 12
WA	25	417,100	4,171,275	1, 2, 3, 5, 6, 7, 8, 9, 11, 12, 13, 14
WI	155	10,012,300	100,122,849	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
WV	4	3,101,000	31,009,995	2, 3, 7, 8
WY	3	120,000	1,199,997	1, 2, 4, 9, 12, 13

^aPost office state abbreviation used.^bAmounts on site reported by facilities in each state,^cActivities/Uses:

- | | | |
|----------------------|-----------------------------|--------------------------|
| 1. Produce | 6. Reactant | 11. Manufacture Aid |
| 2. Import | 7. Formulation Component | 12. Ancillary |
| 3. Used Processing | 8. Article Component | 13. Manufacture Impurity |
| 4. Sale/Distribution | 9. Repackaging | 14. Process Impurity |
| 5. Byproduct | 10. Chemical Processing Aid | |

Source: TRI18 2019; Data are from 2018

Table 5-2. Facilities that Produce, Process, or Use Copper Compounds

State	Number of facilities	Minimum amount on-site in pounds	Maximum amount on-site in pounds	Activities and uses
AK	4	2,110,000	21,099,996	1, 2, 3, 5, 6, 10, 12, 13, 14
AL	65	6,335,200	63,352,062	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
AR	49	2,103,200	21,031,974	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
AZ	28	1,262,064,300	11,020,643,075	1, 2, 3, 4, 5, 6, 8, 9, 10, 11, 12, 13, 14
CA	68	488,300	4,883,148	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14
CO	17	93,100	930,987	1, 2, 4, 5, 7, 8, 10, 12, 13, 14
CT	17	12,464,000	74,639,983	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12
DC	1	10,000	99,999	12
DE	6	100	999	8
FL	39	50,424,200	104,241,978	1, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-2. Facilities that Produce, Process, or Use Copper Compounds

State	Number of facilities	Minimum amount on-site in pounds	Maximum amount on-site in pounds	Activities and uses
GA	59	11,815,100	68,150,974	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 13, 14
IA	38	10,664,000	56,640,280	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
ID	14	562,000	5,619,987	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
IL	83	5,291,500	52,915,428	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
IN	64	26,688,600	166,886,144	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
KS	21	285,000	2,849,985	1, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14
KY	40	3,136,100	31,360,968	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
LA	36	2,801,200	28,011,969	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
MA	8	230,000	2,299,995	1, 2, 3, 4, 5, 7, 8, 11, 14
MD	10	1,040,100	10,400,994	1, 3, 4, 5, 7, 8, 9, 12, 13
ME	1	1,000	9,999	1, 5, 7
MI	59	15,924,200	109,241,950	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
MN	45	1,406,100	14,060,979	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13
MO	48	15,807,100	108,070,969	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14
MS	30	642,000	6,419,988	1, 2, 3, 5, 8, 10, 13, 14
MT	11	11,411,100	64,110,991	1, 2, 3, 4, 5, 6, 8, 9, 10, 12, 13, 14
NC	65	15,285,200	102,852,067	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
ND	6	42,000	419,994	1, 5, 9, 12, 13, 14
NE	18	3,142,100	31,420,989	1, 3, 4, 5, 6, 7, 8, 9, 12, 13, 14
NH	5	1,121,000	11,209,995	1, 3, 5, 6, 7, 8, 9, 11, 14
NJ	15	1,552,100	15,520,986	1, 2, 3, 4, 5, 7, 8, 9, 12, 14
NM	8	11,031,000	60,309,994	1, 3, 4, 5, 8, 11, 12, 13, 14
NV	15	11,462,000	64,620,184	1, 2, 3, 4, 5, 7, 8, 10, 11, 12, 13, 14
NY	26	10,211,200	52,112,083	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14
OH	88	28,510,300	185,103,125	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
OK	31	687,300	6,872,976	1, 2, 3, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14
OR	23	383,100	3,830,985	1, 2, 3, 4, 5, 6, 7, 8, 10, 11, 12, 14
PA	88	56,782,200	167,822,325	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
PR	7	110,000	1,099,998	11, 12
RI	8	412,100	4,120,992	7, 8, 11, 12, 14
SC	36	2656100	26,560,971	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13
SD	8	10,000	99,999	1, 5, 9, 13, 14
TN	51	3,170,200	31,702,257	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
TX	117	165,435,500	704,355,812	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
UT	20	1105373000	10,553,729,981	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
VA	38	1,034,000	10,340,073	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
VT	1	0	0	
WA	21	2,483,100	24,831,180	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-2. Facilities that Produce, Process, or Use Copper Compounds

State	Number of facilities	Minimum amount on-site in pounds	Maximum amount on-site in pounds	Activities and uses
WI	50	3,446,200	34,461,963	1, 2, 3, 4, 5, 6, 7, 8, 10, 11, 12
WV	20	293,100	2,931,084	1, 3, 4, 5, 7, 8, 9, 11, 12, 13, 14
WY	6	211,2000	21,119,994	1, 3, 4, 5, 12, 13, 14

^aPost office state abbreviation used.

^bAmounts on site reported by facilities in each state,

^cActivities/Uses:

- | | | |
|----------------------|-----------------------------|--------------------------|
| 1. Produce | 6. Reactant | 11. Manufacture Aid |
| 2. Import | 7. Formulation Component | 12. Ancillary |
| 3. Used Processing | 8. Article Component | 13. Manufacture Impurity |
| 4. Sale/Distribution | 9. Repackaging | 14. Process Impurity |
| 5. Byproduct | 10. Chemical Processing Aid | |

Source: TRI18 2019; Data are from 2018

Copper from oxidized minerals is usually produced by leaching, solvent extraction, and electrowinning (Schlesinger et al. 2011b). Since most copper comes from Cu-Fe-S ores that are not easily dissolved by aqueous solutions, most extraction occurs by concentration, smelting, and refining (Schlesinger et al. 2011b). This extraction occurs by crushing and grinding the ore and then isolating mineral particles to a concentrate by froth flotation, smelting the concentrate to a matte, oxidizing the matte to impure molten copper, and then fire- and electrorefining the copper (Schlesinger et al. 2011b).

Production of copper in the United States includes not only the processing of both domestic and foreign ores, but also the recovery of scrap. Scrap is a significant part of the U.S. copper supply. There are three types of scrap: home scrap (copper that primary producers cannot further process or sell), old scrap (metal that has been used in products), and new scrap (generated during manufacturing) (Schlesinger et al. 2011c). In 2015, smelting was performed in the United States by three smelters with a combined production of 527,000 metric tons per year (USGS 2017b). During 2015, three refineries produced 1,090,000 metric tons of copper from primary sources and 48,800 from secondary materials (scrap) for a combined total refinery production in the United States of 1,140,000 tons (USGS 2017b). Production of secondary copper amounted to 805,000 metric tons in 2015 (USGS 2017b). In 2019, three smelters, three electrolytic refineries, four fire refineries, and 14 electrowinning facilities operated in the United States (USGS 2020a). Refineries produced 1,000,000 metric tons from ore and 45,000 metric tons from scrap, for a total refinery production of 1,045,000 metric tons.

Copper sulfate is also produced as a byproduct of copper production by ore-leaching with sulfuric acid as the solvent. Production of copper sulfate in the United States increased from 22,800 metric tons in 2011

5. POTENTIAL FOR HUMAN EXPOSURE

to 23,000 metric tons in 2013 but decreased to 18,497 metric tons in 2015 (USGS 2017b). Production figures for other copper compounds are not reported by the USGS.

5.2.2 Import/Export

In 2019, 35,000 metric tons of unmanufactured copper and 650,000 metric tons of refined copper were imported into the United States. (USGS 2020a). Chile, Canada, and Mexico were the principal sources of imported refined copper. Imports of copper sulfate amounted to 43,900 metric tons in 2015 and were primarily obtained from Mexico (USGS 2017b).

In 2019, the United States exported 330,000 metric tons of unmanufactured copper and 140,000 metric tons of refined copper (USGS 2020a). In 2015, copper scrap was the leading U.S. copper export at 426,000 metric tons (USGS 2017b). Exports of copper sulfate amounted to 6,170 metric tons in 2015 (USGS 2017b).

5.2.3 Use

Copper is one of the most important metals used in industries because of its resistance to corrosion, antimicrobial properties, durability, ductility, malleability, and electrical and thermal conductivity. It is used primarily as the metal or in alloys. Its alloys, including brass and bronze, are important commodities (USGS 2009a). Currently American coins are copper alloys (USDT 2018). A small percentage of copper production goes into the manufacture of copper compounds, primarily copper sulfate.

After accounting for production, imports, and exports, 1,800,000 metric tons of copper were available for use in 2019 (USGS 2020a). The Copper Development Association estimates that the end-use distribution of copper and copper alloy products in 2019 were: building construction, 43%; electrical and electrical products, 20%; transportation equipment, 20%; consumer and general products, 10%; and industrial machinery and equipment, 7% (USGS 2020a). The top 10 applications for copper in the United States, in order of percentage of total use, are building wire, plumbing and heating, automotive, air conditioning, refrigeration and natural gas, power utilities, telecommunications, in-plant equipment, ordnance, business electronics, and lighting and wiring devices (Schlesinger et al. 2011b). Copper plumbing is used in water distribution systems (Edwards et al. 2001; EPA 1995; Grace et al. 2012; Knobeloch et al. 1998; Lagos et al. 2001; Rajaratnam et al. 2002; Schock and Sandvig 2009; Turek et al. 2011). Copper and its salts are also used in cookware, kitchen utensils, and mugs; marine antifouling paints; animal feed supplements; fertilizers, fireworks; brake pads; water pipes; roofs; gutters; shingles; wood preservatives; and tires (Banavi et al. 2020; Koo et al. 2020; Lifset et al. 2012; Ni and Li 2008).

5. POTENTIAL FOR HUMAN EXPOSURE

The EPA has registered about 300 copper compounds and alloys as antimicrobial agents (Vincent et al. 2016). Copper-silver ionization filters have been used in hospital water systems to control waterborne pathogens (Huang et al. 2008; Rohr et al. 1999), and copper sulfate is used as an algacide and bactericide in drinking water in the United States (NSF 2021). Since copper's antimicrobial properties make it useful for drinking water treatment and distribution, it also has potential uses for reducing microbial contamination and health care-associated infections by controlling microorganisms in heating ventilation and air-conditioning systems (Arendsen et al. 2019; Vincent et al. 2016). Aside from possible use for controlling contamination and infections, copper has some other uses in medicine and health care. Copper-containing ointments are used in anthroposophical medicine (Gorter et al. 2004). Copper intrauterine devices (IUDs) are commonly used forms of birth control (Gu et al. 2012; Wildemeersch et al. 2014). Copper is also available in multivitamins, dietary supplements, and fortified foods.

Copper and copper compounds have many applications in agriculture, food processing, and production. Copper and copper compounds are registered as fungicides, bactericides, algacides, herbicides, insecticides, and molluscicides for use on almost all food and feed crops (EPA 2009b). Copper can be present in growth stimulants and fertilizers for plants. Copper sulfate is used in land-applied pesticides in United States agriculture, primarily as a fungicide and bactericide for fruits and vegetables, and as a algacide in reservoirs and waterways (Lifset et al. 2012). Industrial applications of copper sulfate include use as an activator in froth flotation of sulfide ores, production of chromated copper arsenate wood preservatives, electroplating, azo dye manufacturing, mordant for textile dyes, petroleum refining and in the manufacture of other copper salts such as copper hydroxide and copper carbonate (Mannsville Chemical Products 1984).

USGS estimates annual agricultural pesticide use in U.S. counties as part of the Pesticide National Synthesis Project. Estimated use for copper and copper compounds pesticides is presented in Table 5-3.

Table 5-3. Estimated Pesticide Use (kg) in the United States from 2013-2017

Compound	Range				
	2013	2014	2015	2016	2017
Copper	345,176– 391,165	393,407– 435,968	416,161– 478,510	528,201– 540,102	435,373– 531,312
Copper hydroxide	2,218,149– 2,378,077	1,867,194– 1,951,160	1,952,598– 2,129,077	1,989,599– 2,101,067	2,063,632– 2,204,163
Copper sulfate	924,911– 1,017,101	1,014,369– 1,077,501	969,716– 1,026,607	931,604– 958,736	1,135,793– 1,270,874
Copper sulfate tribasic	465,364	456,608	601,444	603,385	638,114
Copper oxychloride	142,874– 144,116	116,065– 120,032	214,475– 247,904	206,268– 217,275	257,866– 290,005

Table 5-3. Estimated Pesticide Use (kg) in the United States from 2013-2017

Compound	Range				
	2013	2014	2015	2016	2017
Copper	50,723 –	67,750 –	67,025–	61,052–	10,535 –
oxychloride	136,649	114,027	107,164	100,496	16,516
Copper			10,056 –	11,184 –	12,117 –
octanoate	4,439 – 4,463	7,730 – 7,938	10,179	11,230	12,448

Source: USGS 2017a

Copper is widely used in many applications, and demand is projected to increase. However, as ore grades and natural deposits are depleted, more emphasis may be put on a circular economy of copper and secondary production (Ciacci et al. 2020; Shipper et al. 2018). Under different models to explore the impacts of different futures on global copper supply/demand, demand is estimated to increase by 300-2100% through 2100, depending on population, welfare, and renewable energy development (Schipper et al. 2018). All scenarios result in increased demand that would deplete copper resources (Schipper et al. 2018). While increasing secondary flows and recycling could meet increasing demands and result in a circular economy, most scenarios analyzed by Ciacci et al. (2020) for Europe would not meet greenhouse gas reduction targets unless green technology and equitable lifestyles are emphasized.

5.2.4 Disposal

Based on a review of several papers, it is estimated that 40%-84% of copper in waste materials is recovered, depending on the country (Schlesinger et al. 2011c). The recycling rate in the United States is estimated to be between 29 and 49% (Lifset et al. 2002; Lifset et al. 2012). In 2019, copper in scrap was estimated to contribute about 35% of the U.S. copper supply (USGS 2020a). There are several recycling processes depending on the copper content of scrap material, other metals present in the scrap, and size. Clean, high-grade copper scrap can be re-melted and recovered without further refining, while scrap of lower grade must be refined, often through electrorefining (Samuelsson and Bjorkman 2014). Copper is removed from industrial wastewaters using a variety of processes, including chemical precipitation, ion exchange, membrane filtration, flotation, electrochemical treatment, coagulation/flocculation, and adsorption (Bilal et al. 2013). Copper and copper compounds that are not recycled are disposed of in landfills (Cui and Zhang 2008).

In case of a solid copper sulfate spill on land, the solids should be protected from rain and fire-fighting water by covering the material with plastic sheeting (AAR 1994). In the event of a water spill, the copper sulfate should be neutralized with crushed limestone, slaked lime, or sodium bicarbonate, and the solidified masses should be removed (AAR 1994).

5. POTENTIAL FOR HUMAN EXPOSURE

5.3 RELEASES TO THE ENVIRONMENT

The Toxics Release Inventory (TRI) data should be used with caution because only certain types of facilities are required to report (EPA 2005). This is not an exhaustive list. Manufacturing and processing facilities are required to report information to the TRI only if they employ ≥ 10 full-time employees; if their facility is included in Standard Industrial Classification (SIC) Codes 10 (except 1011, 1081, and 1094), 12 (except 1241), 20–39, 4911 (limited to facilities that combust coal and/or oil for the purpose of generating electricity for distribution in commerce), 4931 (limited to facilities that combust coal and/or oil for the purpose of generating electricity for distribution in commerce), 4939 (limited to facilities that combust coal and/or oil for the purpose of generating electricity for distribution in commerce), 4953 (limited to facilities regulated under RCRA Subtitle C, 42 U.S.C. section 6921 et seq.), 5169, 5171, and 7389 (limited S.C. section 6921 et seq.), 5169, 5171, and 7389 (limited to facilities primarily engaged in solvents recovery services on a contract or fee basis); and if their facility produces, imports, or processes $\geq 25,000$ pounds of any TRI chemical or otherwise uses $> 10,000$ pounds of a TRI chemical in a calendar year (EPA 2005).

Industrial releases such as industrial effluents, mining and production of copper and other metals, municipal solid waste management, and fossil fuel combustion account for a portion of the total environmental releases of copper and copper compounds. Other sources of copper released into the environment include pesticides, marine paints, animal feeds, fertilizers, fireworks, brake pad wear, copper pipe corrosion, leaching from architectural surfaces, releases from treated wood, vehicle fluid leaks, tire wear, wood combustion, biomass burning, and sewage sludge (Lifset et al. 2012; Rauch and Graedel 2007). Natural sources of copper releases include windblown dust, volcanoes, decaying vegetation, forest fires, and sea spray (Georgopoulos et al. 2001; Rauch and Graedel 2007).

5.3.1 Air

Estimated releases of 329,895 pounds (~150 metric tons) of copper to the atmosphere from 2,428 domestic manufacturing and processing facilities in 2018 accounted for about 1.7% of the estimated total environmental releases from facilities required to report to the TRI (TRI18 2020). These releases are summarized in Table 5-4. Estimated releases of 567,357 pounds (~257 metric tons) of copper compounds to the atmosphere from 1,635 domestic manufacturing and processing facilities in 2018 accounted for about 0.3% of the estimated total environmental releases from facilities required to report to the TRI (TRI18 2020). These releases are summarized in Table 5-5.

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-4. Releases to the Environment from Facilities that Produce, Process, or Use Copper

State ^c	RF ^d	Air ^e	Water ^f	UI ^g	Land ^h	Other ⁱ	Reported amounts released in pounds per year ^b		
							Total Release		
							On-site ^j	Off-site ^k	On and off-site
IN	135	19,923	5,283	2,800	1,388,811	3,059,426	85,881	4,390,361	4,476,242
CA	105	4,573	1,552	0	2,581,572	4,995	2,412,938	179,754	2,592,693
TX	126	7,633	2,194	30,324	563,540	1,017,217	536,814	1,084,095	1,620,908
IL	140	25,748	18,172	250	813,374	188,624	39,065	1,007,103	1,046,169
NV	60	43,801	761	0	654,467	113,970	525,538	287,461	812,999
OK	8	49	5	0	770,369	51	769,932	542	770,474
TN	64	3,654	25,500	0	716,475	2,199	363,072	384,755	747,827
WA	198	28,180	3,328	0	297,307	370,411	242,461	456,765	699,226
GA	60	14,216	110	0	647,820	1,496	658,404	5,238	663,642
OH	68	5,329	11,468	0	584,639	23,290	448,491	176,234	624,726
KY	25	2,461	1,755	0	173,940	352,453	163,768	366,842	530,609
NC	152	8,728	1,078	0	290,422	128,664	77,837	351,054	428,891
ID	82	2,677	1,909	0	373,708	4,405	375,817	6,881	382,699
MN	63	3,430	2,722	0	258,960	37,857	60,324	242,644	302,969
NY	63	3,768	3,664	0	249,080	34,993	177,769	113,736	291,505
SC	30	14,420	9,908	0	251,880	3,833	254,090	25,951	280,041
NJ	31	10,663	253	0	128,450	139,768	63,276	215,858	279,134
AR	48	3,916	396	0	231,077	36,074	206,549	64,914	271,463
CO	196	55,002	8,575	1,034	150,460	36,260	100,711	150,620	251,331
VA	61	5,680	34,450	0	149,015	38,223	22,230	205,138	227,369
WI	94	2,498	10,569	0	188,105	23,891	162,896	62,166	225,062
MO	33	6,466	152	52,772	115,277	33,060	172,449	35,278	207,727
LA	7	35	2	0	204,648	1,202	203,628	2,259	205,887
WY	19	1,629	794	1,400	187,299	0	89,556	101,566	191,122
AL	62	3,127	536	0	121,628	24,944	93,710	56,525	150,235
PA	4	14	0	0	139,757	0	139,771	0	139,771

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-4. Releases to the Environment from Facilities that Produce, Process, or Use Copper

State ^c	RF ^d	Air ^e	Water ^f	UI ^g	Land ^h	Other ⁱ	Reported amounts released in pounds per year ^b		
							Total Release		
							On-site ^j	Off-site ^k	On and off-site
FL	13	549	123	0	125,913	12,412	125,887	13,111	138,997
NM	104	8,593	1,066	6,589	59,997	31,700	41,865	66,079	107,944
WV	3	77	0	0	103,692	0	103,769	0	103,769
AK	28	18,977	3,393	0	46,036	10,651	63,439	15,618	79,056
IA	46	3,017	371	0	55,189	7,899	3,102	63,374	66,476
MS	3	0	0	0	64,641	0	64,641	0	64,641
OR	4	1,018	339	0	56,972	275	1,050	57,554	58,603
UT	3	0	0	0	58,482	0	58,482	0	58,482
HI	11	8	13	0	58,305	40	58,012	354	58,366
KS	17	1,704	9	0	44,408	6,412	37,577	14,957	52,534
CT	54	1,195	574	0	33,636	16,731	13,901	38,235	52,136
MI	36	389	74	0	33,064	28	396	33,159	33,555
VT	41	44	448	0	304	21,407	86	22,117	22,203
AZ	20	1,433	44	0	17,332	2,798	15,880	5,727	21,607
MA	4	0	5	0	21,054	2	20,353	708	21,061
PR	22	525	95	19	18,096	348	18,438	645	19,083
NE	14	11,935	3	0	8	4,006	11,935	4,017	15,952
RI	15	260	78	0	1,449	8,500	269	10,018	10,287
NH	22	31	238	0	153	7,140	37	7,525	7,562
ME	7	6	82	0	3,852	69	10	3,998	4,008
SD	13	2,485	11	0	159	46	2,571	130	2,701
MD	7	0	273	0	2	61	0	336	336
DE	2	10	18	0	5	0	10	23	33
ND	4	20	11	0	1	0	28	5	33
MT	1	0	0	0	0	0	0	0	0
Total	2,428	329,895	152,405	95,188	13,034,828	5,807,829	9,088,718	10,331,429	19,420,147

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-4. Releases to the Environment from Facilities that Produce, Process, or Use Copper

Reported amounts released in pounds per year ^b									
State ^c	RF ^d	Air ^e	Water ^f	UI ^g	Land ^h	Other ⁱ	Total Release		
							On-site ^j	Off-site ^k	On and off-site

Source: TRI18 2020; Data are from 2018

RF = Reporting Facilities; UI = Underground Injection

^a The TRI data should be used with caution since only certain types of facilities are required to report. This is not an exhaustive list. Data are rounded to nearest whole number.

^b Data in TRI are maximum amounts released by each facility.

^c Post office state abbreviations are used.

^d Number of reporting facilities.

^e The sum of fugitive and point source releases by a given facility.

^f The sum of on-site surface water discharges, and off-site transfers to wastewater treatment-(metals only), and publicly owned treatment works (POTWs) (metal and metal compounds).

^g The sum of on-site and off-site disposal to underground injection wells (Class I wells and Class II-V).

^h The sum of on-site and off-site disposal to: Resource Conservation and Recovery Act (RCRA) subtitle C landfills, other landfills, RCRA subtitle C surface impoundments, other surface impoundments, land treatment, other land disposal.

ⁱ Includes the sum of off-site transfers to storage only, solidification/stabilization (metals only) disposal, other off-site management, waste broker for disposal, unknown.

^j Total on-site disposal or other releases of the chemical including emissions to air, surface water discharges, land, and underground injection wells.

^k Total amount of chemical transferred off-site for disposal or other releases, including to POTWs

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-5. Releases to the Environment from Facilities that Produce, Process, or Use Copper Compounds

State ^c	RF ^d	Air ^e	Water ^f	UI ^g	Land ^h	Other ⁱ	Reported amounts released in pounds per year ^b		
							Total Release		
							On-site ^j	Off-site ^k	On and off-site
UT	20	40,536	1,351	0	69,016,437	3,206	69,045,478	16,052	69,061,530
AZ	28	123,811	17,201	0	45,689,957	17,474	45,596,152	252,292	45,848,444
MT	11	97,590	0	0	12,633,619	362	12,676,390	55,181	12,731,571
NV	15	1,447	0	0	8,576,085	22	8,577,532	22	8,577,555
AK	4	308	81	0	7,940,479	0	7,940,868	0	7,940,868
AL	65	2,239	4,955	0	5,248,165	32,979	4,909,339	379,000	5,288,339
MO	48	16,388	5,944	0	4,994,977	22,733	4,895,396	144,646	5,040,042
MI	59	8,268	13,963	0	1,899,392	59,217	1,651,526	329,314	1,980,840
OH	88	22,166	20,320	487,459	1,095,825	197,821	981,489	842,102	1,823,591
TX	117	28,722	43,278	95,834	1,216,687	245,388	991,798	638,111	1,629,909
IN	67	27,096	17,031	964	1,453,457	117,998	939,425	677,121	1,616,547
CA	68	1,141	3,901	0	1,601,273	7,163	1,087,899	525,579	1,613,478
TN	51	3,089	16,463	0	1,544,928	5,782	1,332,230	238,032	1,570,263
LA	36	9,620	5,820	2,806	1,409,159	93,215	1,207,486	313,134	1,520,620
PA	85	20,420	3,839	250	1,167,455	92,396	588,139	696,221	1,284,360
IL	83	5,027	21,694	0	849,895	216,132	440,133	652,616	1,092,749
Y	40	3,534	21,247	1	1,011,104	42,012	850,399	227,499	1,077,898
ID	14	1,696	411	0	978,906	3,894	750,660	234,248	984,908
WV	19	2,985	379	0	782,083	4,304	540,062	249,690	789,752
AR	49	6,320	2,503	0	466,070	273,365	381,434	366,823	748,257
WA	21	1,474	410	0	177,795	425,057	90,199	514,537	604,736
NC	66	17,453	1,642	0	539,083	45,820	369,936	234,063	603,999
MS	30	3,754	548	55,212	374,355	9,925	79,235	364,559	443,794
OK	31	1,891	2,248	0	423,369	446	361,074	66,880	427,954
IA	38	7,119	7,514	5	390,669	15,172	129,887	290,591	420,478
OR	24	12,642	1,238	0	329,651	11,690	313,562	41,658	355,221
MN	45	1,164	1,166	0	286,030	3,268	230,781	60,848	291,628

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-5. Releases to the Environment from Facilities that Produce, Process, or Use Copper Compounds

State ^c	RF ^d	Reported amounts released in pounds per year ^b					Total Release		
		Air ^e	Water ^f	UI ^g	Land ^h	Other ⁱ	On-site ^j	Off-site ^k	On and off-site
NY	26	24,424	101,111	0	37,035	121,362	52,962	230,970	283,932
CO	17	5,493	305	0	260,595	0	242,850	23,542	266,393
SC	36	4,628	6,366	1	217,902	35,532	62,427	202,003	264,430
NJ	15	6,006	10,877	0	41,698	194,852	6,007	247,426	253,432
VA	39	4,757	6,149	0	180,582	27,490	126,098	92,880	218,978
GA	60	9,889	29,438	0	123,181	38,475	92,111	108,871	200,983
NE	19	2,994	436	0	188,229	2,065	176,504	17,220	193,724
WY	6	1,842	24	0	189,625	0	138,896	52,595	191,491
ND	6	716	86	3	177,405	2,477	116,263	64,424	180,687
KS	21	1,120	10,184	281	137,951	19,920	107,912	61,543	169,455
WI	49	2,673	6,467	0	145,454	8,457	21,101	141,949	163,050
NM	8	5,864	1,231	0	109,924	40,550	116,798	40,770	157,568
FL	39	643	9,399	0	84,187	12,892	74,270	32,852	107,122
CT	17	3,028	9,150	3,167	51,958	38,748	3,395	102,657	106,052
RI	8	34	428	0	0	44,792	418	44,836	45,254
ME	1	106	160	0	42,985	0	266	42,985	43,251
MD	10	11	78	0	26,451	13,949	19	40,470	40,489
MA	8	1,110	1,516	14,381	7,806	4,633	1,413	28,034	29,447
PR	7	23,970	8	0	703	0	23,978	703	24,681
SD	8	87	0	0	18,444	0	18,392	139	18,531
DC	1	0	0	0	10,103	0	10,103	0	10,103
NH	5	60	434	0	10	41	315	231	545
DE	6	0	0	0	0	0	0	0	0
VT	1	0	0	0	0	0	0	0	0
Total	1,635	567,357	408,995	660,365	174,149,134	2,553,076	168,351,009	9,987,919	178,338,928

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-5. Releases to the Environment from Facilities that Produce, Process, or Use Copper Compounds

State ^c	RF ^d	Air ^e	Water ^f	UI ^g	Land ^h	Other ⁱ	Reported amounts released in pounds per year ^b		
							On-site ^j	Off-site ^k	On and off-site

Source: TRI18 2020; Data are from 2018

RF = Reporting Facilities; UI = Underground Injection

^a The TRI data should be used with caution since only certain types of facilities are required to report. This is not an exhaustive list. Data are rounded to nearest whole number.

^b Data in TRI are maximum amounts released by each facility.

^c Post office state abbreviations are used.

^d Number of reporting facilities.

^e The sum of fugitive and point source releases by a given facility.

^f The sum of on-site surface water discharges, and off-site transfers to wastewater treatment-(metals only), and publicly owned treatment works (POTWs) (metal and metal compounds).

^g The sum of on-site and off-site disposal to underground injection wells (Class I wells and Class II-V).

^h The sum of on-site and off-site disposal to: Resource Conservation and Recovery Act (RCRA) subtitle C landfills, other landfills, RCRA subtitle C surface impoundments, other surface impoundments, land treatment, other land disposal.

ⁱ Includes the sum of off-site transfers to: storage only, solidification/stabilization (metals only) disposal, other off-site management, waste broker for disposal, unknown.

^j Total on-site disposal or other releases of the chemical including emissions to air, surface water discharges, land, and underground injection wells.

^k Total amount of chemical transferred off-site for disposal or other releases, including to POTWs.

5. POTENTIAL FOR HUMAN EXPOSURE

Copper is emitted into the air from both natural and anthropogenic sources. Global atmospheric concentrations and releases of copper from manmade and natural sources have been estimated (Rauch and Graedel 2007). Estimates for the natural and anthropogenic emissions copper from various sources are shown in Table 5-6 and Table 5-7. Based on these data, 6.9×10^7 kg/year of copper from natural sources is estimated to be emitted to the atmosphere.

Table 5-6. Global Emissions of Copper from Natural Sources in the mid-1990s

Source	Emissions (Gg ^a Cu/year)
Windblown dust	50
Sea salt spray	13
Biomass burning	3.3
Agricultural burning	0.14
Volcanic outgassing	2.7

^aOne Gg is one billion (10^9) grams. It is the same as one million (10^6) kilograms.

Source: Rauch and Graedel 2007

Table 5-7. Global Emissions of Copper from Anthropogenic Sources in the mid-1990s

Source	Emissions (Gg ^a Cu/year)
Metal production	18
Nonferrous metal production	18
Iron and steel production	0.14
Fossil fuel combustion	7.1
Metal fabrication	1.4
Metal discard management	0.62

^aOne Gg is one billion (10^9) grams. It is the same as one million (10^6) kilograms.

Source: Rauch and Graedel 2007

Windblown dusts account for an estimated global emission of 5.0×10^7 kg/year of copper into the atmosphere (Rauch and Graedel 2007). Other natural sources of copper emitted into air (in order of highest to lowest worldwide emissions) are sea salt spray, biomass burning, and volcanoes.

Anthropogenic emission sources include nonferrous metal production, fabrication, and use; fossil fuel combustion; metal production; and mining. Lifset et al. (2012) estimates the following emissions to the atmosphere in the United States: fireworks (2.2×10^5 kg/year), copper primary production (4.7×10^5 kg/year), copper waste management (1.9×10^5 kg/year), coal combustion (1.36×10^6 kg/year), oil combustion (4.5×10^5 kg/year), metals production (2.0×10^4 kg/year), and wood combustion (4.0×10^4 kg/year).

The EPA conducted a detailed study of the total amount of copper emitted into the atmosphere (Weant

5. POTENTIAL FOR HUMAN EXPOSURE

1985). The sources of emissions and the estimated quantities of copper emitted in 10^6 kg/year are presented in Table 5-8.

Table 5-8. Copper Emissions into the Atmosphere in 1984

Source	Emissions (10^6 kg/year)
Primary copper smelter	0.042 – 6
Copper and iron ore processing	0.48 – 0.66
Combustion sources	0.045 – 0.36
Primary zinc smelting	0.024 – 0.34
Municipal incinerators	0.0033 – 0.27
Iron and steel production	0.112 – 0.24
Secondary copper smelters	0.16
Gray iron foundries	0.079
Primary lead smelting	0.0055 – 0.065
Copper sulfate production	0.045
Brass and bronze production	0.0018 – 0.036
Carbon black production	0.013
Ferroalloy production	0.0019 – 0.0032

^aOne Gg is one billion (10^9) grams. It is the same as one million (10^6) kilograms.

Source: Weant 1985

Using the ranges of copper emitted from these sources, it is estimated that annual U.S. copper emissions into air are 0.94 to 79.74($\times 10^5$) kg. No recent reports updating these estimates have been found but due to changes in these industries over time, emissions are likely different now.

Daily stack emission rates have been reported for three coal-burning power plants on a kg/day/1,000 megawatt basis (Que Hee et al. 1982); they were 0.3–0.7 and 2.00 kg/day/1,000 megawatt for those using low-sulfur western coal and high-sulfur eastern coal, respectively. This amounted to annual emission rates of 110–260 megawatt for the low-sulfur western coal and 730 kg/1,000 megawatt for the high-sulfur eastern coal.

Emission factors in grams of copper released to the atmosphere per ton of product have been estimated for various industries (Nriagu and Pacyna 1988). These factors would enable estimation of an industry's copper emissions from its production volume. Missing from these emission estimates is fugitive dust arising from drilling, blasting, loading, and transporting operations associated with copper mining. The most common control for reducing fugitive dust is the manual use of water sprays (EPA 1980). The highest concentrations of copper in atmospheric particulate matter were obtained from mining activities, primary and secondary production, and industrial manufacturing (Table 5-8).

Romo-Kröger et al. (1994) were able to show, through the use of radioactive tracers and cluster analysis of inter-elemental correlations, that copper, arsenic, sulfur, and zinc measured near a copper smelter in

5. POTENTIAL FOR HUMAN EXPOSURE

Chile were derived from the plant and not from the surrounding soil. The concentration of copper in air near the plant decreased from 66 to 22 ng/m³ of fine particles and from 131 to 50 ng/m³ of coarse particles during a period of inactivity at the plant, demonstrating the contribution of plant emissions to copper levels in the surrounding area.

Table 5-9. Concentrations of Copper in Particulate Matter (<10 µm) Generated from Various Sources

Source ^a	Median
Metal mining	6.17*
Secondary metal production	4.60*
Primary metal production	3.50*
Industrial manufacturing	2.16*
Steel production	0.55*
Gray iron foundries	0.19*
Steel foundry, general	0.17*
Solid waste	0.09*
Food and agriculture	0.05*
Chemical manufacturing	0.03*
Petroleum industry	0.03*
Gasoline vehicle exhaust	0.05†
Paved road dust	0.0162†
Construction dust	0.0102†
Landfill dust	0.0102†
Unpaved road dust	0.0087†
Agricultural lands, dust	0.0067†
Diesel vehicle exhaust	0.003†

^a Values obtained from CEIDARS 2000

* Data obtained from USEPA Speciate 3.0; Shareef, G.S; Radian, September 1987

† Data obtained from KVB Literature Search

Copper and other pollutants are present in fugitive dust originating from copper production sites or from waste sites. In one study, the amount of airborne copper and other heavy metals deposited near a large refuse dump that received municipal and industrial waste and sewage sludge was determined by first measuring the amount of the metal accumulated in moss bags suspended 1–3 meters above the ground. The deposition rate was then determined from the amount of copper in the moss bags accumulated over the summer of 1985 and compared with that for an agricultural control area. The mean copper deposition rates in the two areas were about the same: 0.55 mg/kg-month (range of 0.04–1.6 mg/kg-month) over the refuse dump and 0.51 mg/kg-month (range of 0.26–0.76 mg/kg-month) in the control area (Lodenius and Braunschweiler 1986). Lodenius and Braunschweiler (1986) concluded that the refuse dump did not contribute to copper concentrations in urban air above normal values.

A study of automobile exhaust emitted from light-duty vehicles conducted in Denver, Colorado showed that this source of copper emission makes a small local contribution to copper in air. The amount of

5. POTENTIAL FOR HUMAN EXPOSURE

copper emitted in exhaust from automobiles powered by regular gasoline has been measured to be 0.001–0.003 mg/mile driven using the Urban Dynamometer Driving Schedule (UDDS) of the Federal Test Schedule (FTS) during the summer of 1996 and the winter of 1997 (Cadle et al. 1999). Diesel-powered vehicles were also studied and found to emit 0.005–0.039 mg of copper per mile driven for vehicles using #2 diesel fuel.

Only in a few cases has the form of copper released into the air been determined. Copper released into the atmosphere can be in particulate matter in the elemental form or in the form of an oxide, sulfate, or carbonate. Because copper smelters co-emit sulfur oxides gases, copper is expected to be released largely as the sulfate in particulate matter from these facilities. Combustion processes are reported to release copper into the atmosphere as the oxide, elemental copper, and adsorbed copper. Cupric oxide has been identified in emissions from steel manufacturing and in fly ash from oil-fired power plants and open-hearth steel mills (Perwak et al. 1980). Copper associated with particles ($\leq 10 \mu\text{m}$) has been suggested to originate from windblown soil and dust (Schroeder et al. 1987). Generally, aerosols from sea spray, dust, and volcanic mineral emissions tend to be larger than particles formed by condensation of gases in the troposphere (Buseck and Posfai 1999).

Copper and copper compounds were detected in air at 19 of the 929 NPL hazardous waste sites where copper had been detected in other environmental media (ATSDR 2019).

In a study of particulate matter emitted by fireworks, Hickey et al. (2020) sampled 10 types of fireworks and found that four of the 12 samples contained copper at concentrations of 12,000 to 53,000 ppm in the PM_{10} size range. Using an emission factor of 3,000 ppm developed by the European Copper Institute, Lifset et al. (2012) estimated that releases from fireworks in the United States increased from 40 metric tons in 1975 to 220 metric tons in 2000.

5.3.2 Water

Estimated releases of 152,405 pounds (~69 metric tons) of copper to surface water from 2,428 domestic manufacturing and processing facilities in 2018 accounted for about 0.8% of the estimated total environmental releases from facilities required to report to the TRI (TRI18 2020). An additional 58,472 pounds (~24 metric tons) were released to publicly owned treatment works (POTWs) (TRI18 2020). These releases are summarized in Table 5-4.

Estimated releases of 408,995 pounds (~186 metric tons) of copper compounds to surface water from 1,635 domestic manufacturing and processing facilities in 2018 accounted for about 0.2% of the estimated total environmental releases from facilities required to report to the TRI (TRI18 2020). An additional

5. POTENTIAL FOR HUMAN EXPOSURE

51,907 pounds (~23 metric tons) were released to publicly owned treatment works (POTWs) (TRI18 2020). These releases are summarized in Table 5-5.

Sources of copper releases to water include algaecides, marine paints, corrosion of metallic copper, architectural uses, chromated copper arsenate (CCA) wood management, industrial effluent, and copper mining leachate (Lifset et al. 2012). Copper and copper compounds were detected in water at 195 of the 929 NPL hazardous waste sites where copper has been detected in environmental media (ATSDR 2019).

Copper is a natural constituent of soil and will be transported into streams and waterways in runoff either due to natural weathering or anthropogenic soil disturbances (Rader et al. 2018). Sixty-eight percent of releases of copper to water is estimated to derive from soil runoff and weathering, while copper sulfate use represents 13% of releases to water and urban runoff contributes 2% (Perwak et al. 1980). In the absence of specific industrial sources, runoff is the major factor contributing to elevated copper levels in river water (Nolte 1988). In the previous EPA National Urban Runoff Program, 86 samples of runoff from 19 cities throughout the United States were analyzed, and copper was found in 96% of samples, at concentrations of 1–100 µg/L (equivalent to ppb) with a geometric mean of 18.7 µg/L (Cole et al. 1984).

Giusti et al. (1993) provided estimates of global anthropogenic and natural copper inputs into oceans that are derived from two sources: atmospheric deposition and riverine input. Atmospheric input has been estimated at $14\text{--}45 \times 10^6$ kg/year for copper in a dissolved form (e.g., rainwater) and $2\text{--}7 \times 10^6$ kg/year for copper in a particulate form (e.g., aerosols). Riverine input is estimated to be 10×10^6 kg/year as dissolved copper and $1,500 \times 10^6$ kg/year as copper bound to particulates.

Domestic wastewater is the major anthropogenic source of copper in waterways (Isaac et al. 1997; Nriagu and Pacyna 1988). Studies in Cincinnati and St. Louis showed discharges of copper into sewer systems from residential areas to be significant, with an average loading of 42 mg/person/day (Perwak et al. 1980). In a more comprehensive review, Jenkins and Russell (1994) reported a range of average copper loadings derived from residential and some small industrial contributions of 2.8–83 mg/person/day. Concentrations of copper in influents to 239 wastewater treatment plants (12,351 observations) were 0.0001–36.5 ppm, and the median value was ~0.4 ppm (Minear et al. 1981). Copper is not entirely removed in POTWs, and releases from these facilities contribute ~8% of all copper released to water (Perwak et al. 1980). Inputs into the Narragansett Bay, Rhode Island, in decreasing order of importance, are sewage effluent, rivers, urban runoff, and atmospheric fallout (Mills and Quinn 1984; Santschi et al. 1984). Ninety percent of both dissolved and particulate copper was from the effluent of sewage treatment plants that discharged into the Providence River.

5. POTENTIAL FOR HUMAN EXPOSURE

While some copper is removed from the waste stream by sewage treatment facilities, considerable copper remains in the effluent and is released into receiving waters (EPA 1981; Perwak et al. 1980). Because removal efficiencies for copper from waste streams tend to remain constant rather than proportional to influent copper concentrations, increases in copper concentrations in POTW influent streams will also result in increased copper concentrations in the effluent streams (Isaac et al. 1997). The copper in domestic wastewater has been found to make up a substantial fraction of the copper found in POTW influent in the wastewater systems of four Massachusetts municipalities. The range of removal efficiencies reported for pilot and full-scale plants suggests that removal depends strongly on plant operation or influent characteristics.

A source of copper released into waterways is from urban stormwater runoff. Copper in stormwater runoff originates from the sidings and roofs of buildings, various emissions from automobiles, and wet and dry depositional processes (Davis et al. 2001). Concentrations of between 1 and 100 µg/L of copper in stormwater runoff have been measured (Georgopoulos et al. 2001). Stormwater runoff normally contributes approximately 2% to the total copper released to waterways. In contrast, copper in runoff that is obtained from the natural weathering of soil or is released from disturbed soils contributes 68% of the copper released to waterways (Georgopoulos et al. 2001).

The best data on typical POTWs using secondary treatment show that 55–90% of copper is removed in these plants with a median and mean removal efficiency of 82% (Perwak et al. 1980). By contrast, those plants using only primary treatment had a 37% median removal efficiency. A more recent study focused on heavy metal removal in three POTWs that received primarily municipal sewage and used activated sludge as a secondary treatment. The study looked at removals in both the primary and secondary treatment stage. The mean removal of soluble copper and total copper after secondary treatment were 49–82 and 83–90%, respectively. The average copper concentration in the final effluent was 17–102 ppb, which would amount to an output of between 0.58 and 3.47 kg of copper into receiving waters per day, based on an effluent volume of 34,000 cubic meters (9 million gallons) per day (Aulenbach et al. 1987; Stephenson and Lester 1987).

Overflow outfalls within combined sewer systems (e.g., combination of domestic and industrial wastewater plus stormwater) are the primary sources of copper pollutants entering estuaries and other coastal areas of the United States (Crawford et al. 1995; Georgopoulos et al. 2001; Huh 1996; Iannuzzi et al. 1997). For example, Crawford et al. (1995) compiled a summary of the sources of various metals and other contaminants into the Newark Bay estuary. The mass loadings of copper into the estuary as a function of source are (in kg/day): discharges from the Passaic Valley Commission and Middlesex

5. POTENTIAL FOR HUMAN EXPOSURE

County Sewerage Authority, 126.5; municipal treatment systems, 103.4; stormwater runoff, 62.2; combined sewer overflows, 48.0; tributary flow, 39.1; and industry direct discharge, 8.82.

Discharges to water from active mining and milling are small, and most of the western U.S. operations do not release any water because water is a scarce resource and is recycled (Perwak et al. 1980). Discharges from electroplating operations are either made directly to the water environment or indirectly via POTWs. Runoff from abandoned mines is estimated to contribute 314 metric tons annually to surface water (Perwak et al. 1980). These discharges are primarily insoluble silicates and sulfides and readily settle out into stream, river, or lake beds. Releases from manufactured products containing copper may be substantial but are difficult to predict. Corrosion of copper in plumbing or construction may result in direct discharges or runoff into waterways. Copper and brass production releases relatively little copper to water.

Wastewater generated from copper mining operations comes from seepage, runoff from tailing piles, or utility water used for mine operation. The amount of wastewater generated ranges from 0–300 L water/metric ton of ore mined for open pit copper mines and 8–4,000 L water/metric ton of ore mined underground (EPA 1980). Copper concentrations in wastewater from a selected open pit and underground copper mine were 1.05 and 0.87 ppm, respectively. Data regarding copper concentrations in wastewater associated with selected concentrating, smelting, and refining operations can be found in EPA (1980). Drainage from mining operations and abandoned mines has been shown to have an effect on copper content in local surface waters with concentrations as high as 69,000 ppb being measured (Rösner 1998).

Results of an EPA industrial effluent survey show that mean and maximum levels of copper in treated wastewater from six industries exceeded 1 and 10 ppm, respectively (EPA 1981). These industries and their mean and maximum discharges in ppm are inorganic chemicals manufacturing (<1.6, 18); aluminum forming (<160, 2,200); porcelain enameling (1.3, 8.8); gum and wood chemicals (1.4, 3.0); nonferrous metals manufacturing (1.4, 27.0); and paint and ink formulation (<1.0, 60.0). Emission factors in nanograms of copper released per L of water outflow have been estimated for various industries. These factors would enable estimation of an industry's copper releases if the discharge volumes were known (Nriagu and Pacyna 1988).

Effluents from power plants that use copper alloys in the heat exchangers of their cooling systems discharge copper into receiving waters (Harrison and Bishop 1984). The largest discharges occur after startup and decrease rapidly thereafter. At the Diablo Canyon Nuclear Power Station, a very high startup discharge containing 7,700 ppb of copper fell to 67 ppb after 24 hours (Harrison et al. 1980). During

5. POTENTIAL FOR HUMAN EXPOSURE

normal operation at two nuclear power stations 6.5×10^6 cubic meters (1,700 million gallons) of seawater per day is used as cooling water for these facilities and discharged into the ocean with copper levels in the effluent ranging between 0.6 and 3.3 ppb (Harrison et al. 1980). This amounts to a total output of copper in the discharged seawater of 3.9–42 kg per day or 1,400–15,000 kg/annum from these two power plants. Except for after start-up of the cooling system, most of the soluble copper (that which passes through a $0.45 \mu\text{m}$ filter) discharged was in bound forms (Harrison et al. 1980). During normal operation, <20% of the copper released was in the <1,000 molecular weight fraction, which contains the more available copper species.

Copper sulfate is added directly to lakes, reservoirs, and ponds for controlling algae. However, the copper concentration in the water column generally returns to pretreatment levels within a few days (Effler et al. 1980; Perwak et al. 1980). The reduction in dissolved copper during this period was accompanied by an increase in particulate copper (e.g., sorption to algae or other organic matter, which settles into the sediments of these bodies of water). The copper in the settled particulates is in equilibrium with the water column, which greatly favors copper in a bound state.

A potential source of copper release into waterways is leachate from municipal landfills. Copper concentrations in leachate obtained from waste sites have been found to vary widely. For example, copper concentrations in leachate from municipal landfills have been found to range from 0.005 to 1,110 ppm (Christensen et al. 1994; Perwak et al. 1980; Roy 1994). Although copper was measured in these leachates, its origin may not be from copper contained within the waste site, but from the surrounding soils. Cyr et al. (1987) reported that leachate from three municipal landfills in New Brunswick, Canada, did not contain copper concentrations significantly above those in control samples representing the surrounding soil types. Therefore, the emissions of copper from landfills into leachates should be made relative to the contribution of copper from surrounding soils, as determined from appropriately selected control samples.

Copper can enter surface waters as a result of agricultural runoff. For example, estimated loading rates of copper into surface water from irrigation water runoff near the Stillwater National Wildlife Refuge ranged from 0.307 to 8.34 mg/hour, depending on what period of the irrigation season samples were taken (Kilbride et al. 1998). The highest loading rates were obtained during the middle period (August through mid-September) of the irrigation season. The copper in the runoff water was found to be predominantly bound to drift material in the water (e.g., algae, vascular plants, invertebrates, vertebrates, and detrital material).

5. POTENTIAL FOR HUMAN EXPOSURE

5.3.3 Soil

Estimated releases of 13,034,828 pounds (~5,912 metric tons) of copper to soils from 2,428 domestic manufacturing and processing facilities in 2018 accounted for about 67% of the estimated total environmental releases from facilities required to report to the TRI (TRI18 2020). An additional 95,188 pounds (~43 metric tons), constituting about 0.5% of the total environmental emissions, were released via underground injection (TRI18 2020). These releases are summarized in Table 5-4.

Estimated releases of 174,149,134 pounds (~78,993 metric tons) of copper compounds (excluding elemental copper) to soils from 1,635 domestic manufacturing and processing facilities in 2018 accounted for about 98% of the estimated total environmental releases from facilities required to report to the TRI (TRI18 2020). An additional 660,365 pounds (~300 metric tons), constituting about 0.4% of the total environmental emissions, were released via underground injection (TRI18 2020). These releases are summarized in Table 5-5.

Copper and copper compounds were detected in soils from 245 of the 929 NPL hazardous waste sites where copper had been detected in environmental media (ATSDR 2019). An estimated 97% of copper released from all sources into the environment is primarily released to land (Perwak et al. 1980). These include primarily tailings and overburdens from copper mines and tailings from mills. The copper in tailings represents the portion of copper that could not be recovered from the ore and is generally in the form of insoluble sulfides or silicates (Perwak et al. 1980). These wastes accumulate in mining states. Other releases to land include sludge from POTWs, municipal refuse, waste from electroplating, iron, and steel producers, discarded copper products (e.g., plumbing, wiring) that are not recycled, fungicides, animal feed, fertilizers, brake pads, vehicle leaks, and tire wear (Lifset et al. 2012; Perwak et al. 1980). The copper content of municipal solid waste is ~0.16%. Much of this waste is landfilled directly or is in the form of residues following incineration. Emission factors in milligrams of copper released per gram of solid waste have been estimated for various industries. These factors would enable estimation of an industry's copper releases in terms of total quantity of solid waste discharged. Sludge from sewage treatment plants is a major source of copper released to land (Nriagu and Pacyna 1988). Agricultural products are believed to constitute 2% of the copper released to soil (Perwak et al. 1980).

5.4 ENVIRONMENTAL FATE**5.4.1 Transport and Partitioning**

Air. Copper is released to the atmosphere in the form of particulate matter or adsorbed to particulate matter. It is removed by gravitational settling (bulk deposition), dry deposition (inertial impaction

5. POTENTIAL FOR HUMAN EXPOSURE

characterized by a deposition velocity), in-cloud scavenging (attachment of particles to rain droplets within clouds), and washout (collision and capture of particles by falling raindrops below clouds) (Schroeder et al. 1987). The removal rate and distance traveled from the source depend on a number of factors, including source characteristics, particle size, turbulence, and wind velocity.

Gravitational settling governs the removal of large particles with mass median aerodynamic (MMA) diameters of $>5\text{ }\mu\text{m}$, whereas smaller particles are removed by the other forms of dry and wet deposition. The importance of wet to dry deposition generally increases with decreasing particle size. The scavenging ratio (ratio of the copper concentration in precipitation [ppm] to its air concentration [$\mu\text{g}/\text{m}^3$]) for large particles displays a seasonal dependence that reflects more effective scavenging by snow than by rain (Chan et al. 1986). Copper from combustion sources is often adsorbed to sub-micron particulate matter. Thermal process may also release copper oxide or elemental copper as a vapor or copper adsorbed to larger particulates (Perwak et al. 1980). Copper adsorbed to sub-micron particles remain in the troposphere for an estimated 7–30 days. In that time, some copper may be carried far from its source (Perwak et al. 1980).

Rates of metal deposition (e.g., depositional fluxes) vary between dry and wet depositional processes and show spatial variability. Dry depositional fluxes of copper tend to be higher in highly urbanized areas and lower in less urbanized areas or areas with minimal anthropogenic activity. For example, average depositional rates were $0.06\text{ mg}/\text{m}^2/\text{day}$ in Chicago, Illinois, $0.007\text{ mg}/\text{m}^2/\text{day}$ in South Haven, Michigan, and $0.01\text{ mg}/\text{m}^2/\text{day}$ 6 to 10 km offshore of Lake Michigan (Paode et al. 1998). Estimated copper deposition rates in urban areas are 0.119 and $0.164\text{ kg per hectare per year (kg/ha/year)}$ or 0.0326 and $0.0449\text{ mg}/\text{m}^2/\text{day}$ for dry and wet deposition, respectively (Schroeder et al. 1987). Bulk deposition reportedly ranges from $0.002\text{--}3.01\text{ kg/ha/year}$ or $0.0005\text{--}0.825\text{ mg}/\text{m}^2/\text{day}$ (Golomb et al. 1997; Landing et al. 1995; Schroeder et al. 1987). For rural areas, the range of bulk deposition reportedly is $0.018\text{--}0.5\text{ kg/ha/year}$ or $0.0049\text{--}0.1\text{ mg}/\text{m}^2/\text{day}$, and wet deposition is 0.033 kg/ha/year or $0.0090\text{ mg}/\text{m}^2/\text{day}$. The washout ratio is 140–751 (Schroeder et al. 1987).

Levels of airborne copper measured at a rural site in Bondville, IL were similar to regional background levels in other urban study sites with only episodic increases, depending on wind speed and direction and location relative to local point sources. In one urban study site (East St. Louis), smelters were the primary source of copper. Copper depositional fluxes followed an exponential decay as one transitions from urban to rural settings (Sweet et al. 1993). Soil was not the major source of copper in cities or nearby rural soils but was the predominant source for copper in the atmosphere over more remote areas (Fergusson and Stewart 1992). However, high copper concentrations in snow and aerosols from polar snowfields and

5. POTENTIAL FOR HUMAN EXPOSURE

remote locations has been attributed to airborne pollution and long-range transport (Annibaldi et al. 2007; Dinu et al. 2020). Sources of copper in urban areas include coal combustion, soil, tire wear, and automobile emissions (Kim and Fergusson 1994). Long-range transported emissions from combustion processes are typically associated with fine particles; however, there can be instances where the highest concentrations of copper are measured in coarse particles near point sources (Paode et al. 1998).

Estimates of depositional velocities for fine particles ($<2.5 \mu\text{m}$) and coarse particles ($2.5\text{--}10 \mu\text{m}$) in urban (Chicago) and rural (Kankalee, Illinois) areas have been made (Pirrone and Keeler 1993). The estimated depositional velocities are urban, $0.25\text{--}0.46 \text{ cm/second}$ and rural, $0.18\text{--}0.25$ for fine particles; and urban, $1.47\text{--}2.93 \text{ cm/second}$ and rural, $0.87\text{--}1.71 \text{ cm/second}$ for coarse particles. The differences in depositional velocities are thought to be due to higher surface roughness and wind velocities in Chicago.

Copper concentrations in particulates formed in a controlled study of waste oil combustion were (in $\mu\text{g/g}$): 687 ± 11 ($10 \mu\text{m}$ diameter), 575 ± 8 ($50 \mu\text{m}$ diameter), 552 ± 12 ($100 \mu\text{m}$ diameter), 568 ± 9 ($300 \mu\text{m}$ diameter), and 489 ± 8 ($500 \mu\text{m}$ diameter). Approximately 25% of copper was in the $10 \mu\text{m}$ fraction and $\sim 18\%$ was in each of the larger fractions (e.g., 50 , 100 , 300 , and $500 \mu\text{m}$ diameter) (Nerín et al. 1999). More recent data on transport were not found.

Water. The average concentrations of copper in Lakes Superior, Erie, and Ontario are 760 , 870 , and 830 ng/L , respectively (Georgopoulos et al. 2001; Nriagu et al. 1996). These values were derived from measurements taken from 11, 11, and 9 nearshore and offshore sampling sites at different points in the water column up to depths of 251 , 55 , and 145 meters for Lakes Superior, Erie, and Ontario, respectively (Nriagu et al. 1996). In Lake Ontario, the highest copper concentrations were found at nearshore sampling sites neighboring Buffalo, New York ($887\text{--}1,051 \text{ ng/L}$), Rochester, New York ($1,041\text{--}1,098 \text{ ng/L}$), and Kingston, Ontario ($921\text{--}1,026 \text{ ng/L}$). The lowest concentrations of copper in Lake Ontario were measured in an offshore sampling site ($540\text{--}710 \text{ ng/L}$) that was approximately 40 km from the Buffalo sampling site.

The atmospheric input of copper into the Great Lakes is $330\text{--}1,470 \text{ ng/m}^2\text{/year}$, which amounts to a total deposition of $8.00\text{--}35.6\times10^{13} \text{ ng/year}$ ($80.0\text{--}356 \text{ kg/year}$). This input of copper accounts for $60\text{--}80\%$ of the anthropogenic input into Lake Superior and $20\text{--}70\%$ into Lakes Erie and Ontario (Georgopoulos et al. 2001; Nriagu et al. 1996). The mean residency times of copper in sediments are estimated to be 15 years in Lake Erie and 101 years in Lake Superior (Georgopoulos et al. 2001; Nriagu et al. 1996).

Much of the copper discharged into waterways is bound to particulate matter and settles out. In the water column and in sediments, copper adsorbs to organic matter, hydrous iron and manganese oxides, and clay.

5. POTENTIAL FOR HUMAN EXPOSURE

In the open water column, a significant fraction of the copper is adsorbed within the first hour of introduction, and in most cases, a steady state is obtained within 24 hours (Harrison and Bishop 1984). Most dissolved copper in POTW effluent and surface runoff is mostly already in complexed form (Sedlak et al. 1997). Copper in wastewater discharged into Back River leading into Chesapeake Bay, Maryland contained 53 ppb of copper, of which 36 ppb (based on weight) were in the form of settleable solids (Helz et al. 1975). The concentration of copper rapidly decreased downstream of the outfall so that 2–3 km from the outfall, the copper concentration had fallen to 7 ppb. The concentration of copper in sediment 2–3 km downstream from the outfall was about a factor of 10 higher than in uncontaminated areas (e.g., Rappahannock River). Based on their data and the results from other studies, Helz et al. (1975) estimated that approximately 200 metric tons of copper entered the Chesapeake Bay from the effluent discharged from waste treatment plants annually. Whitall et al. (2010) concluded that copper released from antifouling paint on boats was a likely source of copper measured in the Choptank river estuary, a tributary of the Chesapeake Bay.

Copper binds primarily to organic matter in estuarine sediment unless the sediment is low in organic matter content. Davies-Colley et al. (1984) determined copper's absorptivity to model phases in artificial seawater in order to estimate copper distributions between estuarine sedimentary phases and water. The model phases included hydrous iron and manganese oxides, clay, aluminosilicates, and organic matter. The binding affinities varied by over a factor of 10,000 and were in the following order: hydrous manganese oxide > organic matter > hydrous iron oxide > aluminosilicates > clay (montmorillonite). The partition coefficients at pH 7 for the more strongly binding phases (manganese oxide, iron oxide, and estuarine humic material), were 6,300, 1,300, and 2,500, respectively. The affinity increased somewhat with pH but did not vary appreciably when the salinity was reduced from 35 to 5‰. Considering the typical compositional characteristics of estuarine sediment in terms of binding capacity, the results indicate that copper binds predominantly to organic matter (humic material) and iron oxides. Manganese oxide contributes only 1% to the binding because of its generally low concentration in sediment; the other phases are usually unimportant. These findings concur with results of selective extraction experiments (Badri and Aston 1983) and studies of the association of copper with humic material (Raspor et al. 1984).

Sediment and Soil. Most copper deposited on soil from the atmosphere, agricultural use, and solid waste and sludge disposal is retained in the upper 5–10 centimeters of soil in comparison to lower soil depths, except in sandy soils where the lability of bound copper is greater (Breslin 1999; Giusquiani et al. 1992; Hutchinson 1979; Luncan-Bouché et al. 1997; Levy et al. 1992; Perwak et al. 1980). Copper's movement in soil is determined by a host of physical and chemical interactions of copper with the soil components. In general, copper will adsorb to organic matter, carbonate minerals, clay minerals, or

5. POTENTIAL FOR HUMAN EXPOSURE

hydrous iron and manganese oxides (EPA 1979; Fuhrer 1986; Janssen et al. 1997; Petruzzelli 1997; Tyler and McBride 1982). Sandy soils with low pH have the greatest potential for leaching. In a laboratory study, Luncan-Bouché et al. (1997) have shown that between 55 and 85% of copper bound to sand (with no other soil components added) is remobilized upon reduction of the pH from 9 to 4. In most temperate soils, the pH, organic matter, concentrations of metal oxyhydroxides, and ionic strength of the soil solutions are the key factors affecting adsorption (Elliot et al. 1986; Fuhrer 1986; Gerritse and Van Driel 1984; Janssen et al. 1997; Rieuwerts et al. 1998; Tyler and McBride 1982). The ionic strength and pH of the soil solution affect the surface charge of soils and thereby influence ionic interaction (Rieuwerts et al. 1998). Soil microorganisms also affect the absorption of copper in soils due to the uptake and assimilation of the metal by these microorganisms (Rieuwerts et al. 1998). However, it is not known how the rate of uptake and absorption capacity of the microorganisms for copper compares with the binding capacity and affinities of copper by organic matter in soils, such as humic and fulvic acids. When the amount of organic matter is low, the mineral content or Fe, Mn, and Al oxides become important in determining the adsorption of copper. Fuhrer (1986) reported that, in oxidized estuarine sediment, adsorption of copper is dominated both by amorphous iron oxide and humic material.

Copper binds strongly to soils with high organic content (14–34% organic matter, dry weight), and the distribution of copper in the soil solution is less affected by changes in pH (within the range of pH normally encountered in the environment) than other metals are (Gerritse and Van Driel 1984). In a laboratory study of competitive adsorption and leaching of metals in soil columns of widely different characteristics, copper eluted in a 0.01 M CaCl₂ leaching solution much more slowly and in much lower quantities than Zn, Cd, and Ni from a low-pH and a high-pH mineral soils and not at all from peat soil, which contained the greatest amount of organic matter (Tyler and McBride 1982). Elliot et al. (1986) investigated pH-dependent adsorption of the divalent transition metal cations cadmium, copper, lead, and zinc in two mineral soils (silty clay loam, 0.5 g/kg organic dry weight, and sandy clay, 1.6 g/kg organic) and two soils containing considerable organic matter (loamy sand, 20.5 g/kg organic, and silt loam, 42.5 g/kg organic). Adsorption increased with pH, and copper and lead were much more strongly retained than cadmium and zinc. Reduction in absorptivity after removal of the organic matter demonstrated the importance of organic matter in binding copper. In a study of clay soils, Wu et al. (1999) observed preferential copper binding to organic matter but found higher binding affinities to fine (<0.2 µm) clay fractions once the organic matter had been removed.

To determine the factors affecting copper leachability in soil, Hermann and Neumann-Mahlkau (1985) performed a study in the industrial Ruhr district of West Germany, which has a high groundwater table (10–80 cm from the surface) and a history of heavy metal pollution. Groundwater samples were taken

5. POTENTIAL FOR HUMAN EXPOSURE

from six locations and two soil horizons, an upper oxidizing loam, and a lower reducing loam. Total copper concentrations were high in the upper soil horizons and low in the lower horizons. Copper showed a pronounced leachability only in the oxidizing environment. In the reducing environment, the mobility was low, possibly due to the formation of sulfides.

The mobility of copper from soils was also found to increase following the introduction of 10–100 mM sodium chloride or calcium magnesium acetate deicing salts into soil (Amrhein et al. 1992). The concentration of sodium chloride or calcium magnesium acetate used in the study approximate those in runoff water produced from the melting of snow along salted roadways.

For concentrations up to 2 mg of copper per liter of water, 25–75% of copper entering POTWs is removed in sludge, much of which is disposed of by spreading on land. Thus, it is useful to ascertain whether copper in sludge is apt to leach into soil. This did not appear to be the case: leachate collected from sludge-amended soil contained <12 ppb of copper (Perwak et al. 1980). Older studies found that small amounts of copper were found in leachate from soils treated with copper-containing sludge, and copper is typically confined to the upper 5–10 cm of soil (Breslin 1999; Davis et al. 1988; Giusquiani et al. 1992; Ritter and Eastburn 1978). In soils receiving long-term, heavy applications of sludge, high copper concentrations (471 mg/kg in comparison to 19.1 mg/kg in unamended control soils) were reported to depths of up to 25 cm (Richards et al. 1998). Brown et al. (1983) found that copper remained in the upper 12.7 cm of soil treated with sewage sludge for a year. The mobility of copper into soil from sludge was found to be determined mainly by the amount of soil organic carbon and soil surface area (Domergue and Védy 1992; Gao et al. 1997). In addition, soils amended by sludge with low metal content were found to have increased sorption of copper due to the increased binding capacity provided by the “low metal” organics in the sludge (Petruzzelli et al. 1994). From the results of other work, the major portion of the copper (40–74%) is expected to be associated with the organic Fe-Mn-oxide and carbonate fractions of most soils (Ma and Rao 1997).

Recent studies on the long-term effects of soil treated with organic amendments such as sludge, manure, and compost, on copper availability have been published. Smolders et al. (2012) found that copper availability in soil treated long-term with organic amendments is lower than that in soil that has been spiked with Cu^{2+} salts because of its lower availability in the original matrix and due to aging reactions. Cagnarini et al. (2021) simulated long-term metal concentrations in soil treated with organic amendments in Switzerland. Copper concentrations have decreased over time and are projected to remain nearly constant or in decline through 2100 (Cagnarini et al. 2021). The model suggests that although

5. POTENTIAL FOR HUMAN EXPOSURE

concentrations of copper in soil treated with sewage sludge are expected to decrease, historic inputs of sewage sludge would result in exceedances of the threshold concentration that would persist through 2100. Copper availability in soil to which stabilized sewage sludge or biosolids has been applied has also been more recently studied; concentrations of copper in biosolid treated clay, calcareous, and sandy soil were significantly higher than in control samples (Mahdy et al. 2007).

Other Media. The bioconcentration factor (BCF) of copper in fish obtained in field studies is 667 in marine fish and 50-200 in freshwater fish, suggesting a low potential for bioconcentration (Perwak et al. 1980). The BCF is higher for mollusks such as hard-shell clams and squid with BCFs of 30,000 and 2.1×10^7 , respectively (Perwak et al. 1980). This may present a major dietary source of copper that could be of concern for those individuals who regularly consume oysters, clams, or squid. Since mollusks are filter feeders and copper concentrations are higher in particulates than in water, this is to be expected (Perwak et al. 1980). For example, a study was conducted with white suckers and bullheads, both bottom-feeding fish, in two acidic Adirondack, New York, lakes (Heit and Klusek 1985). These lakes were known to have received elevated loadings of copper, but the suckers and bullhead had average copper levels of only 0.85 and 1.2 ppm (dry weight) in their muscle tissue. The biomagnification ratio (the concentration of copper in fish compared to that in their potential food sources on a wet weight/wet weight basis) was <1 , indicating no biomagnification in the food chain. The copper content of muscle tissue of fish from copper contaminated lakes near Sudbury, Ontario, did not differ significantly from that of the same fish species in lakes far from this source (Bradley and Morris 1986). In a commercial catfish pond where copper was applied as an algacide, only 0.01% of the copper applied was taken up by the fish (Liu et al. 2006). Similarly, the copper concentration in shrimps in a shrimp farm with high copper bioavailability did not differ from other shrimp populations (Lacerda et al. 2009).

No evidence of bioaccumulation was obtained from a study of various pollutants in the muscle and livers of 10 mammal species in Donana National Park in Spain (Hernandez et al. 1985). The park is impacted by organochlorine compounds and heavy metals emitted from anthropogenic activities that surround the park. For example, the Guadalquivir River that flows through the park first flows through a major mining region in addition to a large urban area and industrial areas, potentially carrying with it contaminants acquired from these sites. The animal species in the study were classified into three categories (herbivorous, omnivorous, and carnivorous) to ascertain if the pollutants were showing biomagnification in higher trophic levels of animals. No evidence of copper biomagnification in the food chain was observed. Likewise, in a study of a food web in a beech tree forest in Northern Germany, there was no evidence of biomagnification in tertiary consumers (e.g., vole, shrew, and mouse) compared to secondary consumers (e.g., earthworm, snail, beetle, and isopod) (Scharenberg and Ebeling 1996). A study of heavy

5. POTENTIAL FOR HUMAN EXPOSURE

metals in cottontail rabbits on mined land treated with sewage sludge showed that, while the concentration of copper in surface soil was 130% higher than in a control area, the elevation was relatively little in foliar samples. No significant increase in copper was observed in rabbit muscle, femur, kidney, or liver. Apparently, copper was not bioaccumulating in the food chain of the rabbit (Dressler et al. 1986).

At the lowest levels of the food chain, there is little evidence of copper bioaccumulation. In a study of copper uptake in earthworms as a function of copper concentration (6–320 mg/kg dry weight) in sludge amended soils, a bioconcentration factor of <1 (0.67) was obtained (Neuhauser et al. 1995). In another example, a study of earthworms and soil from 20 diverse sites in Maryland, Pennsylvania, and Virginia, copper concentrations in earthworms showed a poor correlation with that in soil (Beyer and Cromartie 1987). These results are consistent with the results of another study that also showed no clear correlation between copper concentrations in earthworm tissues and two soils that were heavily contaminated with heavy metals (copper concentrations of 242 and 815 mg/kg dry weight) (Marinussen et al. 1997).

However, there is some evidence in one study for bioconcentration of copper at low copper concentrations in soil. Even though Scharenberg and Ebeling (1996) showed that there was no evidence for biomagnification of copper in a forest food web, their results did show that the total concentrations of copper in the secondary (18.3–192.0 mg/kg dry weight) and tertiary consumers (9.9–17.4 mg/kg dry weight) were higher than the concentrations of the metal in the dominant vegetation (5.3–10.9 mg/kg dry weight) and soil (1.8–5.8 mg/kg dry weight) in the ecosystem.

Diks and Allen (1983) added copper to four sediment/water systems and studied the distribution of copper among five geochemical phases, namely, absorbed/exchangeable, carbonate, easily reducible (Mn-oxides and amorphous Fe-oxides), organic, and moderately reducible (hydrous Fe-oxides). The investigators then attempted to correlate the concentration in each phase with the copper uptake by tubificid worms. Only copper extracted from the manganese oxide/easily reducible phase correlated with the copper content of worms at the 95% confidence level. This result suggests that the redox potential and pH in the gut of the worm is such that manganese oxide coatings are dissolved. The copper in the dissolved manganese oxide phase could be assumed to be soluble and available for uptake by other organisms.

5.4.2 Transformation and Degradation

Air. Data is available on the speciation of copper in airborne particulates. It is generally assumed that metals of anthropogenic origin, especially those from combustion sources, exist in the atmosphere as oxides because metallic species are readily attacked by atmospheric oxidants. As these oxides age,

5. POTENTIAL FOR HUMAN EXPOSURE

sulfurization may occur, but only when SO_x gases are present in the atmosphere in sufficient amount. For example, in Arizona, atmospheric copper oxide levels near copper smelters were strongly correlated with co-emitted sulfur (Schroeder et al. 1987). Copper was primarily bound to organics and sulfides in dry deposition near a smelter in China, and dust from the smelter and in deposition samples showed sulfides and oxides (Liu et al. 2021). Copper has been observed bound to fine aerosol particles as the sulfate and nitrate (Osan et al. 2010). The form of copper in the coarse fraction could be used to trace its source to soil resuspension or brake pad wear erosion (Osan et al. 2010).

In fog water, Cu(II) is reduced to Cu(I) by sulfite, which becomes enhanced by the fact that sulfite is also a ligand of and binds to Cu(I) (Xue et al. 1991). Concentrations of Cu(I) in fog water ranged between 0.1 and 1 μM or, respectively, 4 and >90% of copper in the Cu(I) state. The reduction of Cu(II) to Cu(I) is pH dependent and occurs rapidly at $\text{pHs} > 6$ (Xue et al. 1991).

Water. Free Cu^+ ion is unstable in aqueous solution, tending to disproportionate to Cu^{2+} and copper metal unless a stabilizing ligand is present (EPA 1979; Kust 1978). The only cuprous compounds stable in water are insoluble ones such as Cu_2S , CuCN , and CuF . Therefore, human exposures to copper will predominately be in the form of Cu(II) . Copper in its Cu(II) state forms coordination compounds or complexes with both inorganic and organic ligands. Ammonium and chloride ions can form stable ligands with copper. Copper also forms stable complexes with organic ligands such as humic acids, binding to $-\text{NH}_2$ and $-\text{SH}$ functional groups and, to a lesser extent, with $-\text{OH}$ functional groups. Copper binding to humic and fulvic substances appears as both ionic binding and chelation. Natural waters contain varying amounts of inorganic and organic species. This affects the complexing and binding capacity of the water and the types of complexes formed. In seawater, organic matter is generally the most important complexing agent (Coale and Bruland 1988). In water, the presence of ligands may affect other physicochemical processes such as adsorption, precipitation, and oxidation-reduction (EPA 1979). More specific information on the transformation and degradation of copper in its cupric [Cu(II)] and cuprous [Cu(I)] states is given below.

At the pH values and carbonate concentrations characteristic of fresh surface waters, most dissolved Cu(II) exists as carbonate complexes rather than as free (hydrated) cupric ions (Stiff 1971).

Based on the results of a theoretical model, the major species of soluble copper found in freshwater, seawater, and a 50:50 combination of the freshwater and seawater over a pH range of 6.5–7.5 is Cu^{2+} , $\text{Cu}(\text{HCO}_3)^+$, and $\text{Cu}(\text{OH})_2$ (Long and Angino 1977).

5. POTENTIAL FOR HUMAN EXPOSURE

The concentration of dissolved copper depends on factors such as pH, the oxidation-reduction potential of the water, and the presence of competing cations (Ca^{2+} , Fe^{2+} , Mg^{2+} , etc.), anions (OH^- , S^{2-} , PO_4^{3-} , CO_3^{2-}), and soluble cupric-organic and -inorganic complexing agents. If the combination of a particular anion with copper forms an insoluble salt, precipitation of that salt will occur. The most significant precipitate formed in fresh surface waters is malachite ($\text{Cu}_2[\text{OH}]_2\text{CO}_3$) (Sylva 1976). Other important precipitates are $\text{Cu}(\text{OH})_2$ (and ultimately CuO) and azurite ($\text{Cu}_3[\text{OH}]_2[\text{CO}_3]_2$). In anaerobic waters, Cu_2S , Cu_2O , and metallic copper forms and settles out (EPA 1979). The combined processes of complexation, adsorption, and precipitation control the level of free $\text{Cu}(\text{II})$ in water. The chemical conditions in most natural water are such that, even at relatively high copper concentrations, these processes will reduce the free $\text{Cu}(\text{II})$ ion concentration to extremely low values.

As a result of the previously described physico-chemical processes, copper in water may be dissolved or associated with colloidal or particulate matter. Copper in particulate form includes precipitates, insoluble organic complexes, and copper adsorbed to clay and other mineral solids. In a survey of nine rivers in the United Kingdom, 43–88% of the copper was in the particulate fraction (Stiff 1971). A study using suspended solids from the Flint River in Michigan found that the fraction of adsorbed copper increased sharply with pH, reaching a maximum at a pH of 5.5–7.5 (McIlroy et al. 1986).

The soluble fraction of copper in water is usually defined as that which will pass through a $0.45\ \mu\text{m}$ filter. It includes free copper and soluble complexes as well as fine particulates and colloids. The soluble fraction may be divided according to the lability (e.g., the relative ability of the copper to dissociate from the bound form to the free ion) of the copper forms in the water. Categories range from the very labile metal (e.g., free metal ion, ion pairs, inorganic or organic complexes) to slowly or nonlabile metal (e.g., colloiddally bound to inorganic colloidal phases of other metals such as $\text{Fe}(\text{OH})_3$ or FeOOH , or bound to high molecular weight organic material) (Tan et al. 1988). For example, in a typical study, 18–70% of dissolved copper in river water was labile and 13–30% was slowly labile (Tan et al. 1988). Various techniques may be used to classify the lability of different fractions of soluble copper; these techniques include solvent extraction, ion-specific electrodes, ion exchange, ultrafiltration, electrochemical methods such as anodic stripping voltammetry, and gel filtration chromatography (Harrison and Bishop 1984). Newer technologies include hyphenated ICP-MS (Agilent Technologies 2012). The resulting classification depends on the specific procedure employed. Therefore, a comparison of the results of different researchers should be done in general terms.

The nature of copper's association with inorganic and organic ligands will vary depending on the pH, copper concentration, concentration of competing ligands, binding capacity of the ligands, and hardness

5. POTENTIAL FOR HUMAN EXPOSURE

or salinity of the water (Breault et al. 1996; Cao et al. 1995; Gardner and Ravenscroft 1991; Giusti et al. 1993; Lores and Pennock 1998; Town and Filella 2000). In river water from the northwestern United States that had a relatively high pH (7.0–8.5) and alkalinity (24–219 ppm as CaCO_3), inorganic species like CO_3^{2-} and OH^- were the most important ligands at high copper concentrations (McCrady and Chapman 1979). However, other species such as organic compounds were important at low copper concentrations. On the other hand, copper in samples from surface water of lakes and rivers in southern Maine with a relatively low pH (4.6–6.3) and alkalinity (1–30 ppm as CaCO_3) was largely associated with organic matter (Giesy et al. 1978). The binding of copper to dissolved organics was found to be dependent on the specific organic chemical species (e.g., fulvic acid) and their concentrations in the surface water, the number of available binding sites per fulvic acid carbon, and the hardness of the water (Breault et al. 1996). Increasing water hardness results in decreased fulvic acid binding sites. This effect is due more to the depression of the solubility of high molecular weight fulvic acid in the presence of Ca and Mg ions than to competition of these ions with copper for fulvic acid binding sites. Changing pH from 8 to 6 resulted in a 7-fold increase in the binding constant for Cu(II) with humic acid (Cao et al. 1995).

The extent to which copper binds to inorganic and organic ligands can be altered by materials carried in runoff. For example, after a period of rain in southeastern New Hampshire, inorganic constituents contributed more to copper binding in lakes and rivers than did dissolved organic matter (Truitt and Weber 1981). A green precipitate, confirmed to be malachite ($\text{Cu}_2[\text{OH}]_2\text{CO}_3$), was formed in river water in Exeter, NH. The water had a high alkaline pH (7.4) with 43.5 mg/L CaCO_3 as a buffering agent that was higher than six other surface waters (e.g., three rivers, two reservoirs, a pond, and a swamp) with pH values of 5.7–7.4 and 1.7–41 mg/L, respectively. A computer simulation of the copper species in water of a pond and water obtained from an artesian well that fed the pond predicted that 98% of the copper in the artesian well water would exist as the free copper ion (Cu^{+2}), whereas 88 and 63% of the copper in pond water would be bound to organics in the spring and fall, respectively (Giesy et al. 1983). These estimates were based on experimentally determined binding capacities of the organic matter in the two water sources and stability constants for the copper-organic matter complexes.

Seawater samples obtained in a transect of the uppermost Narragansett Bay in August 1980 were analyzed for dissolved, particulate, and organically bound copper to investigate the geochemistry of copper-organic complexes (Mills and Quinn 1984). Narragansett Bay is a partly mixed estuary in Massachusetts and Rhode Island that receives organic matter and metals from rivers, municipal and industrial effluents, and from runoff. The Fields Point waste treatment facility accounts for 90% of the copper input into the bay through the Providence River with dissolved copper representing 60% of the

5. POTENTIAL FOR HUMAN EXPOSURE

total copper input. The concentrations of dissolved and organic copper ranged from 16.4 and 2.3 $\mu\text{g/kg}$ in the Providence River to 0.23 and 0.12 $\mu\text{g/kg}$ in Rhode Island Sound. Particulate copper concentrations in Narragansett Bay ranged from 0.06 to 2.42 $\mu\text{g/kg}$ and generally comprised 40% of the total copper in the bay. Analysis of the data indicated that ~75% of the dissolved copper that enters the bay from the Providence River is removed within the bay.

Organic ligands can contain a variety of binding sites, and the strength of the resulting copper complexes will vary accordingly. Over 99.7% of the total dissolved copper in ocean surface water from the northeast Pacific was associated with organic ligands (Coale and Bruland 1988). The dominant organic complex, limited to surface water, was a strong ligand of biological origin. A second, weaker class of organic ligand was of geologic origin. An independent study showed that copper binds to humic material at a number of sites. The binding strength of the sites varied by two orders of magnitude (Giesy et al. 1986). The humic material in this study was derived from nine surface waters in the southeastern United States. Soluble copper in water discharged from a nuclear power station was primarily complexed with organic matter in the 1,000–100,000 molecular weight range (Harrison et al. 1980). Ten to 75% of the discharged copper was in particulate form.

The bioavailability of Cu(I) is difficult to access due to its thermodynamic instability in the environment (Xue et al. 1991). Cu(I) is a reactive reducing agent, and its concentrations in the environment is typically determined both by its reaction with oxygen and other oxidants in the aqueous environment to form Cu(II) and its rate of production through the reaction of Cu(II) with reducing agents (Sharma and Millero 1988). Investigators have shown the presence of Cu(I) in seawater, which is thought to occur through the reduction of Cu(II) to Cu(I) by photochemical processes (Moffett and Zika 1987; Xue et al. 1991). The detection of Cu(I) in seawater is likely the result of the stabilization of Cu(I) through complex formation with chloride ions. Cu(II)-organic complexes absorb radiation at wavelengths $>290\text{ nm}$ and can undergo charge transfer reactions where the Cu(II) is reduced and a ligand is oxidized. Photochemically-generated reducing agents such as O^{2-} and H_2O_2 in the surface water of oceans and possibly other natural waters (e.g., lakes) may contribute to the reduction of Cu(II) to Cu(I) in these waters (Moffett and Zika 1987; Sharma and Millero 1988).

Cu(I) concentration is highest in the surface layer of seawater, and the hydrogen peroxide concentration increases in parallel to that of Cu(I) (Moffett and Zika 1987). In addition, the percentage of free Cu(I) is highest on the surface. Sharma and Millero (1988) measured the rate of Cu(I) oxidation in seawater as a function of pH, temperature, and salinity. The rate of reaction increased with pH and temperature and decreased with increasing ionic strength (or higher salinity) (Sharma and Millero 1988). The results

5. POTENTIAL FOR HUMAN EXPOSURE

suggested that the rates are controlled by Mg^{2+} , Ca^{2+} , Cl^- , and HCO_3^- through their involvement in complex formation and ligand exchange (Sharma and Millero 1988).

Sediment and Soil. The adsorption of copper to soil and sediment was discussed in Section 5.4.1 under transport and partitioning. It is important to understand the transport and fate of copper and its compounds in soils and sediments because these compartments tend to be large reservoirs of copper and could have an impact on human exposures. Copper concentrations in drinking water obtained from groundwater can be affected by the leaching of copper from soil. Reservoir sediments have been shown to be sources of copper in drinking water (Georgopoulos et al. 2001). Although much of the copper is bound to inorganic or organic matrices in soils and sediments, there is the potential for release of copper into pore water within soils and sediments depending on soil conditions and the forms of the copper present. There is evidence to suggest that copper binding in soil is correlated with pH, cation exchange capacity, the organic content of the soil, the presence of manganese and iron oxides, and even the presence of inorganic carbon such as carbonates (Petrizzelli 1997; Rieuwerts et al. 1998). At pH levels above 5, absorption of copper from pore water onto soil components becomes a significant process, whereas at pH levels below 5, copper largely remains in pore water and is, therefore, mobile in soil (Perwak et al. 1980). However, broad generalizations about the mobility of copper in soils are not possible since the situation will differ among different soil types and environmental conditions. More specific information on the lability (e.g., extractability) of copper from differing soils and conditions is given below.

There are several ways for determining the forms of copper in soil, the most common method being the measuring of the extractability of the copper with different solvents. Extractability is a function of the nature of the soil and the form of copper deposited in the soil. If a relatively labile form of copper is applied, binding to inorganic and organic ligands can occur, as well as other transformations. The capacity of soil to remove copper and the nature of the bound copper were evaluated by incubating 70 ppm of copper with 5 g samples of soil for 6 days (King 1988). Twenty-one samples of soils (10 mineral and 3 organic) from the southeastern United States were included in the study. Some soil samples were taken from the subsoil as well as the surface. The amount of adsorbed copper ranged from 36 to 100%, of which 13–100% was nonexchangeable when extracted with KCl. Removal of copper from solution was much higher with surface soils than with subsurface sandy soils; 95–100% of the copper was removed by five of the mineral surface soils and all three organic soils. The percentage of copper that was nonexchangeable was relatively high in all but some of the acid subsoils. While the fraction of exchangeable copper was not dependent on pH in surface soils, 96% of the variation in exchangeability was correlated with pH in subsoils. The soil/water partition coefficient for copper was >64 for mineral soils and >273 for organic soils. Of the 8 heavy metals in the study, only lead and antimony had higher

5. POTENTIAL FOR HUMAN EXPOSURE

partition coefficients than copper. Most of the copper in Columbia River estuary sediment and soil was associated with inorganic carbon (e.g., carbonate), but not with the amount of extractable Fe or the organic carbon content of the sediment (Fuhrer 1986).

The amount of ammonium acetate- and DTPA-extractable copper in wetland soil/sediment resulting from atmospheric deposition from smelters in Sudbury, Ontario showed the same pattern as total copper, despite random variations in soil pH, redox potential, and organic carbon (Taylor and Crowder 1983). Therefore, in this case, soil characteristics were not the dominant factors determining extractability and availability, but rather the form of copper that was deposited. The median concentrations of total copper, ammonium acetate-extractable copper, and DTPA-extractable copper at 25 sample sites were 371, 49, and 98 ppm, respectively.

In another study of copper partitioning in nine different contaminated soils, sequential extractions were used to operationally define six soil fractions in decreasing order of copper availability: water soluble >exchangeable >carbonate >Fe-Mn oxide >organic >residual (Ma and Rao 1997). The results of this study showed that the distribution of copper in these six soil fractions differed depending on the total copper concentration in the soil. As the copper concentration increased above 240 mg/kg, between 69 and 74.4% of the total copper was found in the water soluble, carbonate, Fe-Mn oxide, and organic fractions. In relatively uncontaminated soils (<240 mg/kg copper), between 97.6 and 99.6% of the copper was found to be associated with the residual fraction.

In estuarine environments, anaerobic sediments are known to be the main reservoir of trace metals. Under anaerobic conditions, Cu(II) salts will reduce to Cu(I) salts. The precipitation of cupric sulfide and the formation of copper bisulfide and/or polysulfide complexes determine copper's behavior in these sediments (Davies-Colley et al. 1985). In the more common case where the free sulfide concentration is low due to the controlling coexistence of iron oxide and sulfide, anaerobic sediment acts as a sink for copper, that is, the copper is removed from water and held in the sediment as an insoluble cuprous sulfide. However, in the unusual situation where the free sulfide concentration is high, soluble cuprous sulfide complexes may form, and the copper concentration in sediment pore water may then be high.

In sediment, copper is generally associated with mineral matter or tightly bound to organic material (Kennish 1998). As is common when a metal is associated with organic matter, copper generally is associated with fine, as opposed to coarse, sediment. Badri and Aston (1984) studied the association of heavy metals in three estuarine sediments with different geochemical phases. The phases were identified by their extractability with different chemicals and termed easily or freely leachable and exchangeable;

5. POTENTIAL FOR HUMAN EXPOSURE

oxidizable-organic (bound to organic matter); acid-reducible (Mn and Fe oxides and possibly carbonates); and resistant (lithogenic). In the three sediments, the nonlithogenic fraction accounted for ~14–18% of the total copper and the easily exchangeable component was 5% of the total copper. In addition, the compositional associations of copper in sediment samples taken from western Lake Ontario were analyzed employing a series of sequential extractions (Poulton et al. 1988). The mean (\pm standard deviation) percentages of copper in the various fractions were exchangeable, 0 ± 0 ; carbonate salt, 0.1 ± 0.3 ; iron or manganese oxide-bound, 0.2 ± 0.3 ; organic-bound, 40 ± 11 ; and residual, 60 ± 8 . Another study found that 10–20% of the copper in Lake Ontario sediment samples was bound to humic acids, with virtually all of the copper bound to organic matter (Nriagu and Coker 1980). The concentration of copper associated with humic acids was 21–40 times greater than in the sediment as a whole.

Other Media. Copper is an essential nutrient for plant growth and metabolism. Therefore, uptake of copper from soil by plants through the roots is a natural and necessary process, actively regulated by the plant (Clemens 2001). However, loss of biodiversity has been reported in environments contaminated with copper. Naveed et al. (2014) found that increasing copper pollution resulting from a former wood preservation plant had a negative impact on plant growth and species. Earthworms, bacteria, nematodes, and fungi showed a similar response to increasing copper concentrations. Results of this study showed that there was a 10% loss in soil biodiversity within a copper concentration range of 110 to 800 mg/kg (Naveed et al. 2014).

The uptake of copper into plants is dependent on the concentration and bioavailability of copper in soils. The bioavailability of copper is determined largely by the equilibrium between copper bound to soil components and copper in soil solution. As noted in the discussion of copper binding in soils, this is determined by copper concentrations in soil, soil type, soil components, pH, oxidation-reduction potential of the soil, concentrations of other cations and anions in the soil, etc. (Rieuwerts et al. 1998). Other factors involved root surface area, plant genotype, stage of plant development, weather conditions, interaction with other nutrients in the soil, and the water table (Gupta 1979). Using lime (calcium carbonate) to adjust soil pH is another factor that affects copper uptake. For example, liming acidic soils can increase copper uptake in hay, but decrease copper uptake in wheat (Gupta 1979). However, the effect of liming on increasing soil pH does not appear to be the overriding factor behind the changes in copper uptake by plants, even though there is evidence that the addition of lime to soil to increase the pH to 7 or 8 reduces copper bioavailability to some plants (Perwak 1980). This is evidenced by the fact that changes in pH (5.4–8.0) have little effect on copper concentrations in plant tissues (Gupta 1979).

5. POTENTIAL FOR HUMAN EXPOSURE

It appears that microorganisms are able to transform copper and affect the copper bioavailable for plant uptake (Mulder and van Veen 1968). Hydrogen sulfide (H₂S) forming microorganisms may be involved in soil copper precipitation as nearly insoluble sulfide salts. Bacteria of the genera *Thiobacillus* and *Ferrobacillus* are able to oxidize *CuS* to *CuSO₄*. Johnson et al. (2017) carried out experiments to study the redox transformation of copper by acidophilic bacteria and found that oxidation and reduction of copper were mediated by acidophilic bacteria indirectly. Copper (I) accumulated in aerobic cultures of sulfur-grown *Acidithiobacillus* spp. More copper (I) was produced by *At. Calvus* than by the other species. Reduction of copper (II) by aerobic cultures of sulfur-grown *Acidithiobacillus* spp. Was more pronounced as culture pH declined. *Acidithiobacillus* grown anaerobically on hydrogen and *Acidiphilium cryptum* grown micro-aerobically on glucose only reduced copper (II) when iron (III) was included. Copper (I) was only oxidized by growing cultures of *Acidithiobacillus* spp. When iron (II) was included.

5.5 LEVELS IN THE ENVIRONMENT

Reliable evaluation of the potential for human exposure to copper depends, in part, on the reliability of supporting analytical data from environmental samples and biological specimens. Concentrations of copper in unpolluted atmospheres and in pristine surface waters are often so low as to be near the limits of current analytical methods. In reviewing data on copper levels monitored or estimated in the environment, it should also be noted that the amount of chemical identified analytically is not necessarily equivalent to the amount that is bioavailable.

Table 5-9 shows the limit of detections typically achieved by analytical analysis in environmental media. Presented in Table 5-10 is a summary of the range of concentrations detected in environmental media at NPL sites.

Table 5-10. Lowest Limit of Detection for Copper Based on Standards^a

Media	Detection limit	Reference
Metal and nonmetal dust on MCE filters in workplace	0.07 µg/sample ^b	NIOSH 2020; Method 7302, Issue 1
Metal and nonmetal dust on PVC filters	0.08 µg/sample ^b	NIOSH 2020; Method 7304, Issue 1
Biological tissues (nail, liver, lungs, etc.)	6 µg/g ^c	NIOSH 2020; Method 8200, Issue 1
Water, wastewater, and solid wastes	5.4 mg/L ^d	EPA 1994a; Method 200.7
Drinking water	0.2 µg/L ^e	EPA 2003; Method 200.5
Ground waters, surface waters and drinking water	0.01-0.5 µg/L 0.2 mg/kg ^f	EPA 1994b; Method 200.8
Ground water, surface water, drinking water, storm runoff, industrial and domestic wastewater	0.7 µg/L ^g	EPA 1994c; Method 200.9

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-10. Lowest Limit of Detection for Copper Based on Standards^a

Media	Detection limit	Reference
Air	0.00001 µg/L ^h	EPA 2020b
Food	6.02 µg/kg ^f	FDA 2020
Serum	2.5 µg/dL ⁱ	CDC 2018

^aDetection limits based on using appropriate preparation and analytics. These limits may not be possible in all situations.

^bInductively Coupled Argon Plasma, Atomic Emission Spectroscopy (ICP-AES)

^cInductively-Coupled Plasma Atomic Emission Spectroscopy (ICP-AES)

^dInductively-Coupled Plasma Atomic Emission Spectrometry (ICP-AES)

^eAxially viewed inductively coupled plasma-atomic emission spectrometry (AVICP-AES)

^fInductively Coupled Plasma – Mass Spectrometry

^gGraphite Furnace Atomic Absorption (GFAA)

^hInductively Coupled Plasma – Mass Spectrometry or X-ray Fluorescence

ⁱInductively coupled plasma dynamic reaction cell mass spectrometry (ICP-DRC-MS)

Table 5-11. Copper Levels in Water, Soil, and Air of National Priorities List (NPL) Sites

Medium	Median	Geometric mean	Geometric standard deviation	Number of quantitative measurements	NPL sites
Water (µg/L)	2.40x10 ²	371	16.2	357	195
Soil (mg/kg)	4.10x10 ²	431	17.4	462	245
Air (µg/m ³)	0.293	0.915	86.6	27	19

^aConcentrations found in ATSDR site documents from 1981 to 2019 for 1,867 NPL sites (ATSDR 2019). Maximum concentrations were abstracted for types of environmental media for which exposure is likely. Pathways do not necessarily involve exposure or levels of concern.

5.5.1 Air

Human exposure to copper in air comes from both natural and anthropogenic sources. The concentrations of copper in air can be higher in the proximity of major sources such as smelters, mining operations, and combustion sources (e.g., power plants, incinerators, automobiles, etc.). Data from EPA's Air Quality System (AQS) for the years 2016 through 2019 are reported in Table 5-12. Most monitors are in California and a few others have been located in Michigan in varying years including three in 2016, six in 2017, two in 2018, and two in 2019. Based on these data, the general population is expected to be exposed to copper concentrations in air below 0.8 µg/m³.

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-12. Percentile Distribution of Annual Mean Copper (TSP) Concentrations ($\mu\text{g}/\text{m}^3$) Measured in Ambient Air at Locations Across the United States

Year	Number of U.S. locations	25 th	50 th	75 th	95 th	Maximum
2016	17	0.021	0.027	0.035	0.051	0.208
2017	19	0.020	0.030	0.057	0.289	0.792
2018	15	0.022	0.024	0.031	0.054	0.066
2019	15	0.013	0.018	0.020	0.045	0.047

TSP = Total suspended particles

Source: EPA 2020a

One recent study found that the mean concentration of copper in ambient air from 13 U.S. cities was $0.005 \mu\text{g}/\text{m}^3$, and concentrations ranged from 0.002 to $0.006 \mu\text{g}/\text{m}^3$ (Chen and Lippmann 2009). The results of several studies in which concentrations of copper in air were reported are described below and summarized in Table 5-13. It should be noted that older data may not be representative of current concentrations, given the reduction of ambient air pollution in the United States.

Table 5-13. Outdoor Air Monitoring Data for Copper

Location(s)	Geographic type	Date(s)	Mean concentration (ng/m^3)	Notes	Reference
United States	Urban	1977	207.5	4,648 samples ^a	EPA 1984
United States	Urban	1978	200.8	3,615 samples ^a	
United States	Urban	1979	259.3	2,507 samples ^a	
United States	Nonurban	1977	193.2	709 samples ^a	
United States	Nonurban	1978	265.7	458 samples ^a	
United States	Nonurban	1979	141.7	235 samples ^a	
Smokey Mountain National Park	Remote	1979	1.6	Above canopy, crustal enrichment factor 31	Davidson et al. 1985
Olympic National Park	Remote	1980	5.6	Crustal enrichment factor 76	
Camden, NJ	Urban	Summer 1981 & 82	16.0-18.0 ^b		Liroy et al. 1987
Elizabeth, NJ	Urban	Summer 1981 & 82	21.0-29.0 ^b		
Newark, NJ	Urban	Summer 1981 & 82	25.0-33.0 ^b		
Ringwood, NJ	Rural	Summer 1981 & 82	13.0-63.0 ^b		
Camden, NJ	Urban	Winter 1982 & 83	17.0-21.0 ^b		
Elizabeth, NJ	Urban	Winter 1982 & 83	28.0-36.0 ^b		
Newark, NJ	Urban	Winter 1982 & 83	21.0-27.0 ^b		
Ringwood, NJ	Rural	Winter 1982 & 83	6.0-18.0 ^b		

^aSamples from National Survey

Table 5-13. Outdoor Air Monitoring Data for Copper

Location(s)	Geographic type	Date(s)	Mean concentration (ng/m ³)	Notes	Reference
-------------	-----------------	---------	---	-------	-----------

^bConcentrations reported by Liroy et al. (1987) are geometric means.

Davies and Bennett (1985) reported average atmospheric copper concentrations of 5–50 ng/m³ in rural areas and 20–200 ng/m³ in urban locations. Data from many urban locations in the United States show concentrations of copper associated with particulate matter ranging from 3 to 5,140 ng/m³ (Schroeder et al. 1987). Remote and rural areas have concentrations of 0.029–12 and 3–280 ng/m³, respectively (Schroeder et al. 1987). In remote areas such as national parks, differences in copper concentrations have been attributed to greater vegetative cover and higher moisture and larger amounts of exposed rock and soil (Davidson et al. 1985). Copper follows the same pattern as other heavy metals, in that increased copper levels are present in urban areas in winter and in rural areas in summer (Evans et al. 1984; Liroy et al. 1987).

Anderson et al. (1988) performed a study of the atmospheric aerosols collected at a site in Chandler, Arizona. Several major copper smelters are located ~120 km to the southeast, which were upwind of the sampling site during approximately 50% of the study period. The most abundant type of Cu-bearing particle, representing 74% of the total, was associated with sulfur. However, the analysis was not able to specify the form of sulfur present. Anderson et al. (1988) concluded that the smelters to the southeast were the probable source. Mine waste dump sites are another source of airborne copper (Mullins and Norman 1994). Particle size distribution and the concentration of copper in particle size ranges differ depending on the mine waste site (Mullins and Norman 1994).

Mean concentration ranges of copper in remote (any area of lowest copper concentration such as the Antarctic or Arctic) and rural (any site that represents a regional background that is not directly influenced by local anthropogenic emissions) precipitation ranges were 0.013–1.83 and 0.68–1.5 ppb, respectively, based on a weight per unit volume basis (Barrie et al. 1987). Although an earlier survey referred to by these investigators (Galloway et al. 1982) yielded much higher values of 0.060 and 5.4 ppb, these were ascribed to sample contamination. The mean concentration of copper in rain reported in an extensive study in southern Ontario, Canada was 1.57±0.36 ppb during 1982 (Chan et al. 1986). These concentrations showed little spatial variability. Concentration of copper in cloud water over Olympic Peninsula in Washington State has been measured at 1.7±1.6 µg/L (air equivalent mean concentration of 0.5 ng/m³) (Vong et al. 1997). Copper concentrations in precipitation may be affected by proximity to

5. POTENTIAL FOR HUMAN EXPOSURE

industry, but concentrations do not appear to be affected by proximity to automobile emissions. Elevated levels of copper in fog water have been observed 3 km downwind from a refuse incinerator in Switzerland (Johnson et al. 1987). The concentration of copper in rain samples taken within 2–15 km downwind of the Claremont, New Hampshire municipal waste incinerator was found to range from 0.11 to 2.12 µg/L with a mean concentration of 0.87 µg/L. (Feng et al. 2000). Cu(II) concentrations in fog water from the central valley of California ranged from 1.7 to 388 ppb (Miller et al. 1987). The source of the copper was not investigated. The highest values were recorded just as the fog was dissipating.

Copper deposition from automobile emissions, as measured by the concentration of copper in snow, did not vary significantly as a function of distance (15–150 meters) from an expressway in Montreal, Canada (Loranger et al. 1996).

Airborne concentrations of copper in the indoor atmosphere within homes located in Suffolk and Onondaga counties in New York average between 8 and 12 ng/m³ (Koutrakis et al. 1992). The concentration was significantly affected by the use of kerosene heaters, which were found to emit copper into the indoor air at a rate of 15,630 ng/hour (Koutrakis et al. 1992).

5.5.2 Water

Copper is widely distributed in water since it is a naturally occurring element. The results of several studies in which concentrations of copper in water were reported are described below and summarized in Tables 5-14, 5-15, and 5-16. Data from older studies may have been analyzed with instrumentation with high detection limits, and samples were often contaminated during collection, treatment, and analysis.

Groundwater collected from wells from 2013 to 2016 by USGS for the National Water-Quality Assessment Project show that copper concentration ranges from 0.2 to 98.4 µg/L (USGS 2020b). Copper concentrations in drinking water can vary widely (≤5–10,200 ppb) and can exceed the action level of 1,300 ppb (1.3 mg/L) that is the regulatory Maximum Contaminant Level Goal (MCLG) for copper in drinking water (EPA 1991; EPA 2021, 40 CFR Part 141). Copper was found at concentrations greater than EPA's Treatment Technology Action Level of 1.3 mg/L in 0.06 percent of domestic wells sampled by USGS from 1991 to 2004 (USGS 2009b). An Action Level is the concentration of a contaminant in potable water, which if exceeded in ten percent of monitoring systems requires treatment for corrosion control and public notification (EPA 2018).

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-14. Surface Water Monitoring Data for Copper

Location(s)	Type	Date(s)	Range (µg/L) ^a	Mean Concentration (µg/L)	Notes	Reference
United States	USGS survey stations	Not specified	Not reported	4.2	53,862 occurrences	Eckel and Jacob 1988
New Jersey	Representative sample	1977-1979	Maximum = 261.0	Not reported	1603 samples taken from 600 sites. Median = 3.0	Page 1981
East Arctic Ocean	Ocean water	1980	32-489 ng/kg	93 ± 38 ng/kg	26 locations 0.5–1 m depth. Mean concentration at depth was 400 ng/kg Unfiltered samples	Mart and Nurnberg 1984
Atlantic Ocean	Ocean water	Not specified	0.79-3.9 nM	Not reported	20 sites, 2 cruises, 0–1 m depth Unfiltered samples	Yeats 1988
Massachusetts	Pond water	April 1971-March 1972	<10–105	Not reported	Low in summer, high in winter	Kimball 1973
Canada	Lake water	November 1976-January 1977	1-8	2	Acid sensitive lakes	Reed and Henningson 1984
Lake Superior	Lake water	August-September 1991	629-834	756	3 samples Filtered samples	Nriagu et al. 1996
Lake Erie	Lake water	August 1993	703-1,061	870	9 samples Filtered samples	Nriagu et al. 1996
Lake Ontario	Lake water	May-June 1993; October 1993	540-1,098	830	14 samples Filtered samples	Nriagu et al. 1996
Indiana	Stream and pond water, near acidic mine drainage		32-1,200	736	12 samples taken from streams and ponds near abandoned Cerbat Mountain coal mines Filtered samples	Allen et al. 1996
Cerbat Mountains, northwestern Arizona	Surface water in a copper mining area	March 1995, September 1995	100-69,000	Not reported	Samples obtained from the Cerbat Mountains mining area; 15 surface water sites with 14 sites downstream from old tailings and adits. Median=1,200	Rosner 1998

^a Range is µg/L unless otherwise stated
 USGS = United States Geological Survey

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-15. Copper Concentrations in Groundwater Water Monitoring Data

Location(s)	Type	Date(s)	Range (µg/L)	Median (µg/L)	Notes	Reference
New Jersey	Representative sample	1977-1979	Maximum = 2783.0	5.0	1,063 samples, 90 th percentile 64.0 ppb, groundwater may or may not be used for drinking water	Page 1981
Denver, Colorado	Shallow monitoring well	1993	<1-14	2.0	30 monitoring wells, 22 with PVC casings and 8 with metal casings; samples obtained after purging well 20 minutes Filtered pesticide samples and unfiltered VOC samples	Bruce and McMahon 1996

Table 5-16. Copper Concentrations in Drinking Water Monitoring Data

Location(s)	Type	Date(s)	Range (µg/L)	Mean (µg/L)	Notes	Reference
Nova Scotia, four communities	Running tap water from private wells	NS	40-200	NR	53% of homes exceeded Canada's maximum permissible limit for copper (1.0 mg/L)	Maessen et al. 1985
	Standing tap water from private wells	NS	130-2,450	NR		
New Bedford, Massachusetts	Running tap water from private wells	April 1987, 1992, 1993 July 1992	NR	230-560	24 sample areas included	Yannoni and Piorkowski 1995
Canada (National Survey)	Raw, treated, and distributed water	November 1976-January 1977	5.0-620	NR	Sampled raw, treated, and distributed water from 70 municipalities; median concentration was 20; noted differences based on source and type of water Filtered samples	Meranger et al. 1979

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-16. Copper Concentrations in Drinking Water Monitoring Data

Location(s)	Type	Date(s)	Range (µg/L)	Mean (µg/L)	Notes	Reference
New Jersey	School drinking water	1991-1992	BD-10.2	NR	Sampled 2 water fountains in each of 50 schools. Median concentration ranged from 0.068 to 0.26 depending on time of day. Noted differences based on time of day and corrosivity of samples	Murphy 1993
Berlin, Germany	Running tap water from municipal water supply	June 1998-March 2001	0.009-4.2	0.436-0.561	2619 samples from 2944 households were tested.	Zietz et al. 2003a
Lower Saxony, Germany	Tap water from municipal water supply	January 1997-November 1999	>0.01-6.40	0.106-0.183	1619 stagnated water samples and 1660 random daytime samples.	Zietz et al. 2003b

BD = below detection; NR = not reported

Copper concentrations in drinking water vary widely as a result of variations in pH, hardness of the source water, and copper released from the water distribution system materials (Davies and Bennett 1985; Yannoni and Piorkowski 1995). A Canadian national survey of copper and other metals in drinking water was conducted from November 1976 to January 1977 (Meranger et al. 1979). Supplies from 70 municipalities representing 38% of the Canadian population were included in the survey, including 50 derived from river or lake water and 20 derived from groundwater. Unfiltered raw, treated, and distributed drinking waters were analyzed. Whether the water was derived from river, lake, or well water did not significantly affect the copper concentration in the raw water. Only in a few supplies did copper levels in raw water exceed 20 ppb and only one of these was derived from groundwater. The results in groundwater contrast with those of Page (1981) in New Jersey, in which over 100 wells contained copper levels in excess of 64 ppb. However, that study included groundwater that was a source of drinking water, in addition to groundwater that was not. The copper concentration in Canadian treated water was generally ~10 ppb (Meranger et al. 1979). In 20% of the samples, the copper level in distributed water was significantly higher than the treated water. The increase was greater in areas where the water was soft and corrosive, thus enhancing leaching of copper from the distribution system.

Elevated concentrations of copper in drinking water can result as a consequence of leaching processes

5. POTENTIAL FOR HUMAN EXPOSURE

that occur in water distribution systems. Data from 208 U.S. households indicates that about a third of U.S. homes have drinking water containing more than 0.1 ppm copper (Brewer 2010). A study of 1,000 water samples from random households in Ohio found that ~30% contained copper levels >1 ppm (Strain et al. 1984). The highest copper level in the study was 18 ppm. In a study of private water wells in four communities in Nova Scotia, Maessen et al. (1985) found that the concentrations of copper increased in water that remained in the distribution system overnight, indicating that copper was mobilized from the distribution system. Whereas the level of copper in running water was generally very low, that in standing water was variable and exceeded 1.0 ppm in 53% of the homes. Similar results were reported for U.S. cities (Maessen et al. 1985; Schock and Neff 1988; Strain et al. 1984). In a study in Seattle, Washington, the mean copper concentrations in running and standing water were 0.16 and 0.45 ppm, respectively, and 24% of the standing water samples exceeded 1.0 ppm (Maessen et al. 1985). The difference in copper level between standing and flushed systems became evident at pH 7 and increased with decreasing pH (Strain et al. 1984). Copper levels in school drinking water were found to differ by 3-fold between first draw and 10-minute flush water samples, irrespective of the corrosiveness of the water (Murphy 1993). However, the concentration of copper in both first draw and 10-minute flush samples decreased by approximately 10-fold as the corrosiveness of the water decreased. Increasing pH in water distribution lines has been found to result in an overall decrease in metal concentrations. For example, increasing the pH of water from 7.5 to 8.5 in distribution lines decreased copper concentration by 50% (Yannoni and Piorkowski 1995).

In homes with copper piping, the mean concentration of copper in tap water has been shown to decline with the age of the home. In a sampling of tap water of 2,619 households in Berlin, Germany that are supplied with municipal drinking water, the mean concentration of copper decreased from 0.77 ppm in homes with stated ages of 0–<5 years to 0.23 ppm in homes with stated ages of 35–<40 years (Zietz et al. 2003a). In another study of 1,619 homes in Lower Saxony, Germany, the mean concentration of copper in first draw tap water decreased from 0.37 ppm in homes with stated ages of 0–<5 years to 0.05 ppm in homes with stated ages of 35–<45 years (Zietz et al. 2003b). These decreases of copper concentration with age were attributed to a buildup of a surface layer on the piping that reduced corrosion. However, in these same two studies, it was found that the concentration of copper in tap water began to increase with increasing age in homes with stated ages of >45 years. This increase in copper concentration was attributed to the increased probability of repair or partial placement (or unknown total replacement) of piping in these homes.

In a study of groundwaters and surface waters throughout New Jersey in which >1,000 wells and 600 surface sites were sampled, the median copper levels in groundwater and surface water were 5.0 and 3.0

5. POTENTIAL FOR HUMAN EXPOSURE

ppb, respectively (Page 1981, Table 1). The respective 90th percentile and maximum levels were 64.0 and 2,783.0 ppb for groundwater and 9.0 and 261.0 ppb for surface water. The pattern of contamination in surface water correlates with light hydrocarbons, while that in groundwater correlates with heavy metals. This suggests that the sources of contamination of surface water and groundwater are different. The nature of the sites with elevated levels of copper was not indicated.

Copper levels in surface water range from 0.5–1,000 ppb, with a median of 10 ppb; seawater contains <1–5 ppb (Davies and Bennett 1985; Mart and Nurnberg 1984; Page 1981; Perwak et al. 1980; Yeats 1988). USGS collects data on the bottom material and surface water of streams for the Regional Stream Quality Assessment. Copper in bottom material ranged from 0.005 to 306 mg/kg (USGS 2018). The geometric mean, standard deviation, and median concentration of dissolved copper in surface water based on 53,862 occurrences in the Water Quality Portal are 4.2 ± 2.71 and 4.0 ppb, respectively (WQP 2020). Higher concentrations tend to be found in New England, the western Gulf, and the lower Colorado River.

Copper concentrations were measured in surface water obtained from sampling sites in the Spearfish Creek, Whitewood Creek, and Bear Butte Creek watersheds. These watersheds are affected by water leaching from tailings and acid mine drainage from gold mining operations in the Black Hills of South Dakota. Copper concentrations of <0.24–28 µg/L were measured in surface water, whereas concentrations in sediments were much higher, ranging from 7.8 to 159 mg/kg (May et al. 2001).

In a survey of sources of copper in stormwater, measurements of copper concentrations in stormwater samples were taken from various urban locations in Birmingham, Alabama. Copper concentrations were generally low in filtered samples (dissolved copper), ranging between 1.4 and 20 µg/L; however, they were much higher in unfiltered samples (copper bound to particulate matter) with mean values (in µg/L) of 280 (street runoff), 135 (vehicle service areas), 116 (parking areas), 110 (roof areas), 81 (landscaped areas), 50 (urban creeks), and 43 (retention ponds) (Pitt et al. 1995).

As a result of improvements in controlling the quality of discharges from municipal and industrial wastewater treatment plants mandated in the Clean Water Act, copper concentrations have been declining in surface waters. For example, median copper concentrations in the Hudson River estuary have fallen 36–56% between the mid-1970s and the mid-1990s (Sañudo-Wilhelmy and Gill 1999).

The copper concentration in some bodies of water evidently varies with season. In a study of a small pond in Massachusetts from April of 1971 to March 1972, the concentration of copper was found to vary, decreasing during the spring and early summer to lows of <10–30 ppm in early August and then increasing when the pond was under the cover of ice to maximum values of 80–105 ppb in late January

5. POTENTIAL FOR HUMAN EXPOSURE

and early February (Kimball 1973). Similar seasonal variations were noted in the epilimnion of the offshore waters of the Great Lakes (Nriagu et al. 1996). In both examples, the cycling of copper concentrations is thought to be a response to biological need and copper uptake during the growing season and its subsequent release from seasonal die-off and decay of biota.

Copper concentrations in seawater usually are in the 1–5 ppb range (Perwak et al. 1980). Copper levels are overall lower in the Pacific Ocean versus the Atlantic Ocean and higher near the continental shelf than in the open ocean. Copper concentrations in surface water at a depth of 1 meter transected on a cruise from Nova Scotia to the Sargasso Sea ranged from 57.2 to 210 parts per trillion (ppt) (Yeats 1988). The mean value in surface water sampled at a depth of 1 meter of the eastern Arctic Ocean was 93 ppt (Mart and Nurnberg 1984). As noted in a review by Kennish (1998), concentrations of copper in estuarine and coastal waters in the United States were 0.3–3.8 and 0.1–2.5 ppb, respectively.

5.5.3 Sediment and Soil

Copper occurs naturally in the Earth's crust at a mean concentration of approximately 50 ppm (Henckens and Worrell 2020). Rauch and Graedel (2007) estimate that 9.9×10^{11} Gg (9.9×10^8 kg) of copper exists in the earth's crust. Several databases report copper levels in soil and sediment in the United States. The National Geochemical Database by USGS (2016) reports that copper occurs in soils at levels of 0.005 to 200,000 ppm in sediment at levels of 0.001 to 150,000 ppm. The median level of copper in soils and sediments reported to the National Geochemical Database is 30 ppm in soils and sediments (USGS 2016). The National Water Information System by USGS reports copper in soil at levels of 0.84 to 9.8 mg/kg (WQP 2020). Copper occurs in sediments at levels of 0.12 to 35,700 mg/kg (WQP 2020). EPA reports levels in soil of 0.58 to 334 mg/kg (WQP 2020). In 2007, USGS conducted a geochemical and mineralogical survey of soils of the conterminous United States. The mean concentration of copper calculated from the 4841 samples taken was 17.9 mg/kg, with values ranging from <0.5 to 996 mg/kg (USGS 2013).

Copper concentrations in soil may be much higher in the vicinity of a source of copper emissions, such as a mining operation or smelter. Concentrations in the top 5 cm of soil near the boundary of a secondary copper smelter were $2,480 \pm 585$ ppm (Davies and Bennett 1985). Maximum wetland soil/sediment copper concentrations were 6,912 ppm in the immediate vicinity of a Sudbury, Ontario smelter but the concentration decreased logarithmically with increasing distance from the smelter (Taylor and Crowder 1983). The observation that the copper concentrations were highest in soils within 1–2 km from the smelter and decreased exponentially with increasing distance from the plant suggests that copper in the soil from the study area was primarily derived from particulate emissions from the smelter.

5. POTENTIAL FOR HUMAN EXPOSURE

Copper and its compounds were reported at 929 of 1,867 hazardous waste sites on the NPL of highest priority sites for possible remedial action (ATSDR 2019). Since copper is commonly found in soil, technically it occurs at all sites. In past work, data analysis of metal concentrations measured in soil from hazardous waste sites taken from the 1980–1983 Contract Laboratory Program (CLP) Analytical Results Data Base (CARD) was conducted to ascertain whether elemental concentrations at hazardous waste sites were elevated above that which normally would be expected in soil of similar composition and derivation. Of the 1,307 samples in CARD, 10.5 and 7.3% (95 and 99% confidence intervals, respectively) had copper concentrations exceeding the number normally expected in soil (Eckel and Langley 1988).

In a study of 340 soil samples collected from diverse land-use situations, the average copper concentrations were 25 mg/kg in agricultural land, 50 mg/kg in suburban/residential land, 100 mg/kg in mixed industrial/residential land, and 175 ppm in industrial/inner urban areas (Haines 1984). From an analysis of the spatial distribution of the copper concentrations in soils where lowest copper soil concentrations are observed for rural (agricultural) soils and highest in soils obtained from industrialized urban areas, it was concluded that most of the contamination was a result of airborne deposition from industrial sources. Soil samples from urban gardens in New York had concentrations of copper ranging from 16.9 to 171 mg/kg, and an orchard had copper concentrations ranging from 19.7 to 62.8 mg/kg (Cai et al. 2016).

The concentrations of copper in soils and sediments were assessed as part of the National Water-Quality Assessment Program (Rice 1999). The median concentrations of copper at 541 sites throughout the conterminous United States ranged from 5 to 70 µg/g (dry weight). At nonurban indicator sites, the median concentrations ranged from 13 to 47 µg/g. The same study derived an average crustal abundance of copper of 60 µg/g (60 ppm).

Sediment is an important sink and reservoir for copper. In areas where there is no known input of copper obtained from anthropogenic sources, sediment generally contains <50 mg/kg copper. The level can reach several thousand ppm in polluted areas (Harrison and Bishop 1984). The mean copper level in surficial sediment of Penobscot Bay, Maine was 14.1 mg/kg (dry weight), while that in estuaries or bays in other New England locations ranged from 4.4 to 57.7 mg/kg (Larsen et al. 1983b). Levels reflect anthropogenic input as well as the mineral content of the regional bedrock. Copper levels in sediment from 24 sites along the New Jersey coast ranged from <1.0 to 202 mg/kg, with a mean value of 66 mg/kg (Renwick and Edenborn 1983). The texture of the sediment varied from 94% clay to 100% sand, and the copper level was correlated negatively with the percentage of sand in the sediment.

5. POTENTIAL FOR HUMAN EXPOSURE

Surficial sediment in lakes in the Sudbury region of northeastern Ontario, where several smelters operate, decreased rapidly with increasing distance from the smelters (Bradley and Morris 1986). Three lakes, 10 km from the Sudbury smelters, contained copper concentrations in sediment approaching 2,000 mg/kg dry weight, over 100 times the concentration in a baseline lake 180 km away.

An analysis of the Coastal Sediment Database (COSED) showed that 73% of coastal waterways had copper concentrations below 42 µg/g; 25% had copper concentrations between 42 and 210 µg/g; and 2% were above 210 µg/g. These higher concentrations were associated with locations of high ship traffic, industrial activity, and relatively poor water flushing (Daskalakis and O'Connor 1995). In coastal areas receiving persistently high influxes of contaminants, high concentrations of copper (151 ppm) have been measured in sediments to depths of 54 cm (Bopp et al. 1993). Combined sewer outflows can also contribute significantly to the copper content of sediments. For example, mean (arithmetic) copper concentrations of 180, 208, 280, and 284 mg/kg were measured in sediment samples obtained near four sewer outflows in the lower Passaic River, New Jersey (Iannuzzi et al. 1997). In Jamaica Bay, New York, copper concentrations in sediments were 151–406 mg/kg, with a concentration of 151 ppm in sediment core samples obtained at a depth of 52–54 cm (Bopp et al. 1993). The highest concentrations were found in the middle depths (16–44 cm) ranging from 280 to 406 mg/kg during a period when untreated industrial effluents and sewage outflows entered the bay. However, copper concentrations in surface sediments (0–2 cm) were measured at 208 mg/kg. The decrease in copper concentration in the surface sediments suggests that efforts to reduce metal contaminants from sewage outflows have been making an impact on the copper concentrations in receiving waters and their sediments.

5.5.4 Other Media

In addition to the ingestion of drinking water, the consumption of food is the other primary route for copper intake in the general population. Copper is an essential nutrient present in many plant and animal foods and available as a dietary supplement. The Recommended Dietary Allowance (RDA) and Tolerable Upper Intake Level (UL) by life stage group are presented in Table 5-17. Copper intake per day based on NHANES data is provided in Table 5-18. Voluntary food fortification in the United States increases the probability of consuming copper and is associated with greater risk of exceeding the UL for children (Sacco et al. 2013).

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-17. Dietary Reference Intakes for Copper

Life stage group ^a	RDA (µg/day)	UL (µg/day)
1-3 years	340	1,000
4-8 years	440	3,000
9-13 years	700	5,000
14-18 years	890	8,000
19 years and over	900	10,000
Pregnant females, 18 years and younger	1,000	8,000
Pregnant females, 19-50 years	1,000	10,000
Lactating females, 18 years and younger	1,300	8,000
Lactating females, 19-50 years	1,300	10,000

Source: Institute of Medicine 2006

RDA = Recommended Dietary Allowance, UL = Upper Intake Level

^aRDAs are not estimated for ages 0 to 12 months. Adequate intake at this life stage is 220 µg/day.

Table 5-18. Mean Amount of Copper Consumed per Individual by Gender and Age

Gender and age (years)	Amount consumed (mg)	Standard error
Males		
2-5	0.8	0.02
6-11	0.9	0.05
12-19	1.1	0.03
20-29	1.2	0.05
30-39	1.4	0.06
40-49	1.4	0.07
50-59	1.5	0.07
60-69	1.3	0.05
70 and over	1.3	0.05
Females		
2-5	0.7	0.02
6-11	0.9	0.03
12-19	0.9	0.04
20-29	1.1	0.04
30-39	1.1	0.04
40-49	1.0	0.03
50-59	1.1	0.06
60-69	1.2	0.05
70 and over	1.1	0.03

Source: USDA 2020

The FDA Total Diet Survey provides copper concentration in various foods, examples of which are given in Table 5-19 (FDA 2017). The copper content in baby food is given in Table 5-20. The highest concentrations of dietary copper were found in liver; in some oat and bran cereals; in some legumes and nuts; and in chocolate syrup, candy, and some desserts. Coleman et al. (1992) reported copper concentrations in the edible tissues of livestock and poultry with the highest mean concentrations (mg/kg) found in liver (cow 3.7; lamb 89.8; chicken 4.60; turkey 7.14), followed by kidney (cow 8.15; lamb 5.39;

5. POTENTIAL FOR HUMAN EXPOSURE

chicken 3.07; turkey 3.68), and muscle (cow 1.41; lamb 1.47; chicken 0.67; turkey 0.83) (Coleman et al. 1992).

Table 5-19. Copper Content of Selected Foods (mg/kg)

Food description	Mean±SD	Food description	Mean±SD
Liver (beef/calf), pan-cooked with oil	135.00±40.78	Pear, canned in light syrup	0.55±0.22
Sunflower seeds (shelled), roasted, salted	19.23±0.40	Pepper, sweet, green, raw	0.55±0.28
Walnuts, shelled	11.70±0.00	Beef with vegetables in sauce, from Chinese carry-out	0.54±0.24
Peanut butter, creamy	4.94±0.38	Cornbread, homemade	0.54±0.03
Peanuts, dry roasted, salted	4.82±0.16	Meatloaf, beef, homemade	0.54±0.08
Raisin bran cereal	4.32±0.31	Pie, pumpkin, fresh/frozen	0.54±0.04
Syrup, chocolate	3.82±0.26	Salmon, steaks/fillets, baked	0.53±0.12
Candy bar, milk chocolate, plain	3.67±0.33	Cream of wheat (farina), enriched, cooked	0.52±0.17
Shredded wheat cereal	3.66±0.38	Tomato, raw	0.52±0.22
Potato chips	3.57±0.35	Chicken potpie, frozen, heated	0.51±0.03
Oat ring cereal	3.55±0.23	Corn flakes cereal	0.51±0.04
Brownie	3.43±0.17	Frankfurter (beef/pork), boiled	0.51±0.08
Raisins	3.30±0.35	Tomato juice, bottled	0.51±0.06
Pinto beans, dry, boiled	3.18±0.39	Chicken breast, fried, fast-food (with skin)	0.50±0.07
Avocado, raw	2.96±0.59	Pineapple, canned in juice	0.50±0.05
Granola with raisins	2.90±0.38	Chicken nuggets, fast-food	0.49±0.10
Bread, whole wheat	2.77±0.02	Pie, apple, fresh/frozen	0.48±0.07
White beans, dry, boiled	2.71±0.58	Pineapple juice, frozen concentrate, reconstituted	0.48±0.05
Chocolate chip cookies	2.70±0.70	Collards, fresh/frozen, boiled	0.47±0.06
Bread, multigrain	2.64±0.16	Potatoes, mashed, prepared from fresh	0.47±0.23
Granola bar, with raisins	2.47±0.85	Orange juice, frozen concentrate, reconstituted	0.46±0.06
Cake, chocolate with icing	2.38±0.17	Blueberries, raw	0.45±0.00
Mushrooms, raw	2.34±0.50	Tuna, canned in water, drained	0.45±0.05
Sweet potato, baked, peel removed	2.31±0.00	Beets, canned	0.44±0.12
Candy bar, chocolate, nougat, and nuts	2.25±0.11	Brussels sprouts, fresh/frozen, boiled	0.43±0.04
Popcorn, microwave, butter-flavored	2.23±0.21	Fruit cocktail, canned in light syrup	0.43±0.02
Pork and beans, canned	2.10±0.14	Watermelon, raw/frozen	0.43±0.33
Lima beans, immature, frozen, boiled	2.08±0.20	Orange (navel/Valencia), raw	0.42±0.07
Sandwich cookies with creme filling	2.06±0.42	Orange juice, bottled/carton	0.42±0.02
Ice cream, chocolate	1.85±0.00	Strawberries, raw/frozen	0.40±0.13
Refried beans, canned	1.85±0.13	Turkey breast, oven-roasted	0.40±0.07
Crisped rice cereal	1.82±0.14	Peach, canned in light/medium syrup	0.39±0.03
Crackers, graham	1.79±0.20	Carrot, fresh, peeled, boiled	0.36±0.09
Meal replacement, liquid RTD, any flavor	1.70±0.62	Green beans, canned	0.36±0.08
Pretzels, hard, salted	1.66±0.15	Onion, mature, raw	0.36±0.06
Black olives	1.63±0.37	Soup, tomato, canned, condensed, prepared with water	0.36±0.03
Tomato catsup	1.55±0.17	Chicken breast, oven-roasted (skin removed)	0.35±0.05
Rice, brown, cooked	1.52±0.00	Eggplant, fresh, peeled, boiled	0.34±0.25
Chili con carne with beans, canned	1.51±0.03	Applesauce, bottled	0.33±0.06
Lamb chop, pan-cooked with oil	1.51±0.10	Bologna (beef/pork)	0.33±0.02
Bagel, plain, toasted	1.48±0.14	Cantaloupe, raw/frozen	0.33±0.22
Bread, rye	1.46±0.29	Cheese, Swiss, natural	0.33±0.05
French fries, fast-food	1.43±0.33	Corn, fresh/frozen, boiled	0.33±0.24
Shrimp, boiled	1.40±0.56	Grapefruit, raw	0.33±0.04
Crackers, saltine	1.38±0.14	Carrot, baby, raw	0.32±0.23
English muffin, plain, toasted	1.35±0.14	Apricots, canned in heavy/light syrup	0.30±0.06

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-19. Copper Content of Selected Foods (mg/kg)

Food description	Mean±SD	Food description	Mean±SD
Noodles, egg, enriched, boiled	1.34±0.29	Soup, vegetable beef, canned, condensed, prepared with water	0.30±0.06
Soup, bean with bacon/pork, canned, condensed, prepared with water	1.28±0.02	Broccoli, fresh/frozen, boiled	0.29±0.22
Spaghetti, enriched, boiled	1.25±0.34	Dill cucumber pickles	0.27±0.03
Bread, white, enriched	1.23±0.16	Grapefruit juice, bottled	0.27±0.06
Beef steak, loin/sirloin, broiled	1.18±0.46	Cod, baked	0.26±0.00
Pineapple, raw/frozen	1.16±0.00	Sweet & sour sauce	0.26±0.23
Spaghetti with meat sauce, homemade	1.16±0.10	Cheese, cheddar, natural (sharp/mild)	0.25±0.18
Bread, white roll/bun (hamburger/hotdog)	1.15±0.00	Lettuce, leaf, raw	0.23±0.46
Beef stroganoff with noodles, homemade	1.14±0.25	Milk, chocolate, low-fat, fluid	0.21±0.14
Fruit-flavored cereal, presweetened	1.13±0.20	Grape juice, frozen concentrate, reconstituted	0.20±0.03
Crackers, butter-type	1.12±0.11	Prune juice, bottled	0.20±0.01
Burrito with beef, beans, and cheese, from Mexican carry-out	1.11±0.21	Cucumber, peeled, raw	0.16±0.18
Pizza, cheese, fast-food	1.11±0.00	Cake, yellow with icing	0.15±0.17
Quarter-pound hamburger on bun, fast-food	1.09±0.04	Cream substitute, non-dairy, liquid/frozen	0.13±0.23
Tortilla, flour	1.08±0.11	Wine, dry table, red/white	0.12±0.04
Turkey, ground, pan-cooked	1.08±0.00	Cheese, American, processed	0.11±0.20
Peas, green, fresh/frozen, boiled	1.05±0.19	Corn, canned	0.11±0.18
Pizza, cheese and pepperoni, regular crust, from pizza carry-out	1.03±0.05	Apple juice, bottled	0.10±0.03
Corn/tortilla chips	1.02±0.10	Sour cream dip, any flavor	0.10±0.17
Fried rice, meatless, from Chinese carry-out	1.02±0.18	Turnip, fresh/frozen, boiled	0.10±0.17
Quarter-pound cheeseburger on bun, fast-food	1.02±0.12	Catfish, pan-cooked with oil	0.09±0.18
Doughnut, cake-type, any flavor	1.00±0.28	Clam chowder, New England, canned, condensed, prepared with whole milk	0.09±0.15
Salami, luncheon-meat type (not hard)	0.96±0.12	Cottage cheese, creamed, low-fat (2% milk fat)	0.09±0.15
Asparagus, fresh/frozen, boiled	0.93±0.15	Luncheon meat (chicken/turkey)	0.09±0.16
Pork bacon, oven-cooked	0.93±0.22	Sorbet, fruit-flavored	0.09±0.15
Tortilla, corn	0.92±0.00	Soup, chicken noodle, canned, condensed, prepared with water	0.09±0.15
Potato, baked (with peel)	0.89±0.15	Lettuce, iceberg, raw	0.08±0.15
Banana, raw	0.87±0.15	Cabbage, fresh, boiled	0.07±0.14
Beef roast, chuck, oven-roasted	0.87±0.09	Fruit juice blend (100% juice), canned/bottled	0.05±0.05
Biscuits, refrigerated-type, baked	0.86±0.01	Cranberry juice cocktail, canned/bottled	0.03±0.05
Rice, white, enriched, cooked	0.85±0.15	Milk, low-fat (2%), fluid	0.03±0.04
Chicken leg, fried, fast-food (with skin)	0.84±0.12	Lemonade, frozen concentrate, reconstituted	0.02±0.04
Pork sausage (link/patty), oven-cooked	0.84±0.05	Tea, from tea bag	0.02±0.03
Sweet potatoes, canned	0.84±0.17	Milk, skim, fluid	0.01±0.03
Iced cinnamon roll	0.83±0.08	Milk, whole, fluid	0.01±0.03
Lasagna with meat, frozen, heated	0.83±0.07	Apple (red), raw (with peel)	0.00±0.00
Tomato sauce, plain, bottled	0.83±0.05	Beer	0.00±0.00
Fish sticks or patty, frozen, oven-cooked	0.82±0.19	Bottled drinking water (mineral/spring), not carbonated or flavored	0.00±0.00
Salami, dry/hard	0.82±0.00	Brown gravy, canned or bottled	0.00±0.00
Mustard, yellow, plain	0.81±0.06	Butter, regular (not low-fat), salted	0.00±0.00
Egg, cheese, and ham on English muffin, fast-food	0.80±0.13	Candy, hard, any flavor	0.00±0.00
Oatmeal, plain, cooked	0.77±0.20	Carbonated beverage, cola, low-calorie	0.00±0.00

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-19. Copper Content of Selected Foods (mg/kg)

Food description	Mean±SD	Food description	Mean±SD
Peach, raw/frozen	0.77±0.18	Carbonated beverage, cola, regular	0.00±0.00
Tomato salsa, bottled	0.77±0.06	Carbonated beverage, fruit-flavored, regular	0.00±0.00
Chicken filet (broiled) sandwich on bun, fast-food	0.75±0.13	Cauliflower, fresh/frozen, boiled	0.00±0.00
Chicken leg, fried, fast-food (with skin)	0.75±0.00	Celery, raw	0.00±0.00
Macaroni salad, from grocery/deli	0.74±0.15	Cheese, Monterey jack	0.00±0.00
Biscuits, fast-food	0.73±0.00	Cheese, mozzarella	0.00±0.00
Potato salad, mayonnaise-type, from grocery/deli	0.71±0.27	Coffee, decaffeinated, from ground	0.00±0.00
Potato, boiled (without peel)	0.71±0.26	Coffee, from ground	0.00±0.00
Tuna noodle casserole, homemade	0.71±0.09	Coleslaw, mayonnaise-type, from grocery/deli	0.00±0.00
Chicken thigh, oven-roasted (skin removed)	0.70±0.15	Corn/hominy grits, enriched, cooked	0.00±0.00
Fish sandwich on bun, fast-food	0.69±0.06	Cream cheese	0.00±0.00
Okra, fresh/frozen, boiled	0.69±0.03	Cream, half & half	0.00±0.00
Taco/tostada with beef and cheese, from Mexican carry-out	0.69±0.08	Fruit drink (10% juice), canned or bottled	0.00±0.00
Pancakes, frozen, heated	0.68±0.05	Fruit drink, from powder	0.00±0.00
Pear, raw (with peel)	0.68±0.07	Gelatin dessert, any flavor	0.00±0.00
Breakfast tart/toaster pastry	0.67±0.08	Honey	0.00±0.00
Soup, Oriental noodles (ramen noodles), prepared with water	0.67±0.04	Ice cream, light, vanilla	0.00±0.00
Squash, winter (Hubbard or acorn), fresh/frozen, boiled	0.67±0.15	Ice cream, regular (not low-fat), vanilla	0.00±0.00
Beef, ground, regular, pan-cooked	0.66±0.09	Jelly, any flavor	0.00±0.00
Pork roast, loin, oven-roasted	0.64±0.02	Margarine, regular (not low-fat), salted	0.00±0.00
Eggs, boiled	0.63±0.18	Mayonnaise, regular, bottled	0.00±0.00
Eggs, scrambled with oil	0.63±0.10	Milk shake, vanilla, fast-food	0.00±0.00
Pork chop, pan-cooked with oil	0.62±0.06	Olive oil	0.00±0.00
Sugar cookies	0.62±0.06	Popsicle, fruit-flavored	0.00±0.00
Summer squash, fresh/frozen, boiled	0.62±0.23	Pudding, ready-to-eat, flavor other than chocolate	0.00±0.00
Grapes (red/green), raw	0.60±0.13	Salad dressing, creamy/buttermilk type, low-calorie	0.00±0.00
Green beans, fresh/frozen, boiled	0.60±0.18	Salad dressing, creamy/buttermilk type, regular	0.00±0.00
Spinach, fresh/frozen, boiled	0.60±0.14	Salad dressing, Italian, regular	0.00±0.00
Ham, cured (not canned), baked	0.59±0.11	Sour cream	0.00±0.00
Milk shake, chocolate, fast-food	0.59±0.35	Sugar, white, granulated	0.00±0.00
Mixed vegetables, frozen, boiled	0.58±0.12	Syrup, pancake	0.00±0.00
Chicken with vegetables in sauce, from Chinese carry-out	0.57±0.13	Tea, decaffeinated, from tea bag	0.00±0.00
Muffin, blueberry	0.56±0.12	Tilapia, baked	0.00±0.00
Luncheon meat, ham	0.55±0.07	Vegetable oil	0.00±0.00
Macaroni and cheese, prepared from box mix	0.55±0.15	Yogurt, frozen, vanilla	0.00±0.00
Pear, canned in light syrup	0.55±0.22	Yogurt, low-fat, fruit-flavored	0.00±0.00

SD = standard deviation

Source : FDA 2017

5. POTENTIAL FOR HUMAN EXPOSURE

Table 5-20. Copper Content of Selected Baby Foods (mg/kg)

Food description	Mean	SD
Teething biscuits	1.60	0.53
Sweet potatoes	1.24	0.22
Arrowroot cookies	1.08	0.08
Cereal, mixed, dry, prepared with water	1.01	0.18
Cereal, oatmeal with fruit, prepared with water	0.96	0.10
Pears	0.95	0.08
Peaches	0.92	0.14
Turkey and rice	0.92	0.22
Cereal, oatmeal, dry, prepared with water	0.91	0.21
Mixed vegetables	0.90	0.10
Peas	0.89	0.07
Infant formula, soy-based, RTF	0.86	0.06
Bananas	0.84	0.22
Macaroni and cheese with vegetables	0.70	0.27
Chicken noodle dinner	0.67	0.09
Pears and pineapple	0.67	0.08
Plums/prunes with apples or pears	0.65	0.18
Apricots with mixed fruit	0.64	0.20
Carrots	0.64	0.17
Macaroni, tomato, and beef	0.64	0.08
Chicken with rice	0.61	0.06
Vegetables and turkey	0.61	0.16
Apples with fruit other than berries	0.57	0.14
Green beans	0.57	0.05
Infant formula, milk-based, iron fortified, rtf	0.56	0.07
Vegetables and beef	0.56	0.10
Squash	0.55	0.09
Fruit yogurt dessert	0.53	0.23
Vegetables and chicken	0.51	0.14
Cereal, rice, dry, prepared with water	0.46	0.04
Beef and broth/gravy	0.39	0.10
Applesauce	0.36	0.06
Juice, pear	0.34	0.04
Chicken and broth/gravy	0.33	0.02
Apples with berries	0.26	0.23
Turkey and broth/gravy	0.15	0.26
Juice, apple	0.11	0.03
Juice, grape	0.02	0.04

SD = standard deviation

Source : FDA 2017

5. POTENTIAL FOR HUMAN EXPOSURE

The contribution of food groups to copper intake varies depending on the age group (Pennington and Schoen 1996). For example, animal flesh only contributes to 18% of the copper intake for a 2-year-old child but contributes to 38% of the copper intake for a 60–65-year-old male.

Wu et al. (2018) conducted a review of the literature to determine nutrient composition in human milk in the United States and Canada from 1980 to 2017. Average copper levels ranged from 0.02–0.08 µg per 100 g of human milk in women one to six months postpartum and from 0.017–0.02 µg per 100 g of human milk in women seven to twelve months postpartum.

High concentrations of copper have been measured in shellfish and crustacean species such as shrimp and prawns which use a copper-containing protein, hemocyanin, as an oxygen-transport molecule (Olmedo et al. 2013; Venugopal and Gopakumar 2017). Median copper concentrations ranged from 0 mg/kg wet weight in canned frigate to 6.865 mg/kg wet weight in frozen prawn (Olmedo et al. 2013). The calculated intake of copper from fish and shellfish is 0.117 mg/day, which is not expected to pose a risk to the average consumer (Olmedo et al. 2013). Shellfish provide between 7 to 378% of percent daily values of copper, with the highest contributions from oysters, squid, and lobster (Venugopal and Gopakumar 2017). The concentrations of copper in the soft tissue in mussels and oysters collected as part of the U.S. Mussel Watch Program in 1976–1978 were 4–10 ppm (dry weight) for mussels and 25–600 ppm for oysters (Goldberg 1986). Copper concentrations in mussels collected from 11 sites near Monterey Bay, California were 4.63–8.93 ppm (dry weight) (Martin and Castle 1984). Perwak et al. (1980) reported similar results for mussels (3.9–8.5 ppm) and for clams (8.4–171 ppm). Recent measurements of copper concentrations in zebra and quagga mussels taken from Lakes Erie and Ontario in 1997 ranged from 21 to 41 ppm (dry weight) (Rutzke et al. 2000). In the National Oceanic and Atmospheric Administration (NOAA) Mussel Watch Project, copper concentrations were quantified in mollusks (*M. edulis*, *M. californianus*, *C. virginica*, and *Ostrea equestris*) from 113 sites around the United States in 1993 and compared to copper concentrations measured in mollusks taken from the same site in the EPA2 Mussel Watch Program, 1976–1978 (Lauenstein and Daskalakis 1998). The results of the comparison indicate that the decreasing and increasing trends in copper concentrations in mollusks were approximately equal among the sites, except in California, where increasing trends were noted at five sites.

As a part of the National Contaminant Biomonitoring Program of the U.S. Fish and Wildlife Service, eight species of freshwater fish were collected at 112 stations in the United States in 1978–1979 and 1980–1981 (Lowe et al. 1985). The geometric mean concentrations of copper in ppm (wet weight, whole

5. POTENTIAL FOR HUMAN EXPOSURE

fish) for these two periods were 0.86 and 0.68, respectively; the 85th percentiles were 1.14 and 0.90, respectively, and the ranges were 0.29–38.75 and 0.25–24.10, respectively. The highest concentration, 38.75 and 24.10 ppm, during both collecting periods was in white perch from the Susquehanna River; the second highest concentration, 19.3 ppm, was found in white perch from the Delaware River near Trenton, New Jersey. Copper concentrations in common carp and white catfish collected from the same station at the same time were 0.76 and 1.35 ppm, respectively.

Copper residues in muscle of 268 fish specimens from 17 species were analyzed over a 5-year period in several surface water systems in eastern Tennessee (Blevins and Pancorbo 1986). The mean residue levels in the muscle of different species of fish from nine stations ranged from 0.12–0.86 ppm (wet weight). Maximum levels ranged from 0.14 to 2.2 ppm.

Concentrations of copper in three species of fish living in storm treatment ponds have been compared to copper concentrations in controls collected from surrounding surface waters near Orlando, Florida (Campbell 1994). In redear sunfish and bluegill sunfish collected from stormwater ponds, the mean whole body copper concentrations were 6.37 and 2.08 mg/kg wet weight, respectively, and were significantly higher than the mean concentrations of copper, 0.879 and 1.07 mg/kg wet weight, respectively, measured in controls collected in natural lakes or ponds. However, in largemouth bass, the mean copper concentrations in fish collected from stormwater ponds and controls did not significantly differ, with values of 3.81 and 4.71 mg/kg wet weight, respectively.

Respective mean and median copper concentrations of 127 samples of finfish from Chesapeake Bay and its tributaries were 1.66 and 0.36 ppm in 1978, and 1.85 and 0.61 ppm in 1979 (Eisenberg and Topping 1986). In striped bass taken from Turkey Point in the bay, copper levels were below the detection limit of the study ($<0.1 \mu\text{g/g}$) in muscle, but were higher in liver tissue ranging from 0.86 to 23.5 $\mu\text{g/g}$. In gonad tissue obtained from tissue from a different site on the bay, there was also an increase in the mean copper concentration in this tissue (4.25 $\mu\text{g/g}$) as compared to muscle (0.76 $\mu\text{g/g}$). The copper content of muscle tissue of several species of fish collected from metal-contaminated lakes near Sudbury, Ontario, ranged from 0.5 to 1.4 ppm (dry weight). No major pattern in variation was evident among species or among the study lakes (Bradley and Morris 1986). The copper concentration in the livers ranged from 5 to 185 ppm (dry weight) and differed significantly among species and among lakes. Unlike muscle tissue, liver tissue is a good indicator of copper availability, although the data suggest that there are other factor(s) that influence the availability and bioaccumulation of copper in these fish.

5. POTENTIAL FOR HUMAN EXPOSURE

The copper concentrations in the liver of lake trout and grayling taken from four freshwater lakes in Alaska did not correlate well with the concentrations of copper in the sediments of these lakes (Allen-Gil et al. 1997). Lake trout were found to have significantly higher burdens ($p<0.05$) of copper in their livers than grayling, and the concentrations of copper in the livers of trout varied considerably depending on the lake from which they were collected. The species and site differences in copper concentrations in fish livers have been attributed to differences in diet (grayling consume mainly insects, whereas trout consume a mix of snails, insects, and small fish) and time spent at various depths of the water column.

Although the concentrations of copper in plants vary widely, they usually range from 1 to 50 ppm (dry weight) (Davies and Bennett 1985) and from 1 to 143 ppm (dry weight) in edible plants (Perwak et al. 1980). Concentration ratios of copper in plants relative to soil (concentration factors or CF) demonstrate that copper uptake differs significantly between plants. For example, CF values have been found to vary from 0.02 (onion), 0.13 (celery), 0.21 (lettuce), and 0.30 (potato) to 2 (grapes), 4.5 (alfalfa), and 6.8 (grass) (Pinochet et al. 1999). Concentration factors in rice grown in Japan were found to vary among soil types (0.59–3.58) with copper concentrations in rice ranging from 1.7 to 5.1 $\mu\text{g/g}$ (Herawati et al. 2000). Copper concentrations in rice grain from the Yangtze delta in China have been found to increase significantly from 1.4 to 15.5 $\mu\text{g/g}$ when copper concentrations in wastewater irrigated soils increased from 17.0 mg/kg (wet weight) to 101.2 mg/kg (wet weight) (Cao and Hu 2000).

Studies of copper in human tissues suggest that copper content in a 70 kg adult ranges from 50–70 mg (Davies and Bennett 1985). Wise and Zeisler (1984) reported an average copper concentration of 10 ppm in the human liver in 36 samples. Despite the wide variation in copper concentrations in the environment, the copper concentration in the liver only varied by a factor of 2–3.5. The concentration of copper in blood is not expected to be predictive of the total body burden of copper: Saltzman et al. (1990) found that the correlation between copper concentrations measured in blood and total body burden was poor ($r=0.54$).

Copper content in 25 tea samples from China ranged from 7.73 to 63.71 mg/kg (Zhong et al. 2015). In a study of copper release from the inner surface of copper teapots, Ni and Li (2008) found that Cu_2O was a main mineral component of the corrosion by-products.

The range of copper concentrations in the filler tobacco of 10 cigarette brands manufactured by British American Tobacco and International Tobacco Company was 18.26–34.94 $\mu\text{g/cigarette}$ (Benson et al. 2017). The range in the filters after smoking was 1.77–36.48 $\mu\text{g/g}$. The mean copper content of tobacco in Finnish cigarettes was 24.7 ± 10.8 ppm (Mussalo-Rauhamaa et al. 1986). However, only 0.2% of this

5. POTENTIAL FOR HUMAN EXPOSURE

copper passes into mainstream smoke. This translates to a daily exposure of approximately 1 µg of copper in a pack of 20 cigarettes.

In an EPA-sponsored study conducted to determine the metal concentration in sewage sludge (Feiler et al. 1980), copper concentrations in primary sludge at seven POTWs were reported to be 3.0–77.4 ppm, with a median concentration of 20.5 ppm. The plant with the highest copper concentrations received wastes from plating industries, foundries, and coking plants. In a comprehensive survey of heavy metals in sewage sludge, 30 sludges from 23 American cities were analyzed (Mumma et al. 1984). The copper concentration in the sludges ranged from 126 to 7,729 ppm (dry weight), with a median value of 991 ppm. Gutenmann et al. (1994) report similar concentrations (217–793 ppm, dry weight) in sewage sludge obtained from 16 major cities in the United States. The proposed limit for copper in sludge spread on agricultural land is 1,000 ppm (Mumma et al. 1984). The concentration of copper in cow's manure is ~5 ppm (Mumma et al. 1984).

In municipal solid waste compost obtained from nine sites in the United States, a mean copper concentration of 281 mg/kg (dry weight) was obtained with range of 36.4–424 mg/kg (He et al. 1995). Lisk et al. (1992) reported copper concentrations in composts formed from yard waste ranging from 22.7 to 327 ppm, from sewage sludge ranging from 432 to 1,019 ppm and from municipal solid waste ranging from 191 to 1,143 ppm.

Bolan et al. (2003) analyzed copper in farm effluent and sludge samples at dairy and pig farms that utilized copper hydroxide and at farms that did not use copper hydroxide. The concentration of total copper was higher at farms that used the compound. Copper concentration was higher in the sludge samples than the effluent. At dairy farms utilizing copper hydroxide, copper concentration ranged from 52 to 105 mg/kg in sludge and from 2.5 to 10.5 mg/l in effluent. At pig farms utilizing copper hydroxide, copper concentrations ranged from 12.5 to 526 mg/kg in sludge and from 0.1 to 1.55 mg/l in effluent.

Copper concentrations in waste from the combustion of municipal solid waste and other combustion processes have been reported. Copper in incinerator bottom ash and fly ash has been measured at mean concentrations of 1,700 and 1,000 mg/kg, respectively (Goldin et al. 1992). Buchholz and Landberger (1995) report concentrations of copper of 390–530 µg/g in fly ash, 1,560–2,110 µg/g in bottom ash, and 1,140–1,540 µg/g in combined ash. In sewage sludge incineration process steams, copper concentrations were 4,561 mg/kg in sludge cake, 3,465 mg/kg in bottom ash, 3,707 mg/kg in cyclone ash, 3,684 mg/kg in scrubber particulate matter, and 6,666 mg/kg in stack particulate matter (Balogh 1996). In fossil fuel wastes, copper concentrations of 33–2,200 mg/kg in fly ash, 4–930 mg/kg in bottom ash, 6–340 mg/kg in

5. POTENTIAL FOR HUMAN EXPOSURE

flue gas desulfurization sludge, 10–130,000 mg/kg oil ash, and 2–190 mg/kg in coal have been obtained (Eary et al. 1990).

Copper concentrations have been measured in several types of electronic and e-waste. The concentration of copper was 276,186–423,727 mg/kg in discarded basic phones and 268,945–434,628 mg/kg in discarded smartphones (Singh et al. 2019). The average concentration in basic phones and smartphones was 378,406 and 357,560 mg/kg, respectively. The average weight of copper in different electronic devices is: 700,300 mg in plasma TVs, 625,600 mg in color CRT TVs, 206,000 mg in LCD TVs, 102,800 mg in laptop computers, 59,500 mg in LCD monitors, and 18,800 mg in cell phones (Woo et al. 2016). In an assessment of hazardous chemicals in a market-representative set of waste printed circuit boards (WPCBs) originating from computers manufactured from 1996–2010, copper was found ranging from 177,000 to 268,000 mg/kg and was the most abundant metal in the WPCBs (Chen et al. 2016). In WPCBs, copper is used to transmit electric signals and is fundamental but results from the study show that technological innovation modeled by three types of Intel chipsets correlates with an overall decrease in copper concentration (Chen et al. 2016).

Copper may also be found in clothing. Herrero et al. (2020) analyzed 39 swimsuits made in Vietnam, China, Cambodia, Albania, Sri Lanka, Bangladesh, Tunisia, Spain, Morocco, and Myanmar. Copper was detected in 64% of the samples at an average concentration of 27.9 mg/kg, with concentrations ranging from less than 0.15 to 328 mg/kg. Although Herrero et al. (2020) does not specifically discuss the origins of copper in swimsuits, the authors do note that many swimsuits are made of artificial fibers so that they may be water repellant or fast drying. Metals may be used in the textile industry as dyes, antimicrobials, and water repellants (Herrero et al. 2020).

An assessment of trace metals in lip balms, lip glosses, and lipsticks found that copper was one of the three major trace metals found in lip cosmetics (Gao et al. 2018). Copper concentrations ranged from 11.07 to 136.73 mg/kg in the products sampled. The mean concentrations were 61.96 (lip balms), 81.28 (lip glosses), and 93.93 mg/kg (lipsticks).

Copper has been detected in pigments in American tattoo ink (Liszewski and Warshaw 2019). Of 44 distinct pigments identified, four contained copper. All four pigments were phthalocyanine. The most frequently used pigment containing copper is found in 13 tattoo ink brands and in 562 inks; the least frequently used is found in 1 brand and 1 ink.

Concentrations of copper in fertilizers, soil amendments, and other agricultural materials have been measured by Raven and Loeppert (1997). The materials and mean concentrations are urea (<0.6 µg/g),

5. POTENTIAL FOR HUMAN EXPOSURE

ammonium nitrate (<0.6 µg/g), ammonium sulfate (<0.6 µg/g), ammonium phosphate (<2–41.8 µg/g), potassium chloride (<2–3.5 µg/g), potassium-magnesium-sulfate (1.4–5 µg/g), North Carolina rock phosphate (9.6 µg/g), calcite (2.3 µg/g), corn leaves (9.4 µg/g), manure (17.5 µg/g), and austinite (300 µg/g). Copper was measured in cement dust from the United States at an average concentration of 23.66 ± 7.23 µg/g (Ogunbileje et al. 2013).

5.6 GENERAL POPULATION EXPOSURE

Due to the ubiquity of copper in the environment and the general occurrence of copper in airborne particulates, exposure to copper through inhalation is commonplace. Estimates of atmospheric copper concentrations from different source categories (e.g., smelters, ore processing, steel production, and combustion) yielded a maximum annual concentration of 30 µg/m³ (EPA 1987). If a person is assumed to inhale 20 m³ of air/day, this would amount to an average daily intake of 600 µg of copper. For the reported range of annual atmospheric copper concentrations, 5–200 ng/m³ (EPA 1987), the average daily intake by inhalation, would range from 0.1 to 4.0 µg. At the maximum reported ambient air concentration, 100 µg/m³ for a 24-hour period at a location within one-half mile of a major source (EPA 1987), the average daily intake would rise to 2,000 µg. These estimates assume that all of the copper is attached to particles of inhalable size, less than 10 µm in diameter.

The average daily dietary intake of copper from food is ~2 mg/day. The dietary intake of copper is expected to be above this average for those individuals who regularly consume organ meats (e.g., liver and kidney), nuts, seeds (including cocoa powder), legumes, and bran and germ portions of grains; these intakes are not expected to exceed the maximum recommended limits of 10–12 mg/day (WHO 1996). In the United States, Tolerable Upper Intake Levels vary by life stage, ranging from 1 mg/day for 1-year old children and 10 mg/day for adults and pregnant and lactating females 19-years old and older (Table 7-17). Those individuals who regularly consume oysters or clams may increase their dietary intake of copper by 2–150 mg/day when consuming 250 g of edible tissue per day, based on copper concentrations of 25–600 and 8.4–171 ppm in oysters and clams, respectively (Goldberg 1986; Perwak et al. 1980). Assuming a median copper concentration in drinking water of 75 µg/L, the average daily copper exposure from consumption of 2 L of water per day is 0.15 mg. However, many people may have high levels of copper in their tap water that were acquired during transport through the water distribution system. While corrosion can occur in plumbing of any age, new copper plumbing is a potential source of exposure as copper leaches into drinking water. In the presence of certain water qualities, copper levels in excess of the EPA action level (1.3 mg/L) are most likely to occur in newly constructed homes and buildings with copper plumbing, or at sites that have been recently renovated with new copper plumbing (Edwards et al.

5. POTENTIAL FOR HUMAN EXPOSURE

2001; EPA 1995; Grace et al. 2012; Knobeloch et al. 1998; Lagos et al. 2001; Rajaratnam et al. 2002; Schock and Sandvig 2009; Turek et al. 2011). If the system is not permitted to flush out, average intakes from water may be >2 mg/day. It is less likely that high dermal exposures will result from bathing in this tap water because the distribution system will flush itself out as the water is drawn. Data on serum copper from NHANES is presented in Table 5-21.

Table 5-21. Geometric Mean and Selected Percentiles of Serum Copper (in µg/L) for the U.S. Population from the National Health and Nutrition Examination Survey (NHANES) (CDC 2016, 2018)

	Survey years	Geometric mean (95% CI)	Selected Percentiles				Sample size
			50 th	75 th	90 th	95 th	
Total	13-14	1148.34 (1122.60-1174.68)	1135	1319	1547	1710	2520
	15-16	1146.60 (1124.94-1168.68)	1130	1314	1538	1692	2436
Age group							
12 – 19 years	13-14	1055.83 (1033.20-1078.96)	1036	1197	1414	1641	418
	15-16	1055.03 (1012.29-1099.57)	1031	1232	1408	1534	371
20 – 59 years	13-14	1161.59 (1129.35-1194.75)	1138	1343	1607	1787	1221
	15-16	1152.32 (1129.72-1175.38)	1124	1315	1600	1794	1165
60 years and older	13-14	1149.31 (1117.16-1182.39)	1165	1310	1472	1599	542
	15-16	1161.35 (1123.66-1200.31)	1150	1327	1479	1617	579
Sex							
Male	13-14	1032.39 (1001.14-1064.63)	1032	1173	1308	1414	1235
	15-16	1042.57 (1021.11-1064.49)	1043	1171	1332	1422	1201
Female	13-14	1271.39 (1246.35-1296.93)	1244	1453	1677	1908	1285
	15-16	1254.96 (1221.69-1289.15)	1241	1429	1672	1903	1235
Race/ethnicity							
Mexican American	13-14	1163.47 (1132.65-1195.12)	1157	1353	1567	1738	431
	15-16	1147.80 (1118.65-1177.70)	1131	1294	1534	1747	464
Other Hispanic	13-14	1181.15 (1126.79-1238.13)	1156	1375	1587	1656	235
	15-16	1142.06 (1115.41-1169.35)	1133	1323	1493	1741	334
Non-Hispanic white	13-14	1131.74 (1104.19-1159.97)	1111	1300	1504	1679	975
	15-16	1134.14 (1107.51-1161.40)	1117	1295	1476	1652	764
Non-Hispanic black	13-14	1250.99 (1217.36-1285.56)	1242	1469	1653	1763	516
	15-16	1270.74 (1228.30-1314.63)	1245	1452	1705	1959	494
Other race	13-14	1105.52 (1075.40-1136.49)	1082	1292	1455	1659	363
	15-16	1091.44 (1053.23-1131.04)	1095	1231	1486	1653	380

CI = confidence interval

A National Occupational Exposure Survey (NOES) conducted by NIOSH from 1981 to 1983 estimated that potentially 505,982 workers, including 42,557 women, were occupationally exposed to copper in the United States (NIOSH 1989). The NOES estimate is provisional because all of the data for trade name

5. POTENTIAL FOR HUMAN EXPOSURE

products that may contain copper have not been analyzed. Of the potential exposures, 1,073 are to pure copper, while in the other cases, the molecular form of copper was unspecified. Additionally, according to the NOES, 125,045 workers, including 38,075 women, were potentially exposed to copper sulfate (NIOSH 1988). The NOES was based on field surveys of 4,490 facilities and was designed as a nationwide survey based on a statistically valid sample of virtually all workplace environments in the United States where eight or more persons are employed in all standard industrial codes (SIC) except mining and agriculture. The exclusion of mining and agriculture is significant for estimating exposure to copper since there is a high potential for exposure in these industries. Current occupational exposure limits for copper fume are 0.2 and 1 mg/m³ for dust and mists (Frazier and Hage 1998).

Children are not small adults. A child's exposure may differ from an adult's exposure in many ways. Children drink more fluids, eat more food, breathe more air per kg of body weight, and have a larger skin surface in proportion to their body volume. A child's diet often differs from that of adults. The developing human's source of nutrition changes with age: from placental nourishment to breast milk or formula to the diet of older children who eat more of certain types of foods than adults. A child's behavior and lifestyle also influence exposure. Children crawl on the floor, put things in their mouths, sometimes eat inappropriate things (such as dirt or paint chips), and spend more time outdoors. Children also are closer to the ground, and they do not use the judgment of adults to avoid hazards (NRC 1993).

Children could be exposed to copper through contact with wood treated with alkaline copper quaternary (ACQ) (Cushing et al. 2007). ACQ, which contains copper oxide, is used to treat residential decks and playsets. Children might ingest ACQ from dislodged wood residues via hand to mouth contact or be exposed via dermal contact.

Exposure of copper through oral routes may differ between children and adults, due to differences in the consumption of various food groups between children and adults and ingestion of dust and soils. The dietary copper intake for infants who receive the major portion of their nutritional requirements from breast milk is likely to be different from infants whose nutritional needs are either supplemented or entirely received through the consumption of formula. Estimates of copper intake from inhalation and ingestion in children in the United States are limited. From the work of Pennington et al. (1986), the copper intakes from food consumption for a 6–11-month-old infant and a 2-year-old child were estimated to be 0.47 and 0.58 mg/day, respectively, values which are lower than the adult intake of ~1 mg/day. One study has provided estimated inhalation and ingestion exposures of copper for 6- to 10-year-old children in India (Raghunath et al. 1997). In this work, mean daily concentrations of copper in particulates in air from six locations were measured at 0.01–0.26 µg/m³. Based on these measurements, estimated inhalation

5. POTENTIAL FOR HUMAN EXPOSURE

exposures of children to copper were calculated to be 0.1–3.2 µg/day. In this same work, exposures to copper through ingestion were estimated to be between 684–1,732 µg/day.

Exposures of children to copper are likely to increase in areas where copper concentrations in air are expected to be high, such as mining sites, waste dump sites, smelters, and foundries. For example, copper burdens in children living near a lead smelter, as measured by copper concentration in teeth, increased closer to the smelter (Blanuša et al. 1990). Children are also at risk for increased copper intake through consumption of drinking water where leaching of copper from the distribution system has occurred (Murphy 1993; Yannoni and Piorkowski 1995). Copper-contaminated drinking water has been reported to create a light blue or blue-green color to water, and may result in a metallic, bitter taste (WHO 2004). This route of copper exposure can be minimized through the flushing of drinking water supply lines or increasing the pH of the water in the distribution system.

Arcega-Cabrera and Fargher (2016) measured copper in blood and urine samples of children in Mexico and found that 79.4% had copper detected in urine and 100% had copper detected in blood. The range of median copper in blood at nine elementary schools was 723.02 to 1143.7 µg/dL, and in urine ranged from below detection limit to 20.62 µg/dL. Using ethnographic data, Arcega-Cabrera and Fargher (2016) identified potential sources and pathways of exposure to metals. They concluded that children from poor or marginalized families tended to be exposed to copper while children from wealthier families tended to be exposed to inorganic copper (copper sulfate). There was a positive correlation between the frequency that children ate fresh fish and copper in blood, while there was a negative correlation between the frequency and copper in urine. This is likely due to the copper in fish being protein-bound. Since copper sulfate is used as a preservative in fresh fish and as a water treatment in ponds and other freshwater surfaces, children who eat fresh fish more often may be exposed to it. Piped or well water in the study was found to contain higher levels of copper than purified water, and children of poorer or more marginalized families who cooked with piped or well water had higher levels of copper in urine. Children from households cooking over open food fires also had higher levels of copper in urine than households cooking with gas.

5.7 POPULATIONS WITH POTENTIALLY HIGH EXPOSURES

In discussing exposure to copper, the important question is whether individuals are exposed to readily available copper, which in general means free (hydrated) Cu(II) ions and perhaps some weakly complexed or adsorbed small particulate copper ions. The data indicate that copper in natural water, sediment, and soil mainly exists in bound form. Even so, the free form of copper can be released readily from ingested materials, for example a child's sampling of soil contaminated with copper, followed by

5. POTENTIAL FOR HUMAN EXPOSURE

exposure to the low acidic pHs encountered in the stomach (Pizarro et al. 2001). Potential for high uptakes of copper in the general population may exist in situations where people consume large amounts of tap water that contains dissolved copper that come from corrosion of copper in the distribution system, or already have a high copper background due to natural or anthropogenic activities (e.g., close proximity to mining activities or mine drainage). Leaching of copper from water distribution system materials is likely to occur where the water is soft and not flushed out of the system by running the water down the drain before collecting some of it for use. In such cases, the initial concentration of copper frequently exceeds 1 ppm. A large fraction of the copper may be in the form of free cupric ion, and uptake will result by ingestion and, perhaps, dermal contact. Soluble cupric salts are used extensively in agriculture and in water treatment. Workers engaged in the formulation and application of these chemicals along with industrial workers, such as those in the plating industry, may come into dermal contact with absorbable copper ions. Exposure to high levels of free Cu(II) can occur, for example, from swimming in water that was recently treated with a copper-containing algicide.

Serum concentrations of copper were significantly elevated in users of skin-whitening agents (Iyanda et al. 2011). Copper concentrations ranged from 2.27 to 8.48 mg/kg in skin lightening creams sold in Nigeria (Sani et al. 2016; Theresa et al. 2011). Consumers who use skin-whitening agents could be at risk of high exposure to copper.

Based on the available data, people living close to NPL sites may be at greater risk for exposure to copper than the general population. In this case, exposure can occur through inhalation of airborne particulates from the NPL sites, ingestion of water from private wells in close proximity to the sites, ingestion of contaminated soil, and/or uptake of copper into fruits and vegetables raised in gardens of residents living near NPL sites.

People living near copper smelters and refineries, and workers within these and other industries can be exposed to high levels of dust-borne copper by both inhalation and ingestion. In some industries, workers may be exposed to fumes or very fine dust that may be more hazardous than coarse-grained dust, because it can be inhaled and penetrate more deeply into the lung, thereby evading the mucocilliary escalator.

Exposure to ultrafine particles of copper poses a risk to human health due to their smaller size, larger surface area, surface material, and physical characteristics (Schraufnagel 2020). Traffic exhaust is a common source of exposure, although homes near a trash burning site, bedrooms with burning coils for mosquito abatement, homes with smokers, and kitchens during domestic cooking are also sources of exposure to ultrafine particles (Schraufnagel 2020). Particles created by brake wear, including copper

5. POTENTIAL FOR HUMAN EXPOSURE

particles, are in the range of 2.8 μm (Wahlin et al. 2006). Copper has been identified in ultrafine particles leading to metal fume fever among welders (Schraufnagel 2020).